



KATALOG CATALOGUE

2022



A —————
ARCTIC **160**

B —————
BRECCIA SARDA **88**
BOTTICINO **122**
BIANCA **190**

C —————
CEMENT **24**
CHIC **58**
CONGO **73**
CASTELLO **77**
COMFORT **164**
CARRARA **168**

D —————
DOMUS **62**

E —————
EAGLE **94**
ELEGANT **136**

F —————
FORUM **38**
FEELING **50**
FUSION **186**

G —————
GLAM **108**

H —————
HARDROCK **46**
HABITAT **172**

I —————
IMPERIAL **102**

J —————
JUPITER **14**
JOY **132**

K —————
KASHMIR **142**
KINGSTONE **150**

L —————
LUXOR **30, 118**
LAND **66**
LIMESTONE **150**

M —————
MEMENTO **42**
MARMO BIANCO **82**
MERCURY **146**
MARFIL **156**
MAIOLICA **178**

R —————
RAPOLANO **34**

S —————
SPACE **8**
STYLE **54**
SNOW **114**
SMART **126**

V —————
VEGA **20**
VIA STRADA / ROTONDA **69**

MONOKOLORI MONOCOLORS

SNOW	114
JOY	132
BIANCA	190

RUSTIK RUSTIC

MAIOLICA	178
----------	------------

TEKSTIL TEXTILE

ARCTIC	160
COMFORT	164
HABITAT	172

DRVO WOOD

FEELING	50
STYLE	54
CHIC	58
DOMUS	62

BETON CONCRETE

CEMENT	24
SMART	126
MERCURY	146
EAGLE	94

MERMER MARBLE

MARMO BIANCO	82
BRECCIA SARDA	88
IMPERIAL	102
LUXOR	30, 118
KASHMIR	142
CARRARA	168
FUSION	186

KAMEN STONE

SPACE	8
JUPITER	14
VEGA	20
RAPOLANO	34
FORUM	38
MEMENTO	42
HARDROCK	46
LAND	66
VIA STRADA / ROTONDA	69
CONGO	73
CASTELLO	77
BOTTICINO	122
ELEGANT	136
KINGSTONE	150
GLAM	108
LIMESTONE	182
MARFIL	156



25x75

59x59



29,5x59

15x60


RETT

RETT

SPACE		•	•	
JUPITER		•	•	
VEGA		•	•	
CEMENT		•	•	
LUXOR		•		
RAPOLANO				
FORUM				
MEMENTO			•	
HARDROCK				
FEELING				•
STYLE				•
CHIC				•
DOMUS				
LAND				
VIA STRADA / ROTONDA				
CONGO				
CASTELLO				
MARMO BIANCO	•	•		
BRECCIA SARDA	•	•		
EAGLE	•			
IMPERIAL	•			
GLAM	•			
SNOW	•			
LUXOR	•			
BOTTICINO				
SMART				
JOY				
ELEGANT				
KASHMIR				
MERCURY				
KINGSTONE				
MARFIL				
ARCTIC				
COMFORT				
CARRARA				
HABITAT				
MAIOLICA				
LIMESTONE				
FUSION				
BIANCA				



					8
					14
					20
					24
					30
					34
					38
					42
					46
					50
					54
					58
					62
					66
					69
					73
					77
					82
					88
					94
					102
					108
					114
					118
					122
					126
					132
					136
					142
					146
					150
					156
					160
					164
					168
					172
					178
					182
					186
					190

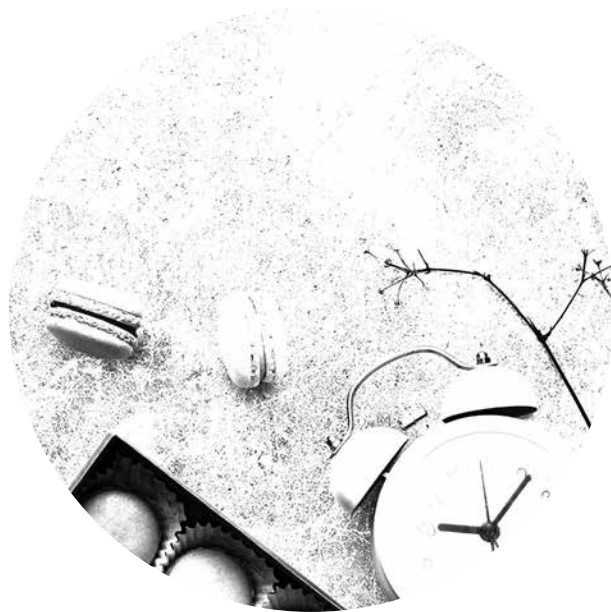

Gres Porcelain

SQUARE AFFAIR

SPACE 8, JUPITER 14, VEGA 20, CEMENT 24, LUXOR 30, RAPOLANO 34, FORUM 38, MEMENTO 42,
HARDROCK 46, FEELING 50, STYLE 54, CHIC 58, DOMUS 62, LAND 66, VIA STRADA/ROTONDA 69,
CONGO 73, CASTELLO 77

Jednostavnost i elegancija sinonimi su za novu seriju pločica Space. Upravo zbog toga, idealno se uklapaju uz različite stilove opremanja od minimalizma, preko klasičnog, pa sve do industrijskog. Zbog svoje mirne grafike, možete ih uklapati uz široku paletu boja, u zavisnosti od ličnog afiniteta i stila.

Simplicity and elegance are synonymous for the new Space tile series. Precisely because of that, they fit perfectly with different styles of furnishing - from minimalism, through classic, all the way to industrial. Due to their calm graphics, you can fit them with a wide range of colors, depending on personal affinity and style.




BEIGE



TITAN



29,5x59
RETT



59x59
RETT



8,8 mm



9,0 mm

Space

SQUARE AFFAIR



NOVO
NEW



RECTIFIED GRES PORCELAIN




NOVO
NEW

POD | FLOOR:
SPACE TITAN 59x59 RETT



NOVO
NEW

POD | FLOOR:
SPACE OUTDOOR BEIGE 29,5x59 RETT



NOVO
NEW

DIN 51097
DIN 51130

PEI
4

8



SPACE BEIGE 29,5x59 cm RETT / FT

PEI
3


8



SPACE TITAN 29,5x59 cm RETT / FT

PEI
4

8

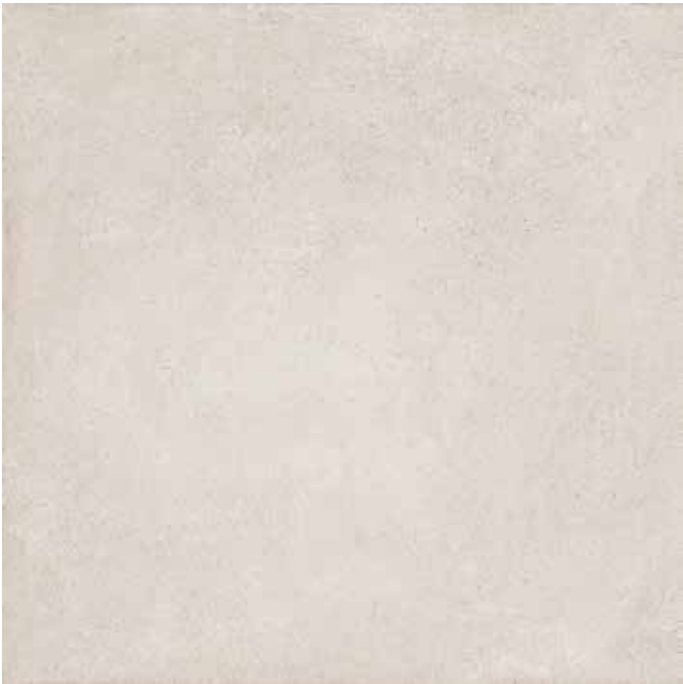

SPACE BEIGE RETT 59x59 cm / FT





PEI
3

8



SPACE TITAN RETT 59x59 cm / FT

SLOGOVI / PATTERNS



PEI
4

8



SPACE OUTDOOR BEIGE 29,5x59 cm RETT / FT

PEI
3

8



SPACE OUTDOOR TITAN 29,5x59 cm RETT / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
29,5x59	0,17405	6	1,044	18,36	50,112	910,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	
59x59	0,3481	4	1,392	25,20	41,760	780,00		

Bogata grafika kamena prenesena je na seriju Jupiter. Uz neverovatne detalje, odlikuju je i četiri pažljivo odabrane boje koje se mogu uklapati u najrazličitije ambijente i stilove. Za koju god boju da se opredelite, pločice iz ove serije prostoriji pružaju raskošan izgled.

Rich stone graphics is transferred to Jupiter series. In addition to incredible details, it is characterized by four carefully selected colors that can fit into a variety of ambiances and styles. Whatever color you choose, the tiles from this series provide your rooms a luxurious look.




ICE




BEIGE



DARK



BROWN



29,5x59
RETT



59x59
RETT



8,8 mm




9,0 mm

Jupiter

SQUARE AFFAIR




RECTIFIED GRES PORCELAIN

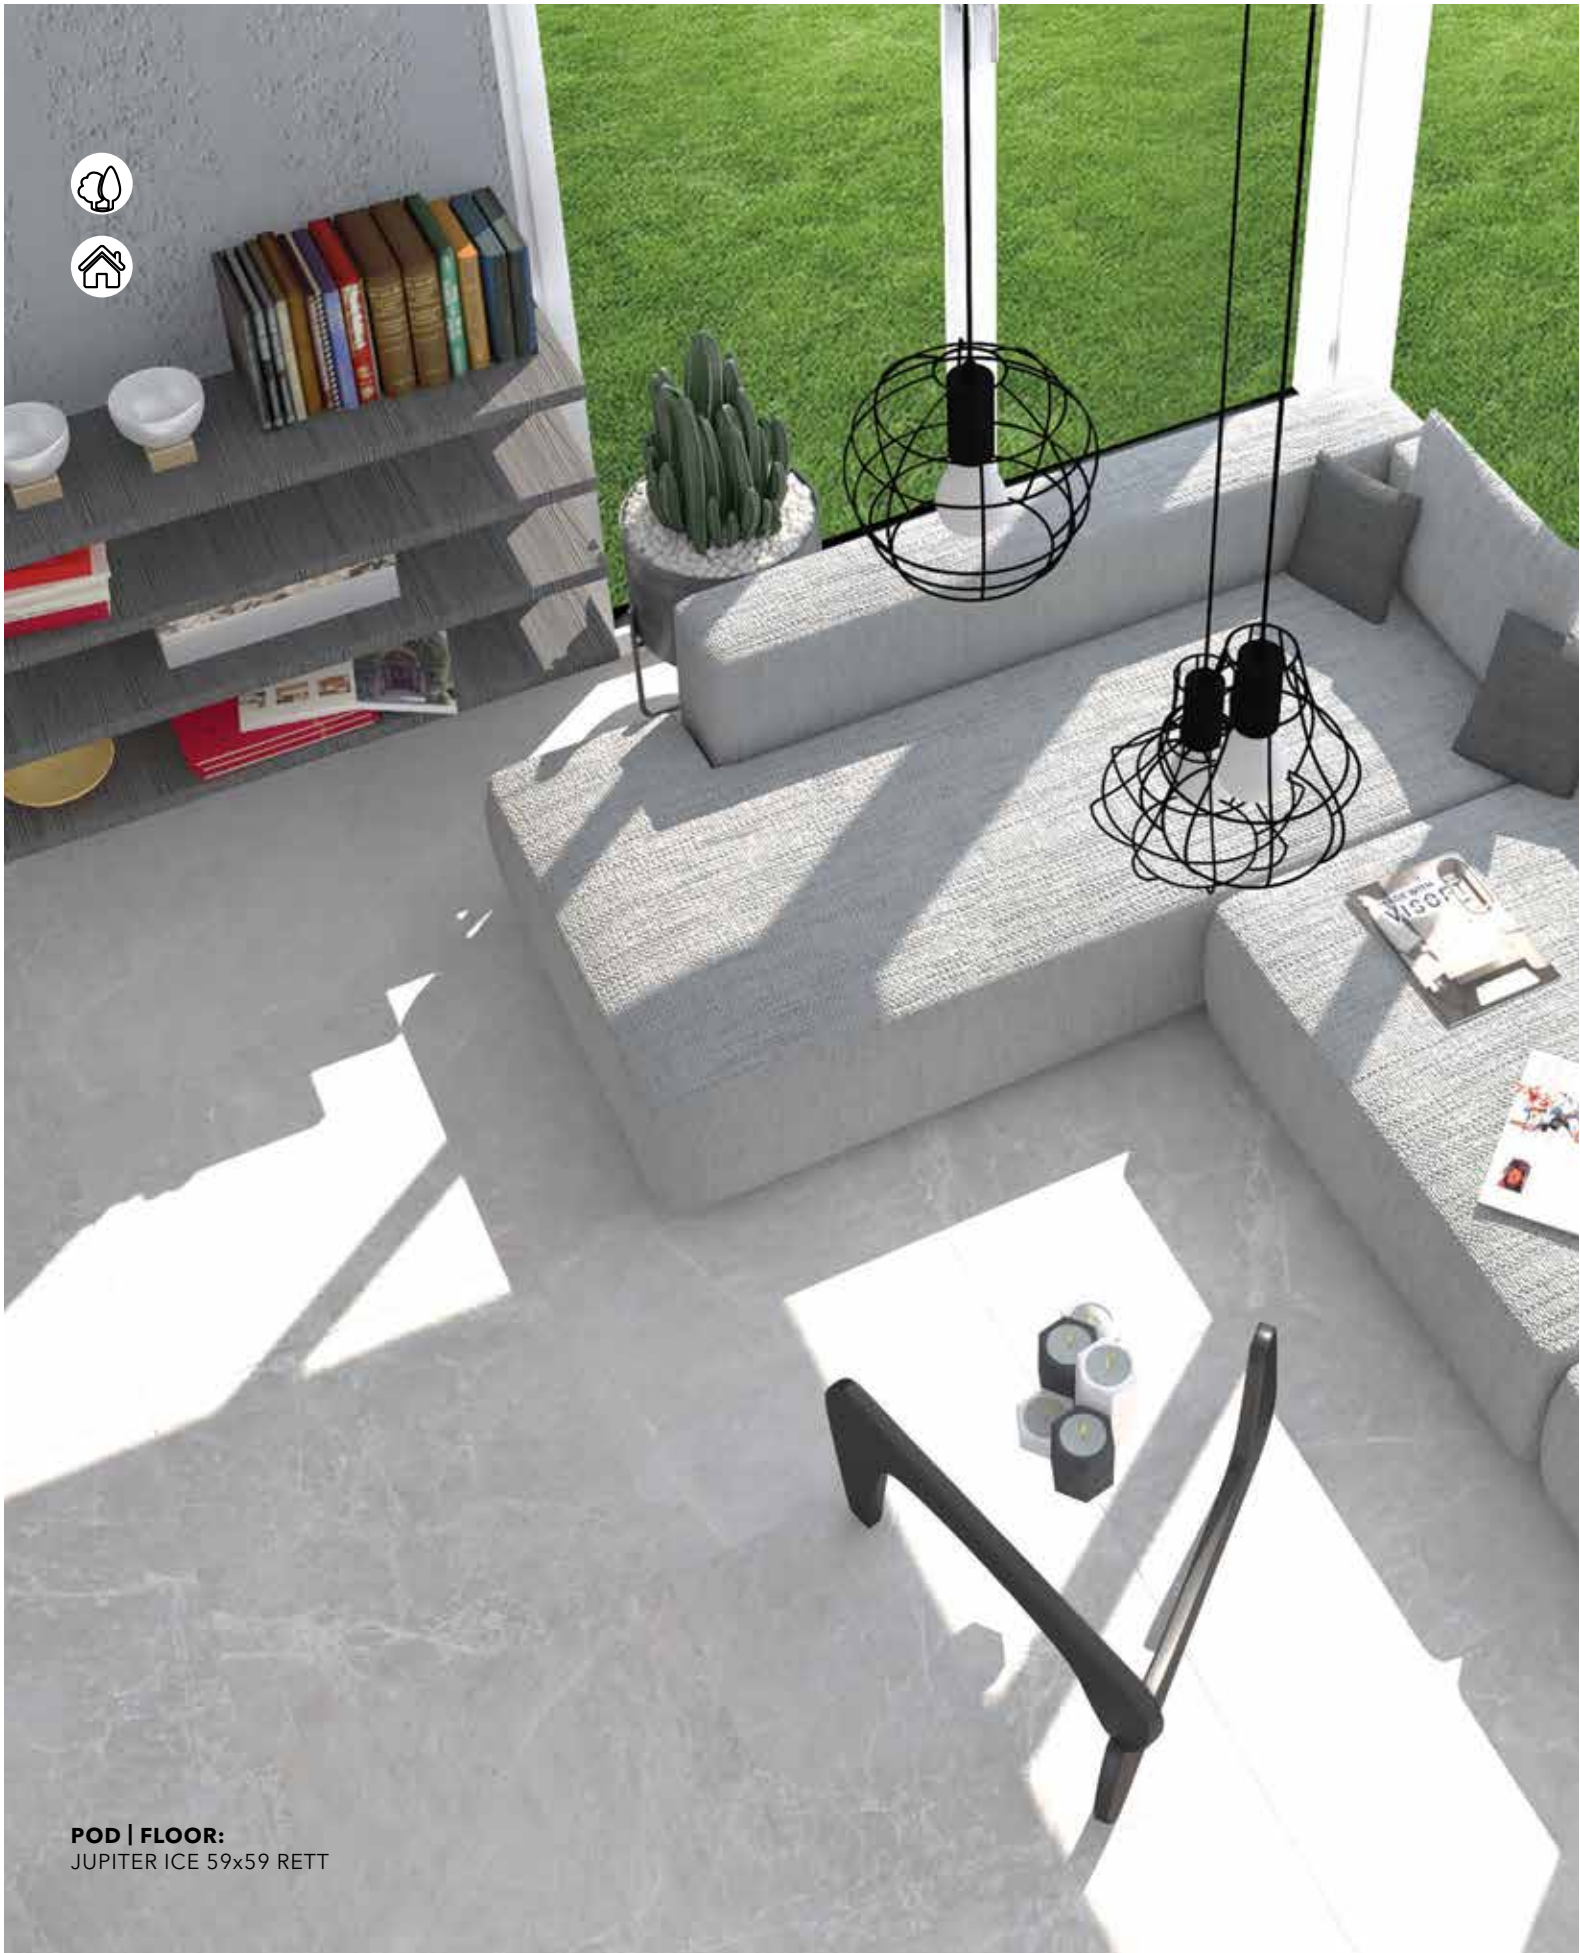

POD | FLOOR:
JUPITER ICE 59x59 RETT



ZID | WALL:
JUPITER BROWN 29,5x59 RETT
POD | FLOOR:
JUPITER BEIGE 59x59 RETT



DIN 51097 DIN 51130



JUPITER ICE 29,5x59 cm **RETT** / FT/WT



JUPITER BEIGE 29,5x59 cm **RETT** / FT/WT







JUPITER DARK 29,5x59 cm **RETT** / FT/WT



JUPITER BROWN 29,5x59 cm **RETT** / FT/WT

SLOGOVI / PATTERNS



PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
29,5x59	0,17405	6	1,044	18,36	50,112	910,00	IN INSERT KOM / PC	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
59x59	0,3481	4	1,392	25,20	41,760	780,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



DIN 51097 DIN 51130



PEI 4
8

JUPITER R ICE 59x59 cm RETT / FT



PEI 4
8

JUPITER R BEIGE 59x59 cm RETT / FT



PEI 3
8

JUPITER R DARK 59x59 cm RETT / FT



PEI 3
8


JUPITER R BROWN 59x59 cm RETT / FT

Mirni tonovi i suptilni detalji grafike čine seriju Vega idealnim izborom za sve ljubitelje minimalizma. Zahvaljujući neutralnim bojama, ova pločica prostoru daje čist i uredan izgled, zbog čega je veoma lako uklopiti nameštaj i različite boje detalja uz nju.


The calm tones and subtle details of the graphics make the Vega series an ideal choice for all lovers of minimalism. Thanks to the neutral colors, this tile gives the space a clean and tidy look, which makes it very easy to fit furniture and different colors of details along with it.



CREMA



29,5x59
RETT



59x59
RETT



8,8 mm



9,0 mm

Vega

SQUARE AFFAIR







RECTIFIED GRES PORCELAIN




ZID | WALL:
VEGA CREMA 29,5x59 RETT
VEGA DESERT 29,5x59 RETT
POD | FLOOR:
VEGA 59x59 RETT

SLOGOVI / PATTERNS



PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
29,5x59	0,17405	6	1,044	18,36	50,112	910,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	
59x59	0,3481	4	1,392	25,20	41,760	780,00		



DIN 51097 DIN 51130



PEI 4
12

VEGA CREMA 29,5x59 cm RETT / FT/WT



PEI 4
4

VEGA DESERT 29,5x59 cm RETT / FT/WT



DIN 51097 DIN 51130



PEI 4
6

VEGA CREMA 59x59 cm RETT / FT

Već nekoliko godina apsolutni
favorit u opremanju enterijera je reprodukcija
betona, idealno preneti na seriju Cement. Boje
su izabrane tako da će vašem prostoru pružiti
osećaj topline, čak i ako se odlučite za
industrijski stil opremanja enterijera.


For several years now, the absolute favorite in
interior design has been the reproduction
of concrete, ideally transferred to the
Cement series. The colors are chosen so that
they will give your space a feeling of warmth,
even if you opt for an industrial style of interior
design.



BEIGE




BONE




SMOKE



LIMESTONE



29,5x59
RETT



59x59
RETT



8,8 mm



9,0 mm

Cement

SQUARE AFFAIR







RECTIFIED GRES PORCELAIN




ZID | WALL:
CEMENT LIMESTONE 29,5x59 RETT
FEELING NOCE 15x60

SLOGOVI / PATTERNS



CEMENT



DIN 51097 DIN 51130

PEI 4
8



CEMENT BONE 29,5x59 cm **RETT** / FT/WT

PEI 4
8



CEMENT BEIGE 29,5x59 cm **RETT** / FT/WT

PEI 3
8



CEMENT SMOKE 29,5x59 cm **RETT** / FT/WT


PEI 4
8



CEMENT LIMESTONE 29,5x59 cm **RETT** / FT/WT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION		PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT	WALL TILES / ZIDNE PLOČICE M ²	
							FT	FLOOR TILES / PODNE PLOČICE M ²	
							LI	LISTELA KOM / PC	
29,5x59	0,17405	6	1,044	18,36	50,112	910,00	IN	INSERT KOM / PC	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
59x59	0,3481	4	1,392	25,20	41,760	780,00	RETT	REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

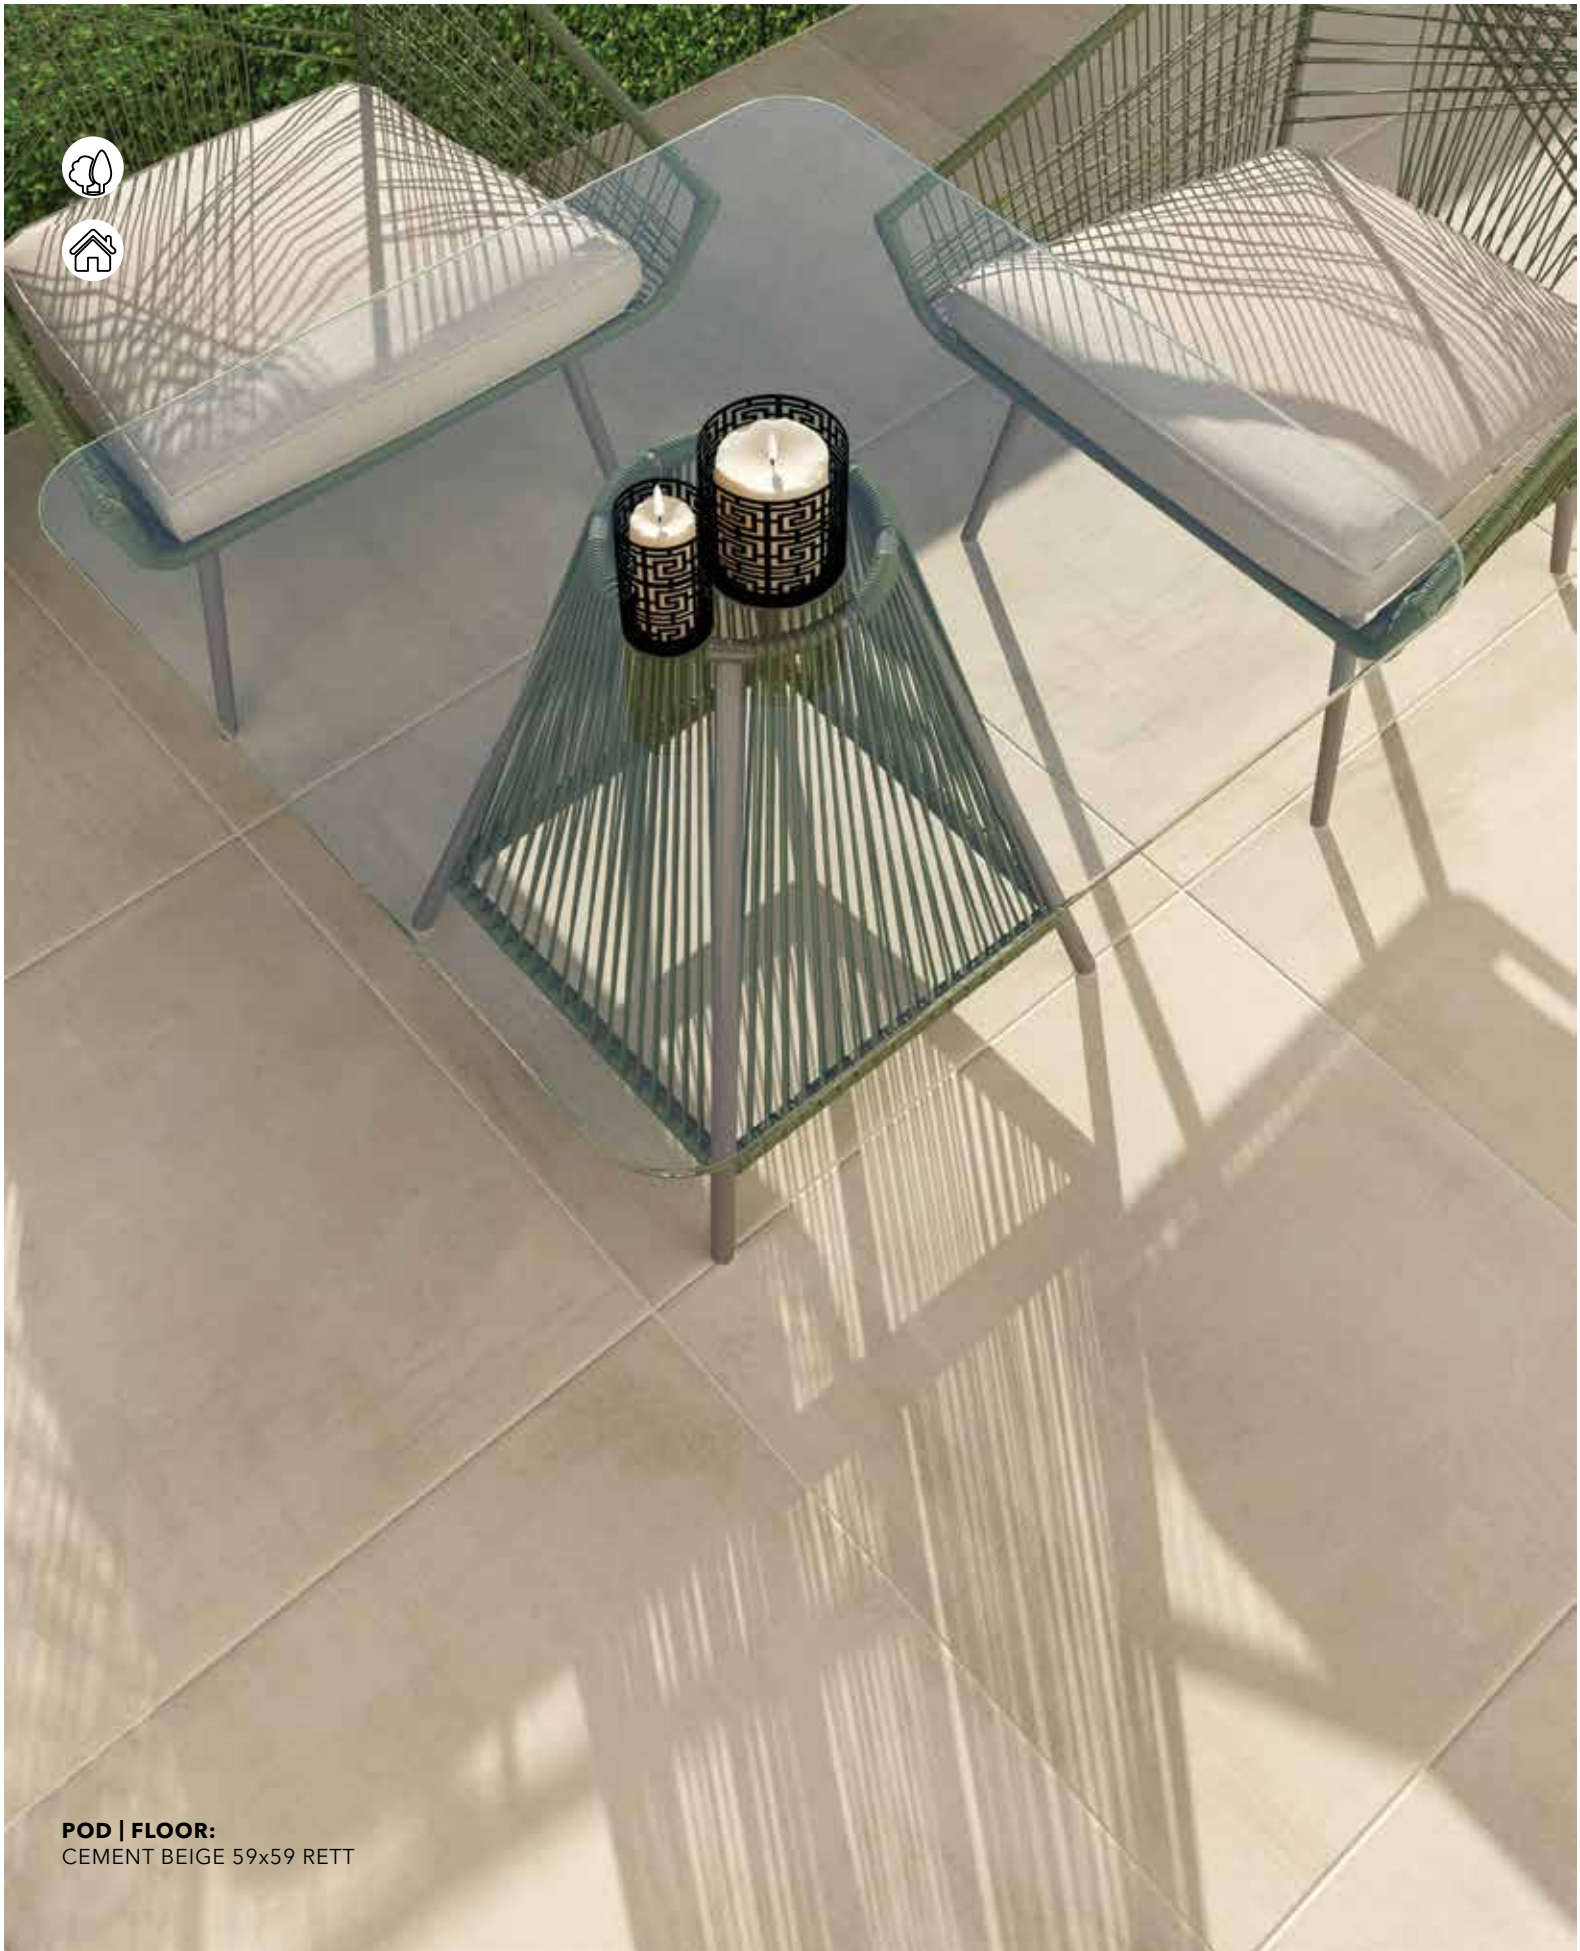

POD | FLOOR:
CEMENT BEIGE 59x59 RETT



DIN 51097 DIN 51130



PEI 4
8

CEMENT BONE RETT 59x59 cm / FT



PEI 4
8

CEMENT BEIGE RETT 59x59 cm / FT



PEI 3
8

CEMENT SMOKE RETT 59x59 cm / FT



PEI 4
8

CEMENT LIMESTONE RETT 59x59 cm / FT

Mermer kao večita inspiracija za opremanje enterijera. Seriju Luxor čine detalji crnog mermera sa modernim i upadljivim venama. Odličan je izbor za postizanje efekta raskoši i vanvremenske elegancije.

Marble as an eternal inspiration for interior design. The Luxor series consists of a details of black marble with modern and striking veins. It is an excellent choice for achieving the effect of luxury and timeless elegance.



LUXOR



59x59
RETT



9,0 mm

Luxor

SQUARE AFFAIR




RECTIFIED GRES PORCELAIN



POD | FLOOR:
LUXOR 59x59 RETT



DIN 51097 DIN 51130

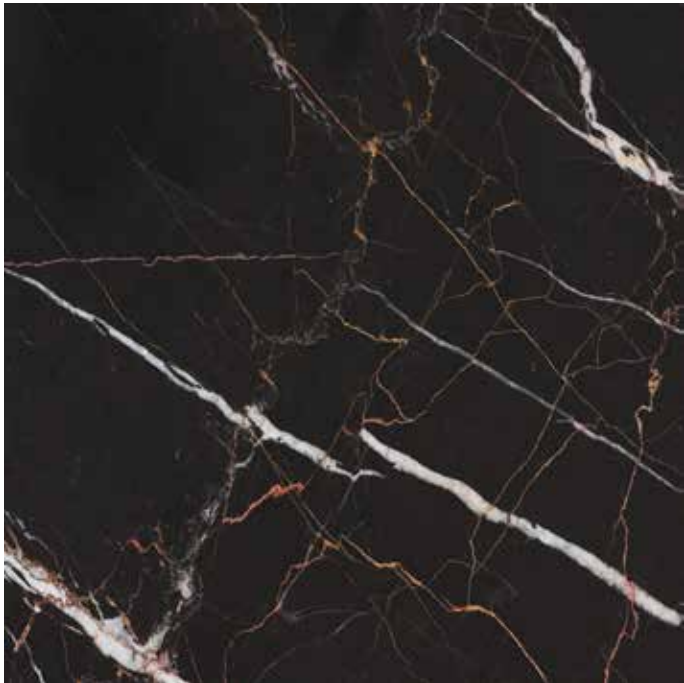

PEI
2

6

LUXOR 59x59 cm **RETT** / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
59x59	0,3481	4	1,392	25,20	41,760	780,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Pločice serije Rapolano odlikuje bogatstvo detalja mediteranskog kamena. Tople nijanse upotpunjuju osećaj udobnosti, zbog čega je ova serija dobar izbor za letnjikovce, bašte i terase. Savršeno se slaže uz rustične detalje i stil opremanja.

The tiles of the Rapolano series are characterized by a wealth of details of Mediterranean stone. Warm shades complete the feeling of comfort, which is why this series is a good choice for summer houses, gardens and terraces. It goes perfectly with rustic details and style of furnishing.



MONTI



TRASTEVERE



30x60



8,8 mm

Rapolano

SQUARE AFFAIR



GRES PORCELAIN



POD | FLOOR:
RAPOLANO TRASTEVERE 30x60



DIN 51097 DIN 51130



RAPOLANO MONTI 30x60 cm / FT



RAPOLANO TRASTEVERE 30x60 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
30x60	0,1800	6	1,080	19,32	51,840	965,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

Stari, pohabani kamen postao je imperativ u opremanju enterijera. Njegova lepota je u mogućnosti kombinovanja sa različitim stilovima. I ako je reč o imitaciji kamena, pažljiv odabir boja pločica serije Forum za krajnji rezultat pruža efekat vanvremenske topline enterijera.

Old, shabby stone has become an imperative in interior design. Its beauty is in possibility to be combined with different styles. And when it comes to the imitation of stone, careful selection of tile colors of the Forum series for the end result provides the effect of timeless warmth of interior.



SAND



LIGHT



30x60



8,8 mm

Forum

SQUARE AFFAIR



GRES PORCELAIN



POD | FLOOR:
FORUM SAND 30x60



DIN 51097 DIN 51130



FORUM LIGHT 30x60 cm / FT



FORUM SAND 30x60 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
30x60	0,1800	6	1,080	19,32	51,840	965,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

Reprodukcija stilizovanog kamena u kombinaciji sa nežnim i neutralnim tonovima čini seriju Memento favoritom među projektnim pločicama. Zbog svog suptilnog dizajna i detalja, može se kombinovati sa najrazličitijim stilovima opremanja. Savršen je izbor za ljubitelje minimalizma i pročišćenih linija.

The reproduction of stylized stone in combination with gentle and neutral tones makes the Memento series a favorite among project tiles.

Due to its subtle design and details, it can be combined with a variety of furnishing styles. It is a perfect choice for fans of minimalism and refined lines.



ICE



DARK



29,5x59
RETT



8,8 mm

Memento

SQUARE AFFAIR



GRES PORCELAIN




ZID | WALL:

MEMENTO ICE 29,5x59 RETT

MEMENTO DARK 29,5x59 RETT

POD | FLOOR:

MEMENTO ICE 29,5x59 RETT



DIN 51097 DIN 51130



PEI 4
8

MEMENTO ICE 29,5x59 cm **RETT** / FT/WT



PEI 3
8

MEMENTO DARK 29,5x59 cm **RETT** / FT/WT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
29,5x59	0,17405	6	1,044	18,36	50,112	910,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

Topli tonovi zemlje i peska odlika su serije Hardrock. Ova pločica za spoljnu upotrebu idealna je za bašte, terase i stepeništa. Zahvaljujući lepoti detalja, za koju god boju da se odlučite vaša mala oaza mira dobiće prefinjen izgled mediteranskog stila.

Warm tones of soil and sand are the hallmarks of the Hardrock series. This tile for outdoor use is ideal for gardens, terraces and staircases. Thanks to the beauty of the details, whatever color you choose, your little oasis of peace will get a refined look of the Mediterranean style.



GREY



WHITE



TERRA



30x60




8,8 mm

Hardrock

SQUARE AFFAIR



GRES PORCELAIN

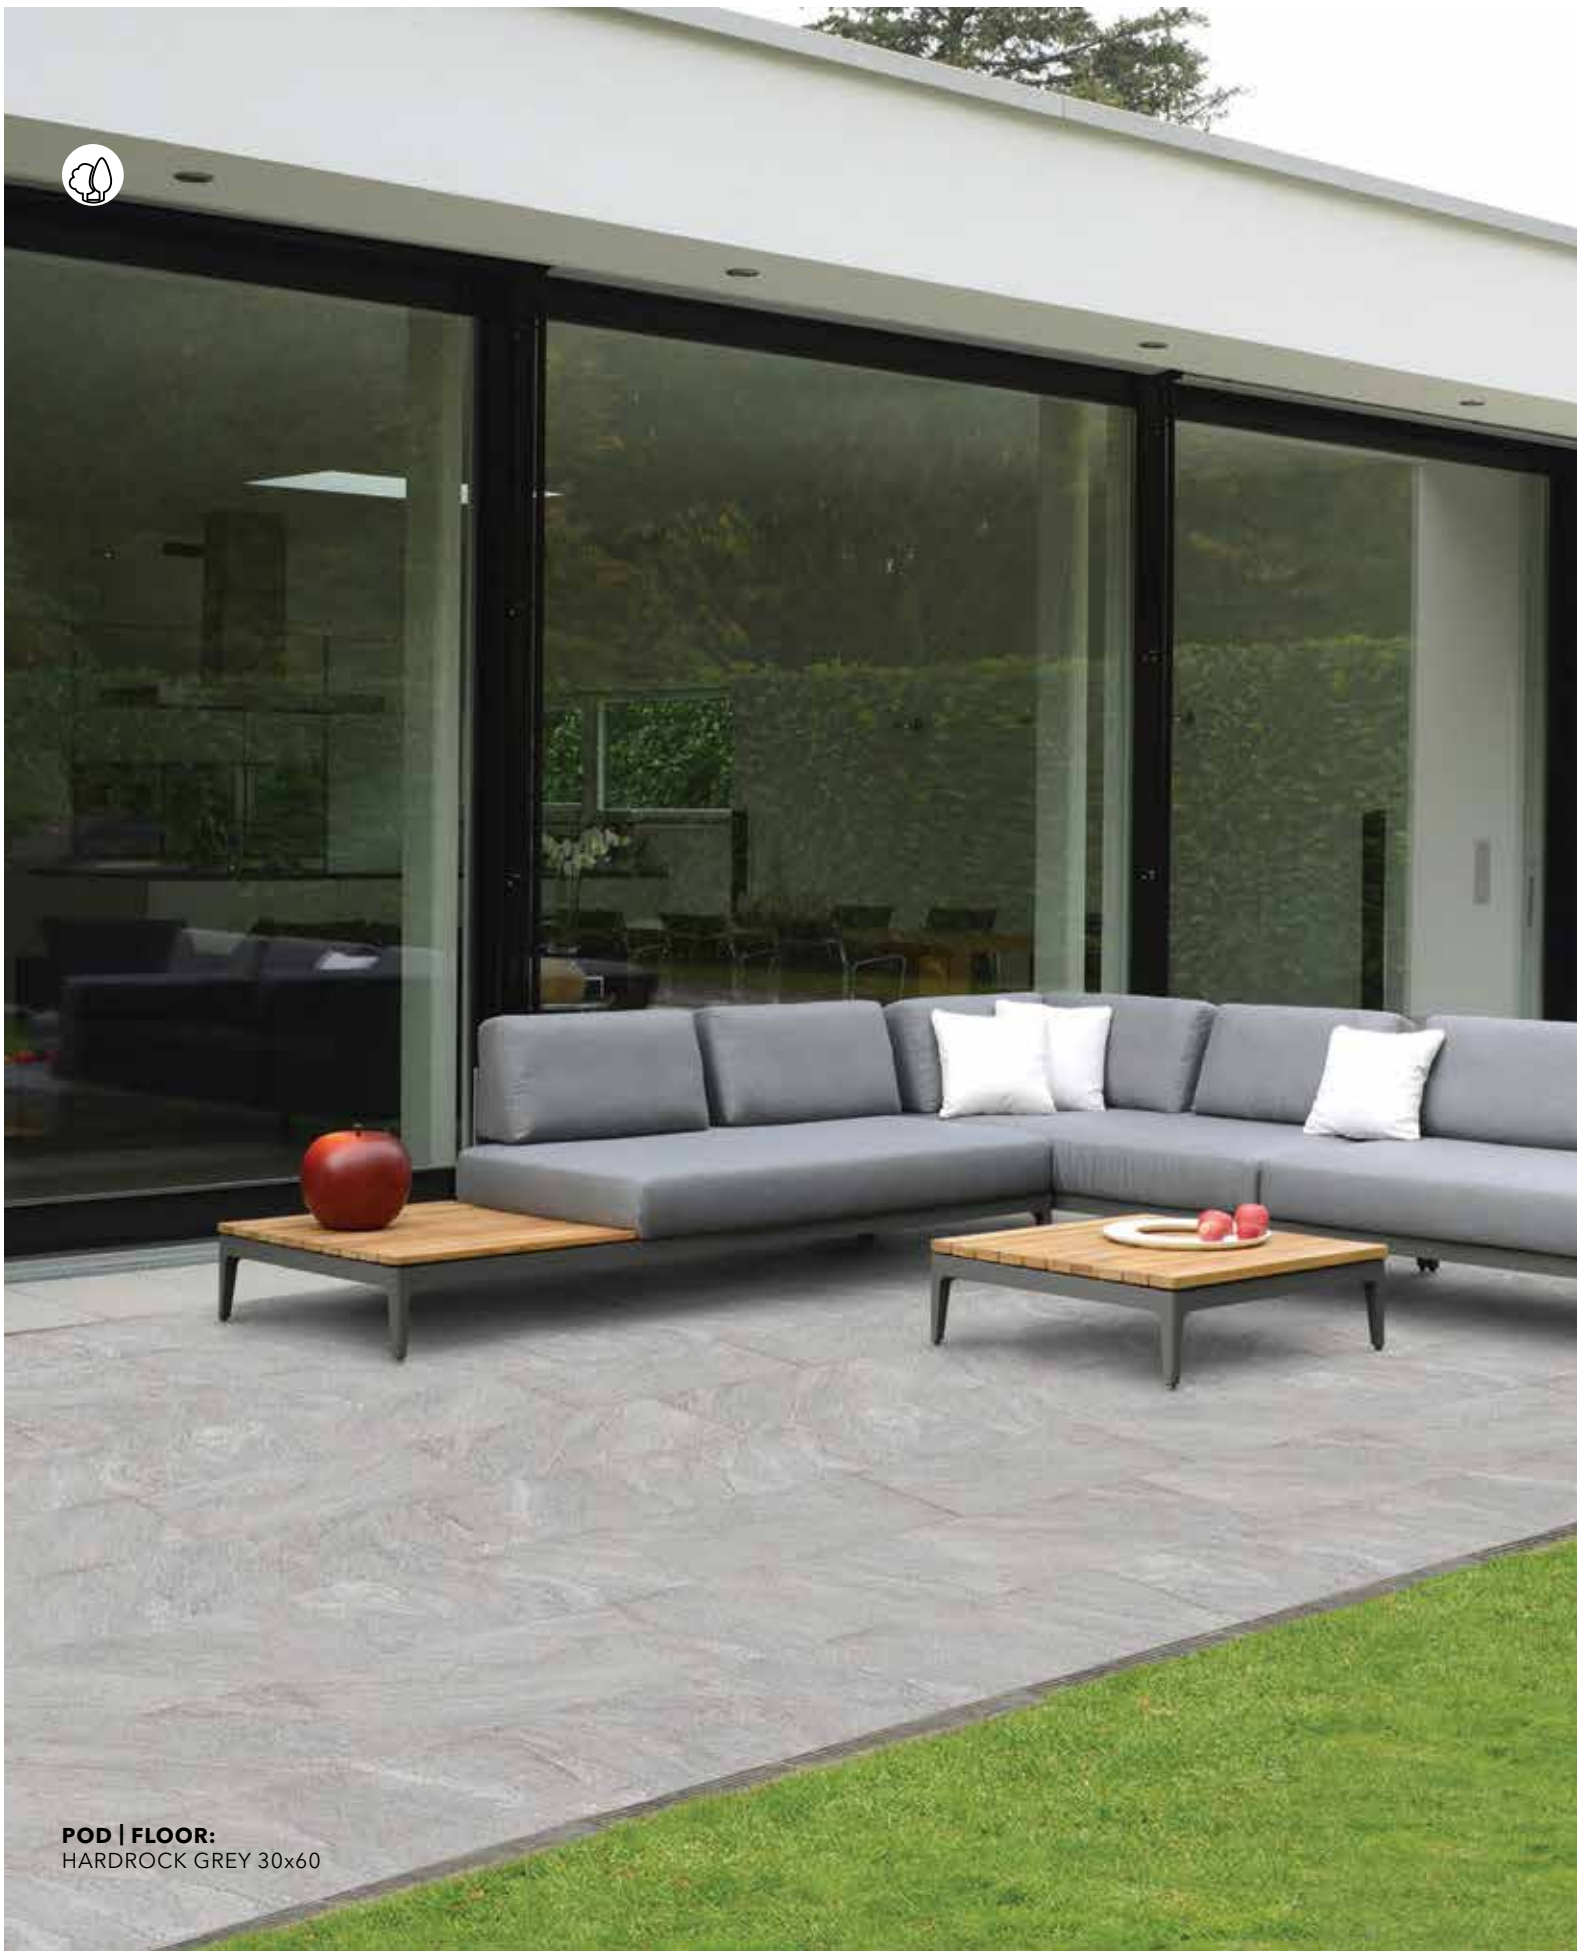

POD | FLOOR:
HARDROCK GREY 30x60



DIN 51097 DIN 51130



PEI 4
8

HARDROCK WHITE 30x60cm / FT



PEI 4
8

HARDROCK TERRA 30x60 cm / FT



PEI 4
8

HARDROCK GREY 30x60 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
30x60	0,1800	6	1,080	19,32	51,840	965,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Dekor drveta kao večna elegancija. Svi detalji i umeren reljef drveta preneti su na seriju Feeling.

Tri boje u okviru ove serije odabrane su tako da se uklapaju dobro uz rustični, skandinavski ili minimalistički stil opremanja. Odabirom ove serije sigurno ćete postići efekat elegancije i topline u svom prostoru.

Wood decor as eternal elegance. All the details and moderate relief of the wood have been transferred to the Feeling series. The three colors within this series have been chosen to fit well with the rustic, Scandinavian or minimalist style of furnishing. By choosing this series, you will surely achieve the effect of elegance and warmth in your space.




BEIGE




ANTICO



NOCE



15x60



30x60



8,8 mm



8,8 mm

Feeling

SQUARE AFFAIR



GRES PORCELAIN



POD | FLOOR:
FEELING BEIGE 15x60



DIN 51097 DIN 51130



FEELING BEIGE 30x60 cm / FT



FEELING BEIGE 15x60 cm / FT



FEELING ANTICO 15x60 cm / FT



FEELING ANTICO 30x60 cm / FT



FEELING NOCE 15x60 cm / FT



FEELING NOCE 30x60 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	
							WT	WALL TILES / ZIDNE PLOČICE M ²
							FT	FLOOR TILES / PODNE PLOČICE M ²
							LI	LISTELA KOM / PC
15x60	0,0900	11	0,990	18,81	55,440	1080,00	IN	INSERT KOM / PC
30x60	0,1800	6	1,080	19,32	51,840	965,00	RETT	REKTIFIKOVANA PLOČICA / RECTIFIED TILE
								PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
								PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM

Još jedna prelepa reprodukcija drveta preneti na seriju Style. Ovu seriju odlikuju dve nežne boje odabrane tako da se mogu uklopiti uz najrazličitije stilove opremanja enterijera.

Another beautiful reproduction of wood transferred to the Style series. This series is characterized by two delicate colors selected so that they can fit into a variety of interior design styles.



BEIGE



GREY



15x60



8,8 mm

Style

SQUARE AFFAIR



GRES PORCELAIN



POD | FLOOR:
STYLE GREY 15x60



DIN 51097 DIN 51130

PEI
4

7



STYLE BEIGE 15x60 cm / FT

PEI
4

7



STYLE GREY 15x60 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	
							WT	WALL TILES / ZIDNE PLOČICE M ²
							FT	FLOOR TILES / PODNE PLOČICE M ²
							LI	LISTELA KOM / PC
							IN	INSERT KOM / PC
15x60	0,0900	11	0,990	18,81	55,440	1080,00	RETT	REKTIFIKOVANA PLOČICA / RECTIFIED TILE
							PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT	
							PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM	

Seriya Chic je apsolutni favorit kupaca.
Nju odlikuje samo jedna osnovna boja pločice
i deset potpuno različitih lica imitacije detalja
rustičnog drveta. Zahvaljujući bogatstvu detalja,
reljefa i varijaciji tonova, ova serija svakoj prostorji
pruža efekat raskoši i topline.

The Chic series is an absolute favorite of
customers. It is characterized by only one basic
color of the tile and ten completely different faces
with imitation of rustic wood detailes. Thanks
to the richness of details, relief and variation of
tones, this series gives each room an effect of
luxury and warmth.



CHIC



15x60




8,8 mm

Chic

SQUARE AFFAIR



GRES PORCELAIN

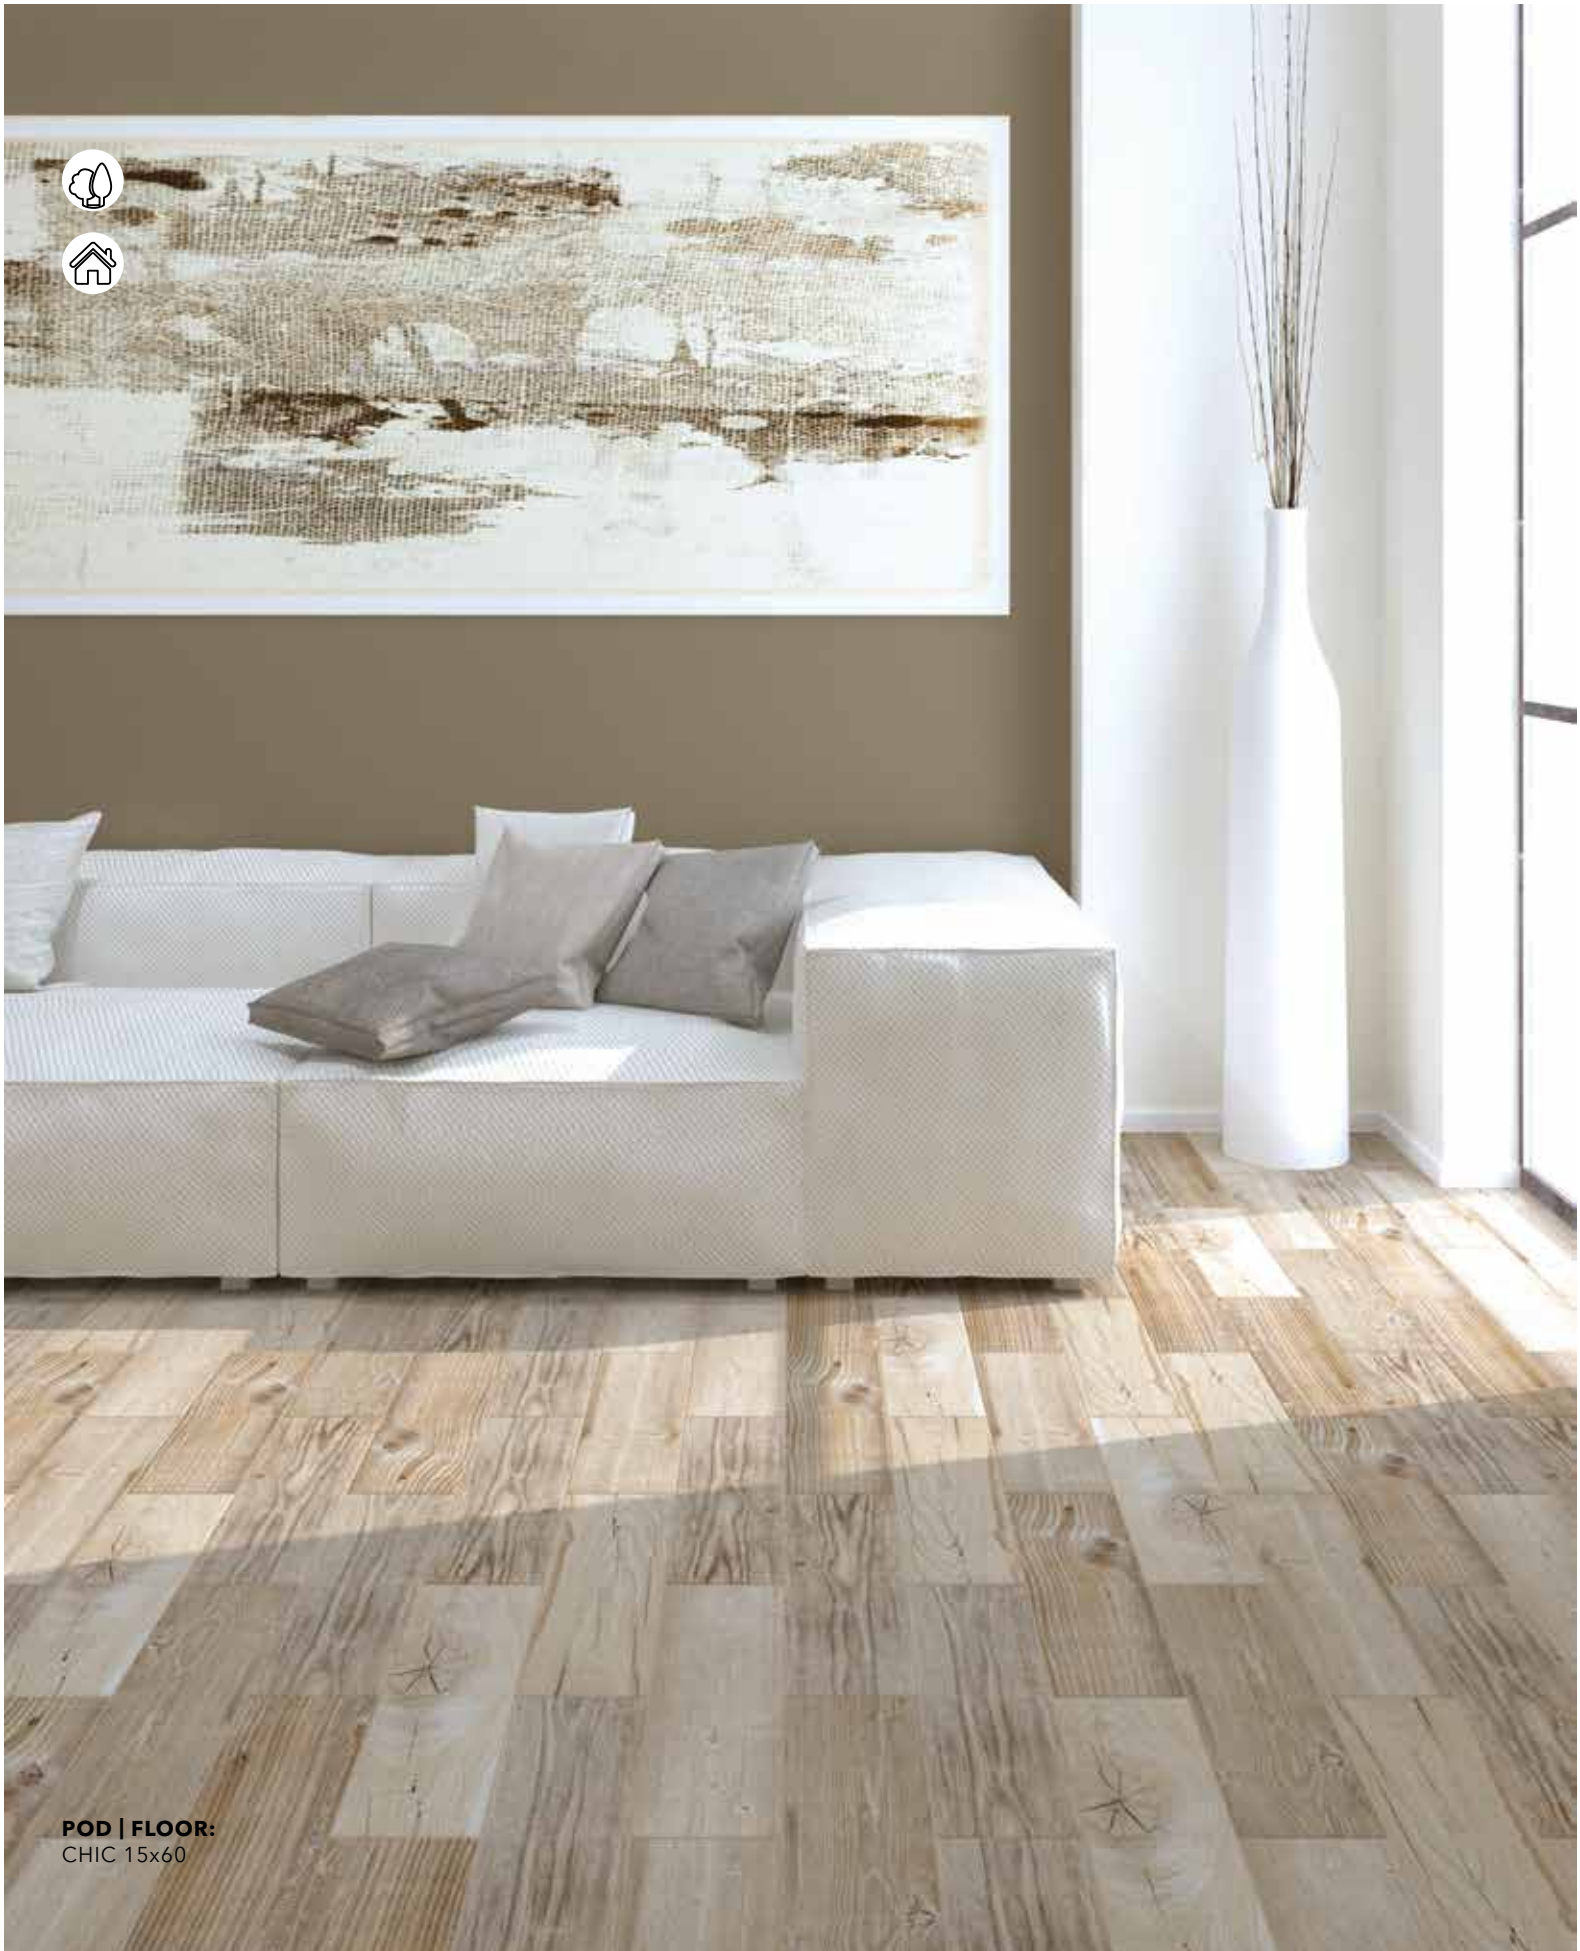

POD | FLOOR:
CHIC 15x60

PEI

4

10




PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREKLAPANJE MAX. 30% DUŽINE OVERLAP MAX. 30% OF LENGHT
							WT WALL TILES / ZIDNE PLOČICE M ²	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
15x60	0,0900	11	0,990	18,81	55,440	1080,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

Seriya Domus je jedna od najstarijih reprodukcija drveta u asortimanu Square Affair. Rustično, pohabano drvo sa neverovatno realnim detaljima čini je omiljenom među podnim pločicama.

Četiri boje u okviru ove serije omogućavaju kombinovanje uz različite stilove, bilo da ste ljubitelj minimalizma, boho chic-a ili rustike.

The Domus series is one of the oldest wood reproductions in the Square Affair range. Rustic, worn wood with incredibly realistic details makes it a favorite among floor tiles. The four colors within this series allow you to combine with different styles, whether you are a fan of minimalism, boho chic or rustic.




ANTICO



NOCE



RUSTICO



45x45



8,2 mm

Domus

SQUARE AFFAIR



GRES PORCELAIN



POD | FLOOR:
DOMUS RUSTICO 45x45



DIN 51097 DIN 51130



PEI 4
2

DOMUS ANTICO 45X45 cm / FT



PEI 4
2

DOMUS NOCE 45X45 cm / FT



PEI 4
5

DOMUS RUSTICO 45X45 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Još jedna imitacija kamena i zemljani tonovi čine seriju Land. Tople nijanse idealne su za postizanje efekta mediteranskog stila opremanja.


Another imitation of stone and earth tones make up the Land series. Warm shades are ideal for achieving the effect of a Mediterranean style of furnishing.



GREY



BEIGE



33x33



7,3 mm

Land

SQUARE AFFAIR



GRES PORCELAIN



POD | FLOOR: LAND BEIGE 33x33



PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Via Strada Via Rotonda

SQUARE AFFAIR




GRES PORCELAIN

Via Strada i Via Rotonda su pločice sa savršeno prenetim detaljima mozaika od kamena. Bogatstvo detalja i reljefa zaslužno je za veoma realističan izgled dekora. Ove dve serije odlično se uklapaju uz rustični stil, pa tako ne čudi što su upravo one prvi izbor kupaca za opremanje vikendica i planinskih kuća.


Via Strada and Via Rotonda are tiles with a perfectly transferred details of stone mosaics. The richness of details and relief is responsible for the very realistic look of the decor. These two series fit perfectly with the rustic style, so it is not surprising that they are the first choice of buyers for furnishing cottages and mountain houses.



BEIGE




GRIGIO



33x33



7,3 mm

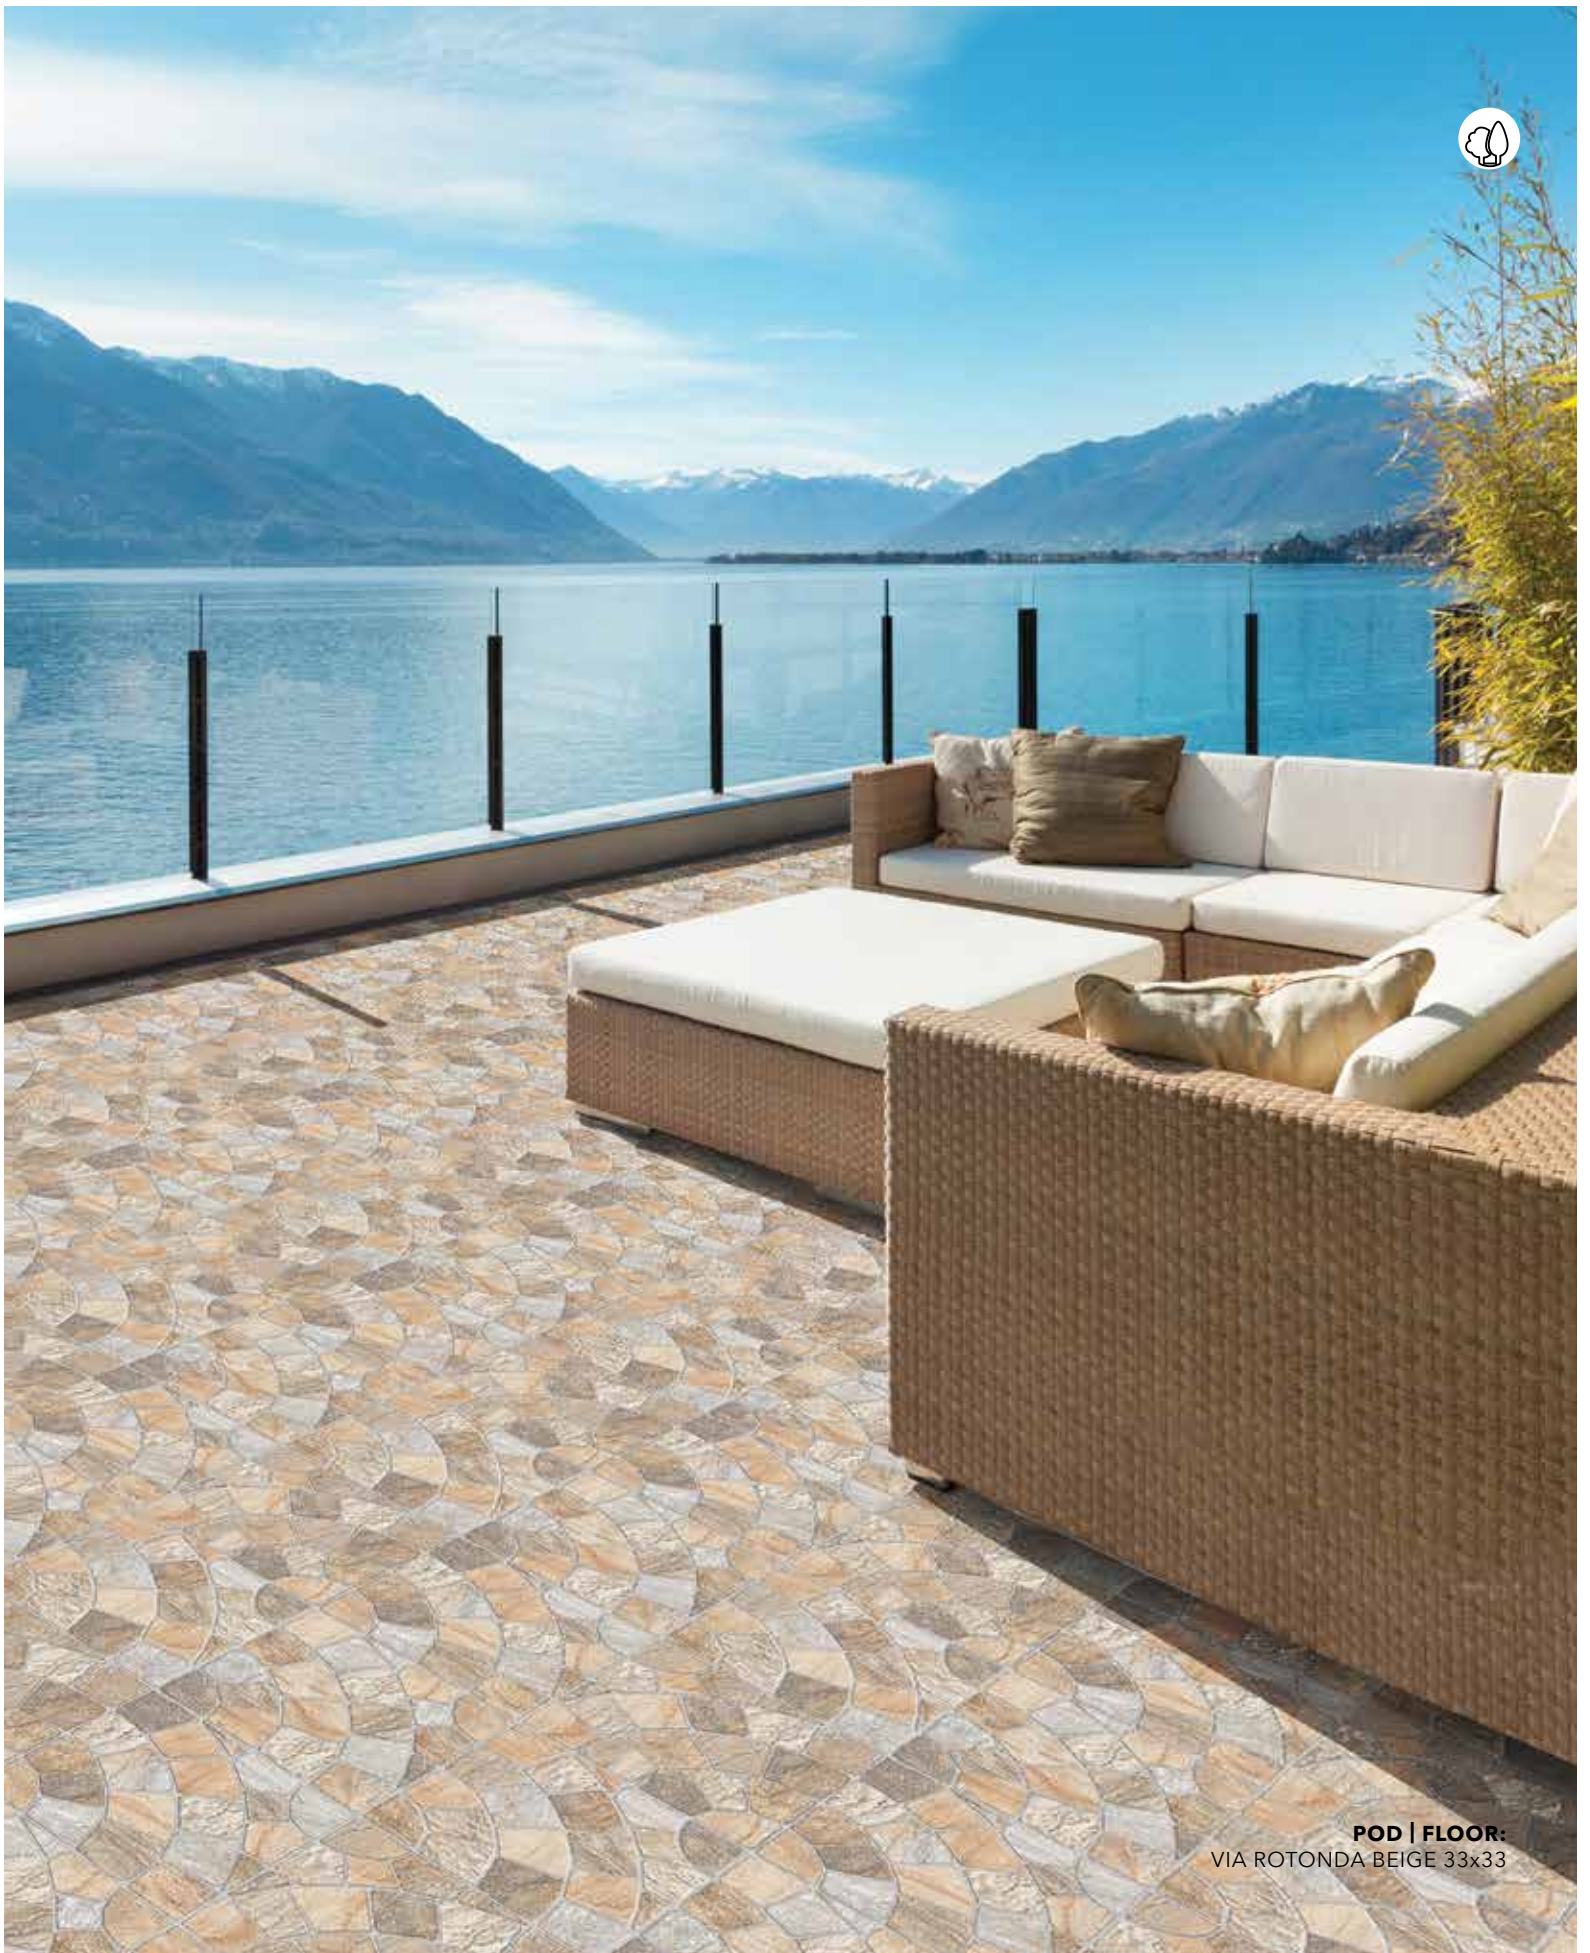

POD | FLOOR:
VIA ROTONDA BEIGE 33x33



DIN 51097 DIN 51130



VIA STRADA BEIGE 33x33 cm / FT



VIA ROTONDA BEIGE 33x33 cm / FT



VIA STRADA GRIGIO 33x33 cm / FT



VIA ROTONDA GRIGIO 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

Congo

SQUARE AFFAIR



GRES PORCELAIN

Ovu šarenoliku seriju odlikuju kamenčići u različitim bojama, kao i reljef koji doprinosi realističnosti dekora. Savršena je za baštenske stazice, balkone i terase.


This colorful series is characterized by little stones in different colors, as well as a relief that contributes to the realism of the decor. It is perfect for garden paths, balconies and terraces.



MARRONE




NERO



33x33




7,3 mm

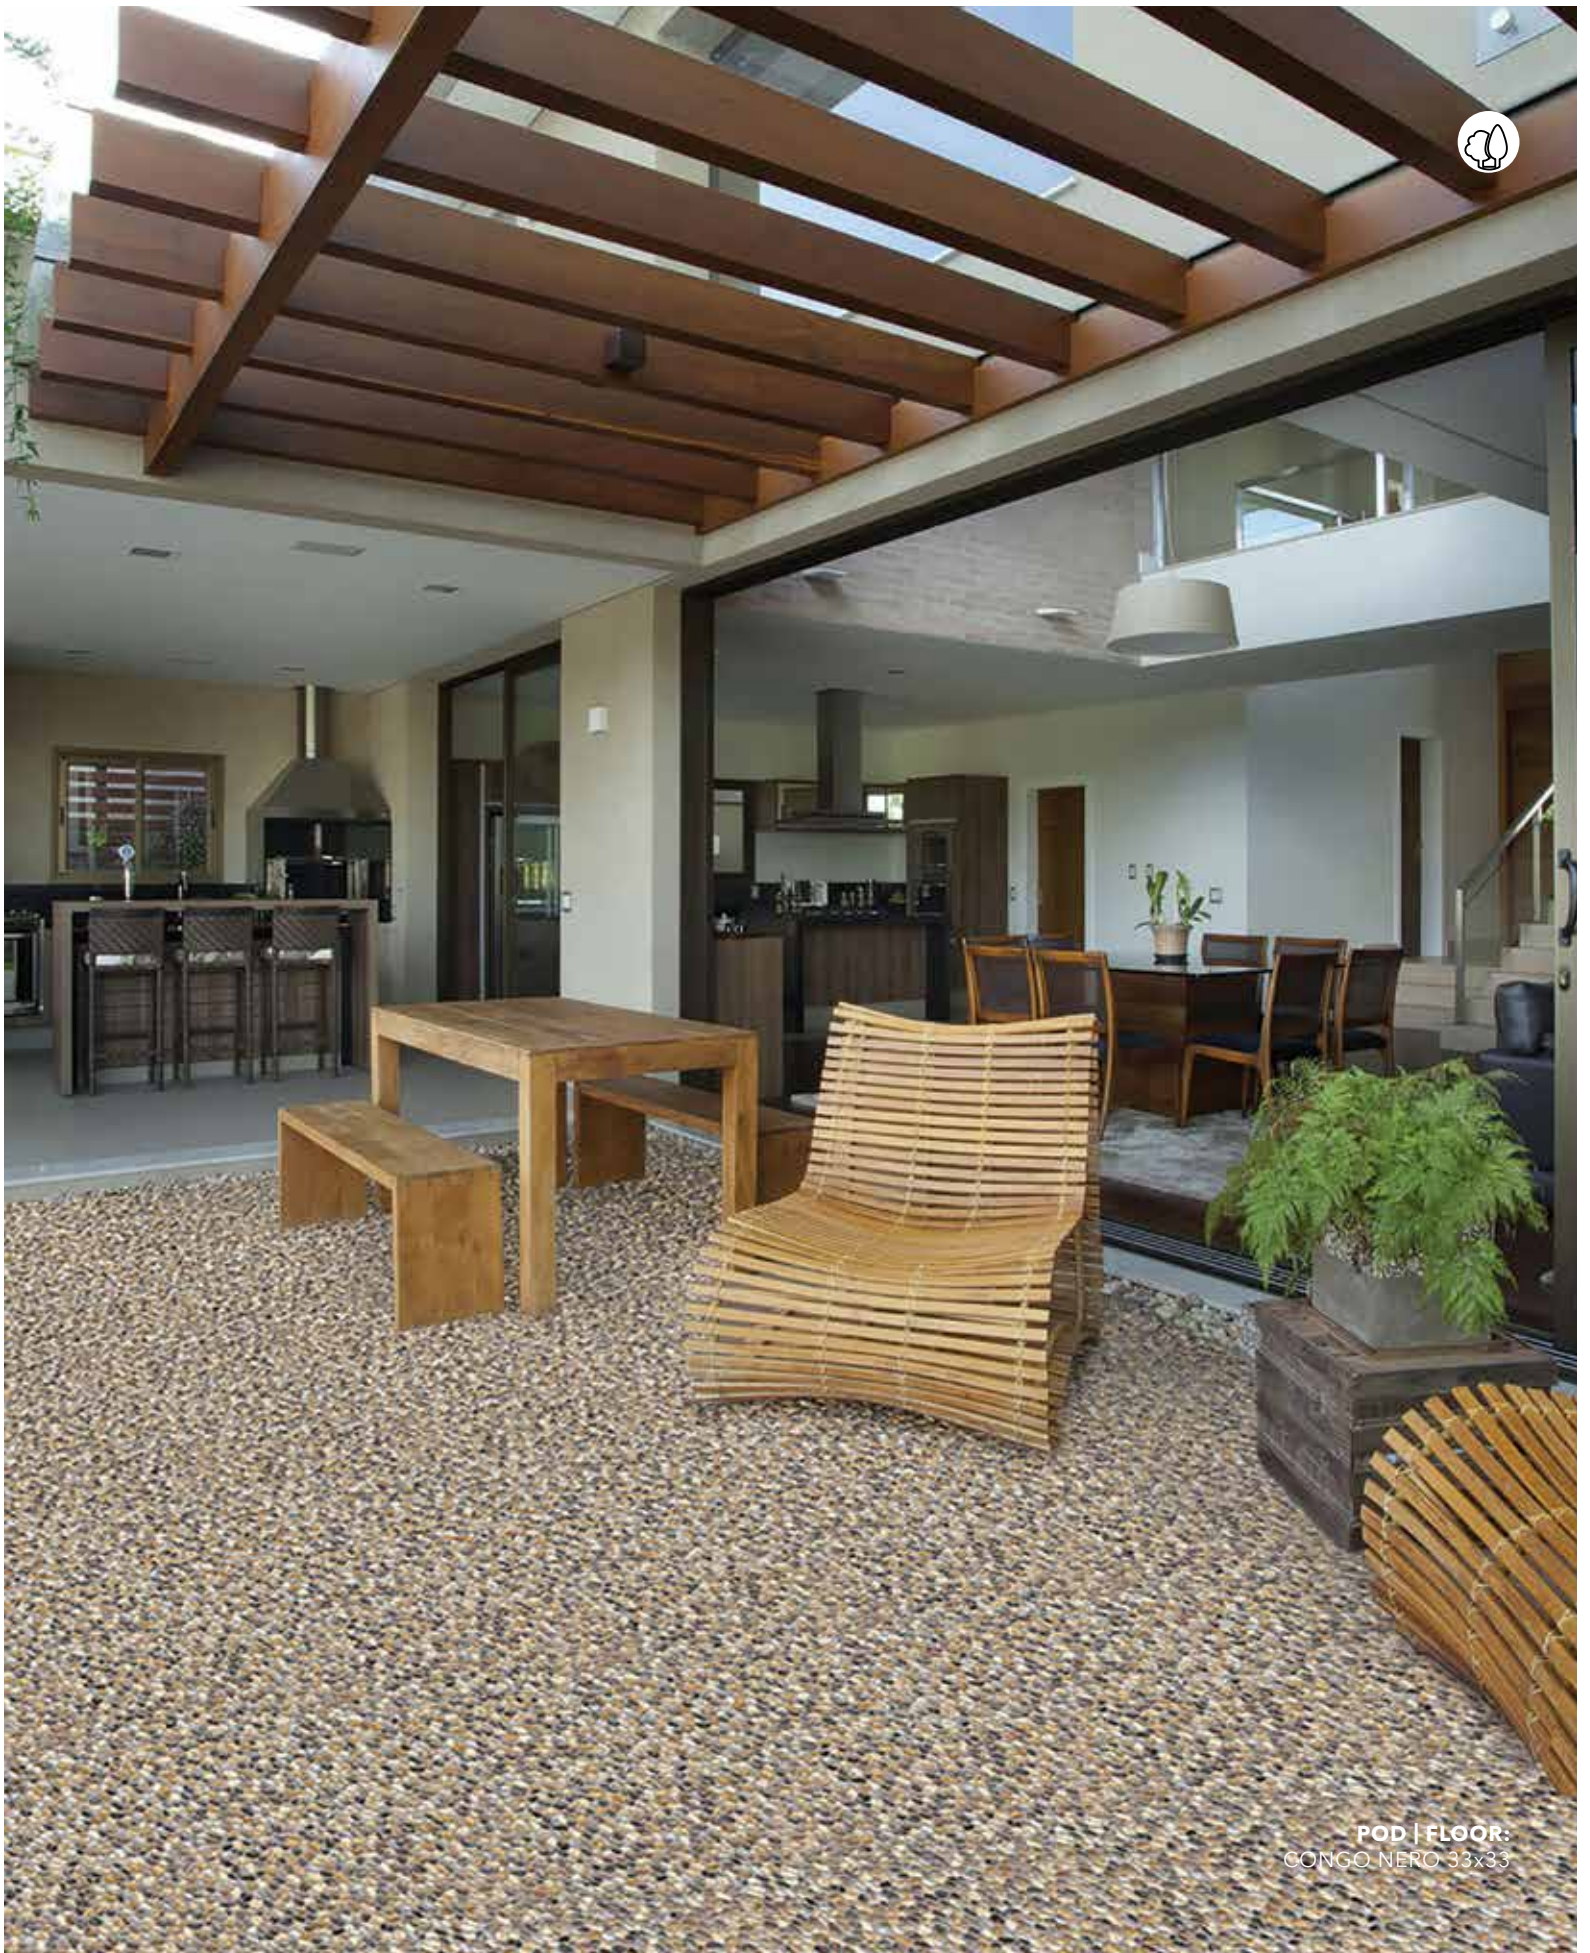


POD | FLOOR:
CONGO NERO 33x33



DIN 51097 DIN 51130

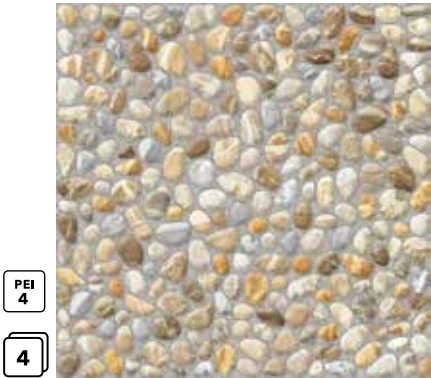

CONGO MARRONE 33x33 cm / FT

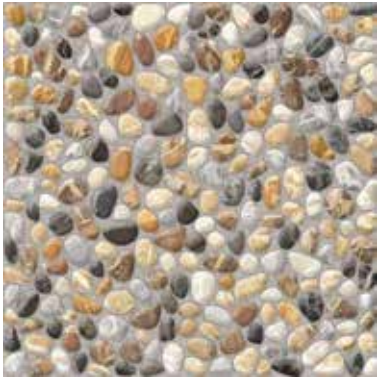

CONGO NERO 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Castello


SQUARE AFFAIR



GRES PORCELAIN

Reprodukcija mozaika od lomljenog kamena, pažljiv odabir nijansi i detalja čini ovu seriju favoritom za popločavanje stepeništa, staza i prilaza. Kako i samo ime kaže, bogat dekor serije Castello doprinosi postizanju efekta nekih starijih, antičkih vremena, pa je zbog toga pločica koja odoleva promeni trendova i ostaje klasika dugi niz godina.

Reproduction of crushed stone mosaics, careful selection of shades and details make this series a favorite for paving stairs, paths and approaches. As the name suggests, the rich decor of the Castello series contributes to the effect of some older, ancient times, which is why the tile is resistant to changing trends and remains a classic for many years.



CASTELLO



33x33



7,3 mm



POD | FLOOR: CASTELLO 33x33



PEI


4

4

CASTELLO 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

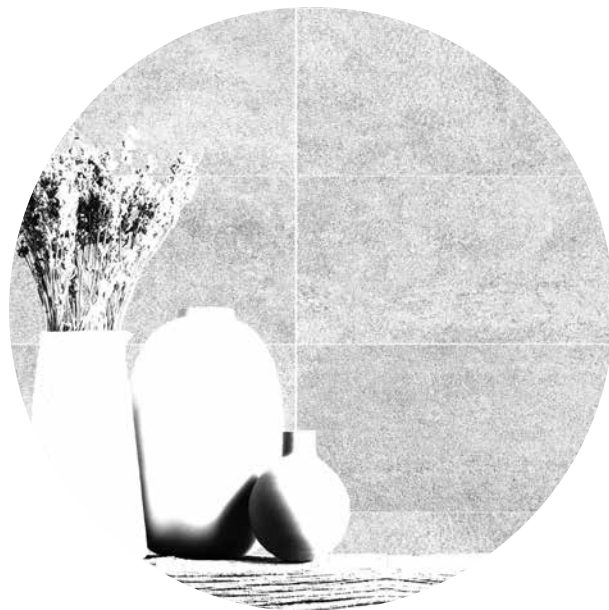

Zidne Pločice Wall Tiles

SQUARE AFFAIR

MARMO BIANCO 82, BRECCIA SARDA 88, EAGLE 94, IMPERIAL 102, GLAM 108, SNOW 114, LUXOR 118, BOTTICINO 122, SMART 126, JOY 132, ELEGANT 136, KASHMIR 142, MERCURY 146, KINGSTONE 150, MARFIL 156, ARCTIC 160, COMFORT 164, CARRARA 168, HABITAT 172, MAIOLICA 178, LIMESTONE 182, FUSION 186, BIANCA 190

Nova zvezda u Square Affair ponudi reprodukcija je serija Marmo. Prelepa grafika mermera sa verno predstavljenim venama i šarama pripada luksuznoj ponudi brenda Square Affair. Idealna je za sve ljubitelje luksuza i vanvremenske lepote koja odoleva promeni trendova. Savršeno se uklapa u bele i elemente u boji svetlog drveta.


The new star in the Square Affair offer of reproductions is the Marmo series. Beautiful marble graphics with faithfully presented veins and patterns belong to the luxury offer of the Square Affair brand. It is ideal for all lovers of luxury and timeless beauty that resists changing trends. It fits perfectly in white and light wood color elements.



MARMO BIANCO



25x75



59x59
RETT



9,2 mm



9,0 mm

Marmo Bianco

SQUARE AFFAIR



NOVO
NEW






POD | FLOOR:
MARMO BIANCO 59x59 RETT



NOVO
NEW

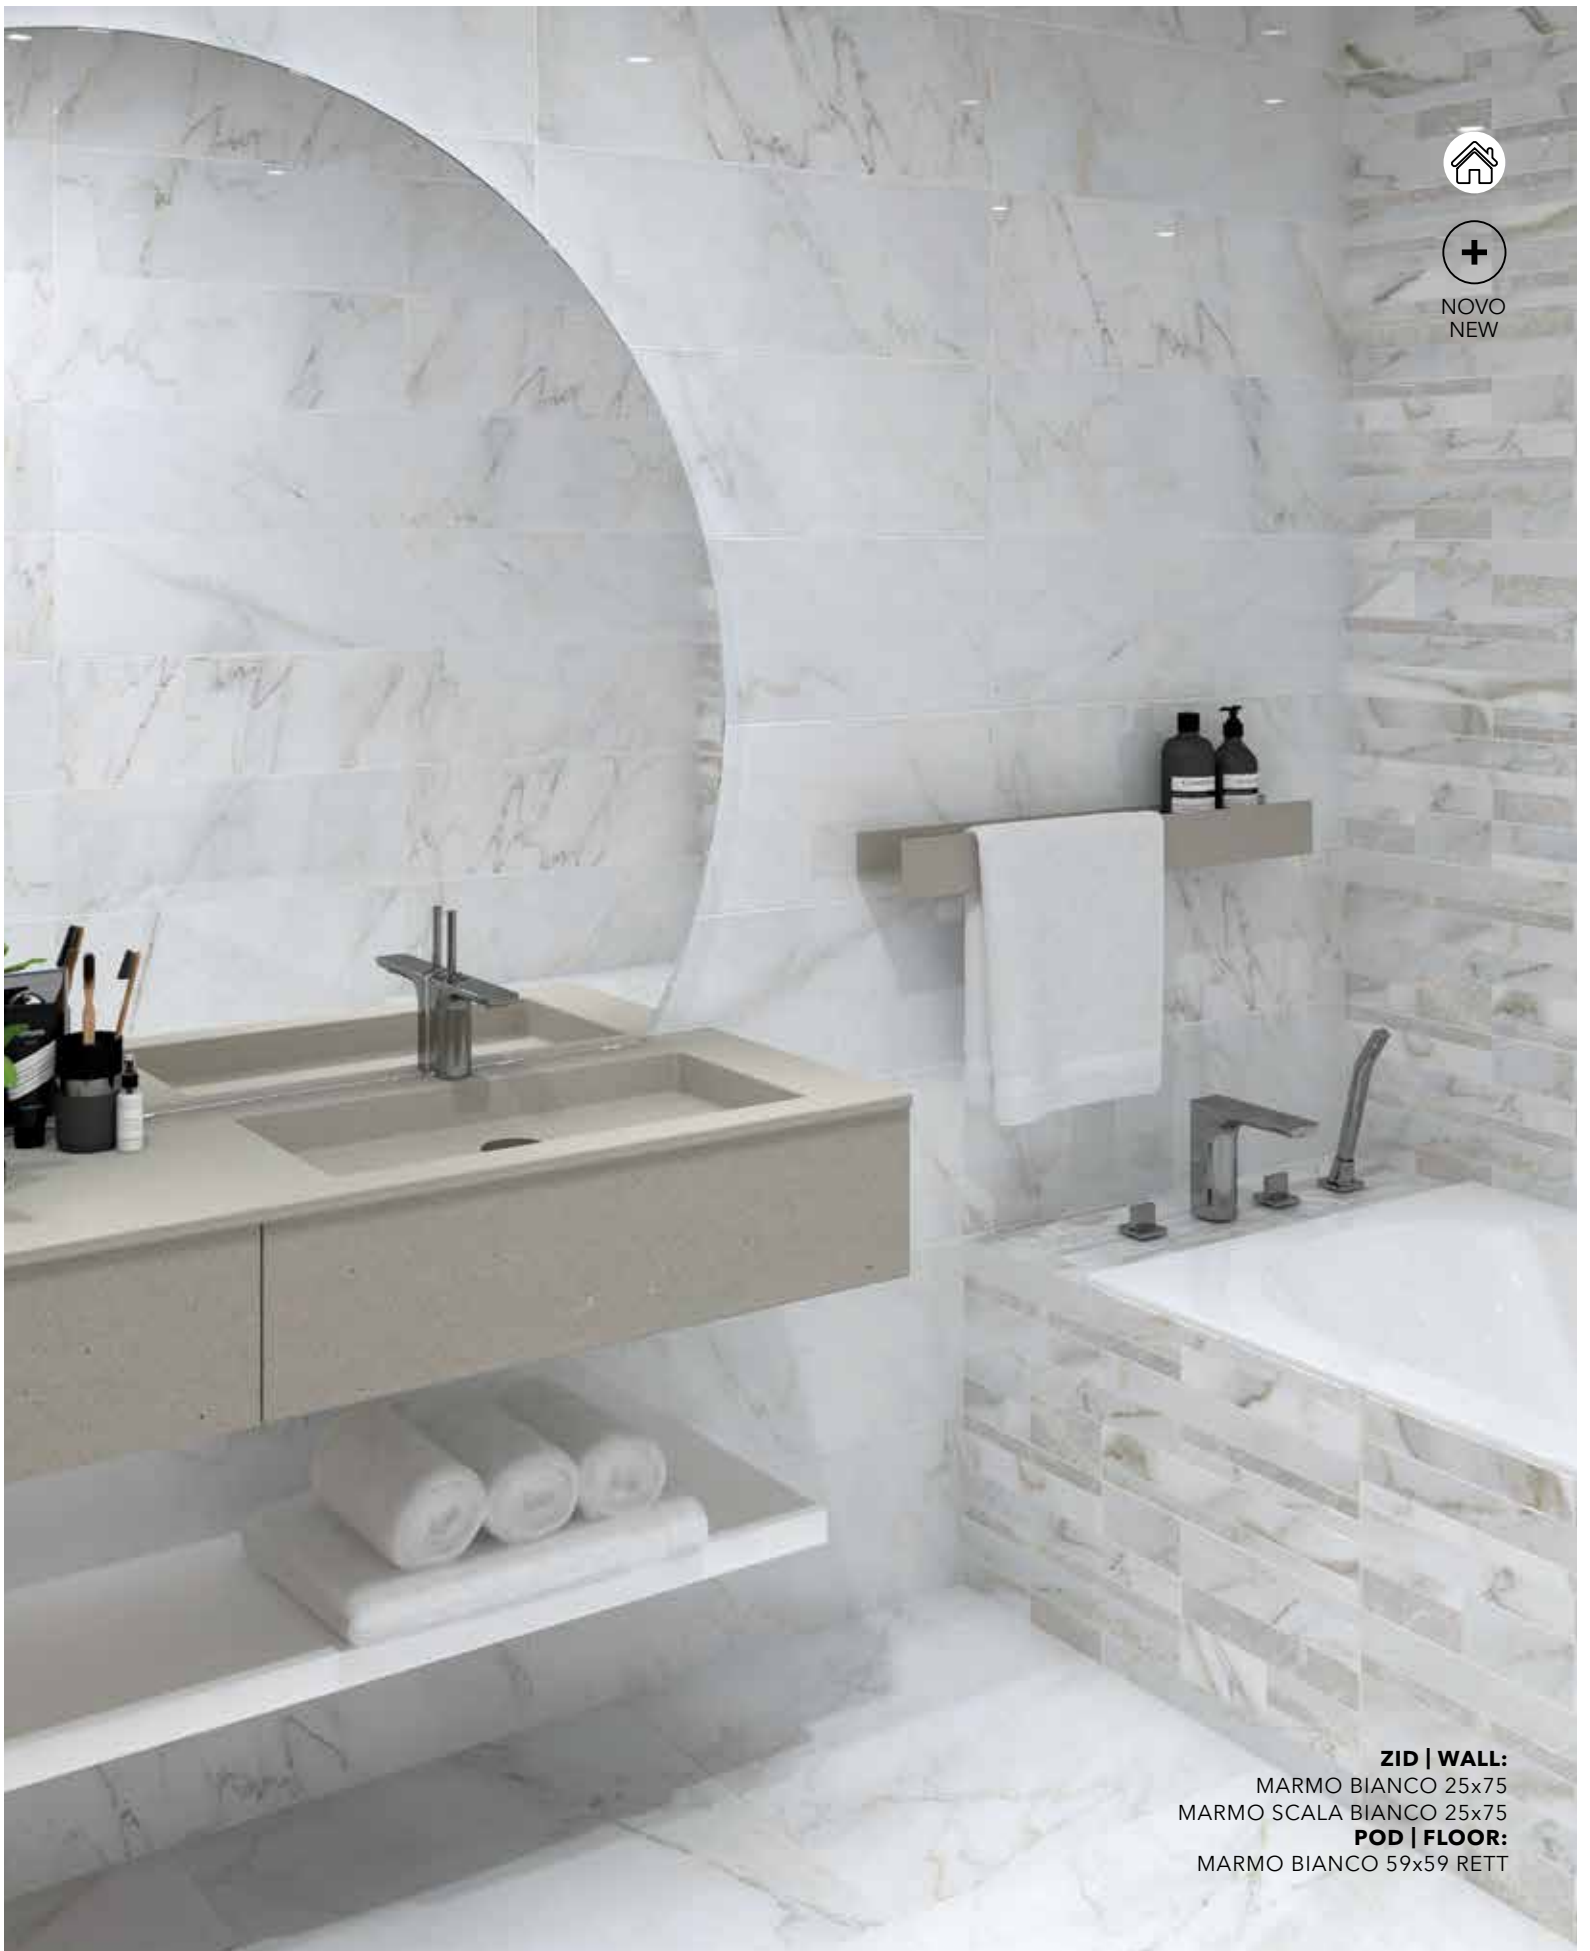

ZID | WALL:
MARMO BIANCO 25x75
MARMO SCALA BIANCO 25x75
POD | FLOOR:
MARMO BIANCO 59x59 RETT

10



MARMO BIANCO 25x75 cm / WT

6



MARMO SCALA BIANCO 25x75 cm / WT

6



MARMO MOSAIC 3D BIANCO 25x75 cm / WT

MARMO BIANCO 59x59 cm **RETT** / FT


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ² FT FLOOR TILES / PODNE PLOČICE M ²	
25x75	0,1875	7	1,312	20,37	62,976	1005,00	LI LISTELA KOM / PC	
DECOR 25x75	0,1875	7	1,312	20,37	41,984	670,00	IN INSERT KOM / PC	
59x59	0,3481	4	1,392	25,20	41,760	780,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Savršena i veoma realistična reprodukcija kamena koji vodi poreklo sa Sardinije prenela je svu lepotu detalja i bogatstvo šara na našu novu seriju Breccia. Osim osnovnog dekora, ova serija obogaćena je i floralnom grafikom čineći je idealnim izborom za sve ljubitelje vanvremenske raskoši i luksuza.

The perfect and very realistic reproduction of the stone originating from Sardinia transferred all the beauty of the details and the richness of the patterns to our new Breccia series. In addition to the basic decor, this series is enriched with floral graphics, making it an ideal choice for all lovers of timeless luxury.




BRECCIA SARDA



25x75



45x45



59x59
RETT



9,2 mm



8,2 mm



9,0 mm

Breccia Sarda

SQUARE AFFAIR





ZID | WALL:
BRECCIA SARDA 25x75
BRECCIA SARDA MOVE 3D 25x75
POD | FLOOR:
BRECCIA SARDA 59x59 RETT



ZID | WALL:
BRECCIA SARDA 25x75
BRECCIA SARDA MOSAIC 3D 25x75
POD | FLOOR:
BRECCIA SARDA 45x45



12

BRECCIA SARDA 25x75 cm / WT



12

BRECCIA SARDA GARDEN 25x75 cm / WT



12

BRECCIA SARDA MOVE 3D 25x75 cm / WT



6

BRECCIA SARDA MOSAIC 3D 25x75 cm / WT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
								
25x75	0,1875	7	1,312	20,37	62,976	1005,00	WT WALL TILES / ZIDNE PLOČICE M ²	
DECOR 25x75	0,1875	7	1,312	20,37	41,984	670,00	FT FLOOR TILES / PODNE PLOČICE M ²	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	LI LISTELA KOM / PC	
59x59	0,3481	4	1,392	25,20	41,760	780,00	IN INSERT KOM / PC	
							RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

BRECCIA SARDA



DIN 51097 DIN 51130



PEI
4

8

BRECCIA SARDA 45x45 cm / FT

BRECCIA SARDA



DIN 51097 DIN 51130



PEI
4

5

BRECCIA SARDA 59x59 cm **RETT** / FT

Moderno, jednostavno i raskošno sinonimi su za našu novu seriju Eagle. Precizno preneti detalji cementa, odabir raskošnih boja i dekori geometrijskih šara čine ovu seriju apsolutnom zvezdom noviteta. Pravi je izbor za moderno uređene prostore i ljubitelje jednostavnosti i elegancije.

Modern, simple and luxurious are synonymous for our new Eagle series. Precisely conveyed cement details, a choice of gorgeous colors and decors of geometric patterns make this series an absolute star of novelties. It is the right choice for modern spaces and lovers of simplicity and elegance.



IVORY




CORAL




MUSTARD




BEIGE




FOREST



SMOKE



25x75



45x45



9,2 mm



8,2 mm

Eagle

SQUARE AFFAIR





ZID | WALL:

EAGLE IVORY 25x75
EAGLE FOREST 25x75
EAGLE ZENITH COLOR 25x75

POD | FLOOR:

EAGLE IVORY 45x45



ZID | WALL:
EAGLE IVORY 25x75
EAGLE SMOKE 25x75
EAGLE ZENITH BASIC 25x75
POD | FLOOR:
EAGLE SMOKE 45x45

12



EAGLE IVORY 25x75 cm / WT

12



EAGLE BEIGE 25x75 cm / WT

12



EAGLE SMOKE 25x75 cm / WT

12



EAGLE MOVE 3D IVORY 25x75 cm / WT



12

EAGLE CORAL 25x75 cm / WT



12

EAGLE FOREST 25x75 cm / WT



12


EAGLE MUSTARD 25x75 cm / WT



ZID | WALL:
EAGLE MOVE 3D IVORY 25x75
EAGLE IVORY 25x75

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x75	0,1875	7	1,312	20,37	62,976	1005,00	LI LISTELA KOM / PC	
DECOR 25x75	0,1875	7	1,312	20,37	41,984	670,00	IN INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	




EAGLE ZENITH BASIC 25x75 cm / WT



EAGLE ZENITH COLOR 25x75 cm / WT



DIN 51097 DIN 51130

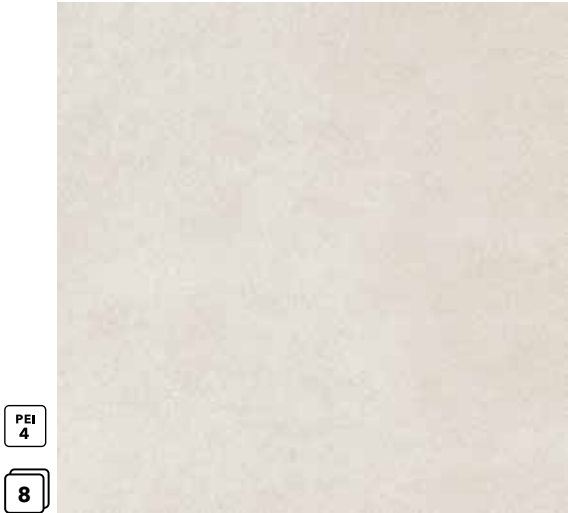

EAGLE IVORY 45x45 cm / FT



EAGLE SMOKE 45x45 cm / FT

Raskošna grafika tamnog mermera odlikuje novu seriju Imperial. Teget boja u kombinaciji sa belim šarama daje prelep kontrast koji doprinosi efektu luksuza. Savršena je za uklapanje sa stilskim elementima nameštaja.


Luxurious dark marble graphics feature the new Imperial series. The navy blue color in combination with the white patterns gives a beautiful contrast that contributes to the effect of luxury. It is perfect for fitting with stylish furniture elements.




LIGHT



BLUE



25x75



45x45



9,2 mm



8,2 mm

Imperial

SQUARE AFFAIR





ZID | WALL:
IMPERIAL LIGHT 25x75
IMPERIAL PRIME 25x75
IMPERIAL BLUE 25x75
POD | FLOOR:
IMPERIAL BLUE 45x45



ZID | WALL:
IMPERIAL LIGHT 25x75
IMPERIAL RAY 25x75
IMPERIAL BLUE 25x75
POD | FLOOR:
IMPERIAL BLUE 45x45

12



IMPERIAL LIGHT 25x75 cm / WT

12



IMPERIAL BLUE 25x75 cm / WT

8



IMPERIAL PRIME 25x75 cm / WT

8



IMPERIAL RAY 25x75 cm / WT



DIN 51097 DIN 51130



IMPERIAL BLUE 45x45 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x75	0,1875	7	1,312	20,37	62,976	1005,00	LI LISTELA KOM / PC	
DECOR 25x75	0,1875	7	1,312	20,37	41,984	670,00	IN INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Zemljani tonovi serije Glam daju dodatnu notu elegancije ovoj imitaciji kamena. Nežne vene i pukotine doprinose realističnosti dekora, zbog čega je ova pločica pravi izbor za ljubitelje luksuza.

The earthy tones of the Glam series give an extra note of elegance to this stone imitation. Gentle veins and cracks contribute to the realism of the decor, which is why this tile is the right choice for luxury lovers.



ICE




GREY



BROWN



25x75



45x45



9,2 mm



8,2 mm

Glam

SQUARE AFFAIR





ZID | WALL:

GLAM ICE 25x75

GLAM CAPPUCCINO 25x75

GLAM ART CAPPUCCINO 25x75

POD | FLOOR:

GLAM CAPPUCCINO 45x45



ZID | WALL:
GLAM ICE 25x75
GLAM MOSAIC 3D ICE 25x75
POD | FLOOR:
GLAM CAPPUCCINO 45x45

12



GLAM ICE 25x75 cm / WT

12



GLAM GREY 25x75 cm / WT


12



GLAM BROWN 25x75 cm / WT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x75	0,1875	7	1,312	20,37	62,976	1005,00	LI LISTELA KOM / PC	
DECOR 25x75	0,1875	7	1,312	20,37	41,984	670,00	IN INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	



6



GLAM MOSAIC 3D ICE 25x75 cm / WT

6



GLAM ART GREY 25x75 cm / WT

6



GLAM ART BROWN 25x75 cm / WT



DIN 51097 DIN 51130

PEI 3

12



GLAM GREY 45x45 cm / FT

PEI 3


12




GLAM BROWN 45x45 cm / FT

Snežno bela pločica, savršena za uklapanje uz svaki stil opremanja enterijera. Serija ima i reljefni dekor imitacije mozaika, koji daje razigranost ovoj jednostavnoj seriji.

Snow white tile, perfect for fitting into any style of interior design. The series also has a relief mosaic imitation decor, which gives playfulness to this simple series.



SNOW



25x75



9,2 mm

Snow


SQUARE AFFAIR





ZID | WALL:
SNOW 25x75
SNOW MOSAIC 3D 25x75
POD | FLOOR:
FEELING NOCE 15X60

1



SNOW 25x75 cm / WT

1



SNOW MOSAIC 3D 25x75 cm / WT



SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:

- CHIC** 15x60 cm - na strani / see page 58

STYLE 15x60 cm - na strani / see page 54

LUXOR 59x59 rett cm - na strani / see page 30
- FEELING** 30x60 cm rett, 15x60 cm - na strani / see page 50

SPACE 29,5x59, 59x59 cm rett - na strani / see page 8

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
25x75	0,1875	7	1,312	20,37	62,976	1005,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	
DECOR 25x75	0,1875	7	1,312	20,37	41,984	670,00		

Mermer kao večita inspiracija za opremanje enterijera. Seriju Luxor čine detalji mermera sa modernim i upadljivim venama. Odličan je izbor za postizanje efekta raskoši i vanvremenske elegancije.


Marble as an eternal inspiration for interior design. The Luxor series consists of a details of marble with modern and striking veins. It is an excellent choice for achieving the effect of luxury and timeless elegance.



WHITE



BLACK



25x75



9,2 mm

Luxor

SQUARE AFFAIR






ZID | WALL:
LUXOR WHITE 25x75
LUXOR MOSAIC 3D WHITE 25x75
POD | FLOOR:
LUXOR 59x59 RETT LUXOR 59x59 RETT

8



LUXOR WHITE 25x75 cm / WT

10

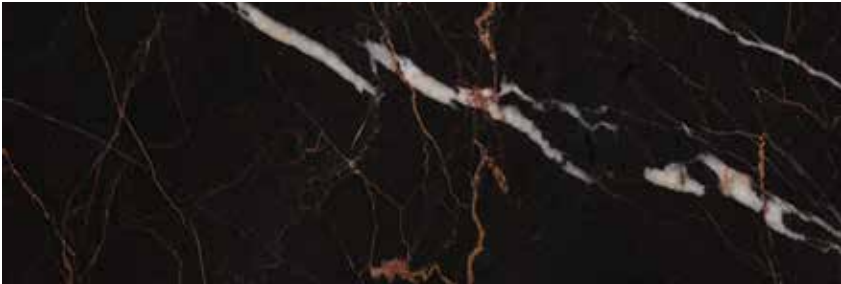

LUXOR BLACK 25x75 cm / WT

6



LUXOR MOSAIC 3D WHITE 25x75 cm / WT



SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:

LUXOR 59x59 cm rett - na strani / see page 30

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION		PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT	WALL TILES / ZIDNE PLOČICE M ²	
							FT	FLOOR TILES / PODNE PLOČICE M ²	
							LI	LISTELA KOM / PC	
25x75	0,1875	7	1,312	20,37	62,976	1005,00	IN	INSERT KOM / PC	
DECOR 25x75	0,1875	7	1,312	20,37	41,984	670,00	RETT	REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Seriya zidnih pločica Botticino predstavlja imitaciju raskošnog kamena. Bogati dekori sa mnoštvom detalja čine ovu seriju idealnim izborom za sve koji vole efekat luksuza i klasike.


The Botticino series of wall tiles is a imitation of luxurious stone. Rich decors with many details make this series an ideal choice for everyone who loves the effect of luxury and classics.



BOTTICINO



20x60



45x45



9,0 mm



8,2 mm

Botticino

SQUARE AFFAIR





ZID | WALL:
BOTTICINO 20x60
BOTTICINO DIAMONDS 20x60
POD | FLOOR:
BOTTICINO 45x45



12



BOTTICINO 20x60 cm / WT



12

BOTTICINO DIAMONDS 20x60 cm / WT

12



BOTTICINO PETALS 3D 20x60 cm / WT



DIN 51097 DIN 51130

PEI 4

7



BOTTICINO 45x45 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
20x60	0,1200	13	1,560	23,01	68,640	1040,00	LI LISTELA KOM / PC	
DECOR 20x60	0,1200	13	1,560	23,01	51,480	780,00	IN INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Elegancija i nežnost sinonim su za seriju zidnih pločica Smart. Osnovni dekor betona daje joj dozu jednostavnosti, dok pažljivo odabrane nežne boje i dekori omogućavaju da postignete efekat topline u vašem kupatilu.

Elegance and tenderness are synonymous for Smart wall tile series. The basic decor of concrete gives it a dose of simplicity, while carefully selected gentle colors and decors allow you to achieve the effect of warmth in your bathroom.



CREMA




BLUE



SAND



POWDER



20x60



45x45



9,0 mm



8,2 mm

Smart

SQUARE AFFAIR





ZID | WALL:
SMART CREMA 20x60
SMART POWDER 20x60
SMART DECO POWDER 20x60
POD | FLOOR:
SMART CREMA 45x45






ZID | WALL:
SMART BLUE 20x60
SMART DECO BLUE 20x60

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
20x60	0,1200	13	1,560	23,01	68,640	1040,00	LI LISTELA KOM / PC	
DECOR 20x60	0,1200	13	1,560	23,01	51,480	780,00	IN 32INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



18



SMART CREMA 20x60 cm / WT



18

SMART POWDER 20x60 cm / WT

18



SMART BLUE 20x60 cm / WT



8

SMART DECO BLUE 20x60 cm / WT

18



SMART SAND 20x60 cm / WT



8

SMART DECO POWDER 20x60 cm / WT



DIN 51097 DIN 51130

PEI 4


12



SMART CREMA 45x45 cm / FT

Luksuzna serija iz Square Affair ponude je i serija Joy. Odlikuju je jasne, pune boje i visok sjaj glazure. Odličan je izbor za sve koji prate trendove, a njena lepota je u tome što se savršeno uklapa uz podne pločice sa imitacijom drveta dajući na taj način prostoru šik i moderan izgled.

The luxury series from the Square Affair offer is also the Joy series. It is characterized by clear, full colors and high gloss glaze. It is a great choice for all those who follow trends, and its beauty is that it fits perfectly with floor tiles with wood imitation, thus giving the space a chic and modern look.



WHITE




BEIGE




GREY



MINT



SKY BLUE




20x60




9,0 mm

Joy

SQUARE AFFAIR

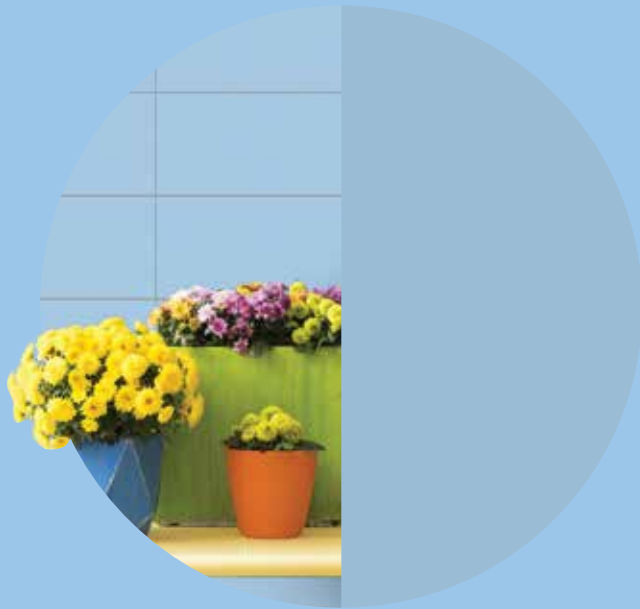

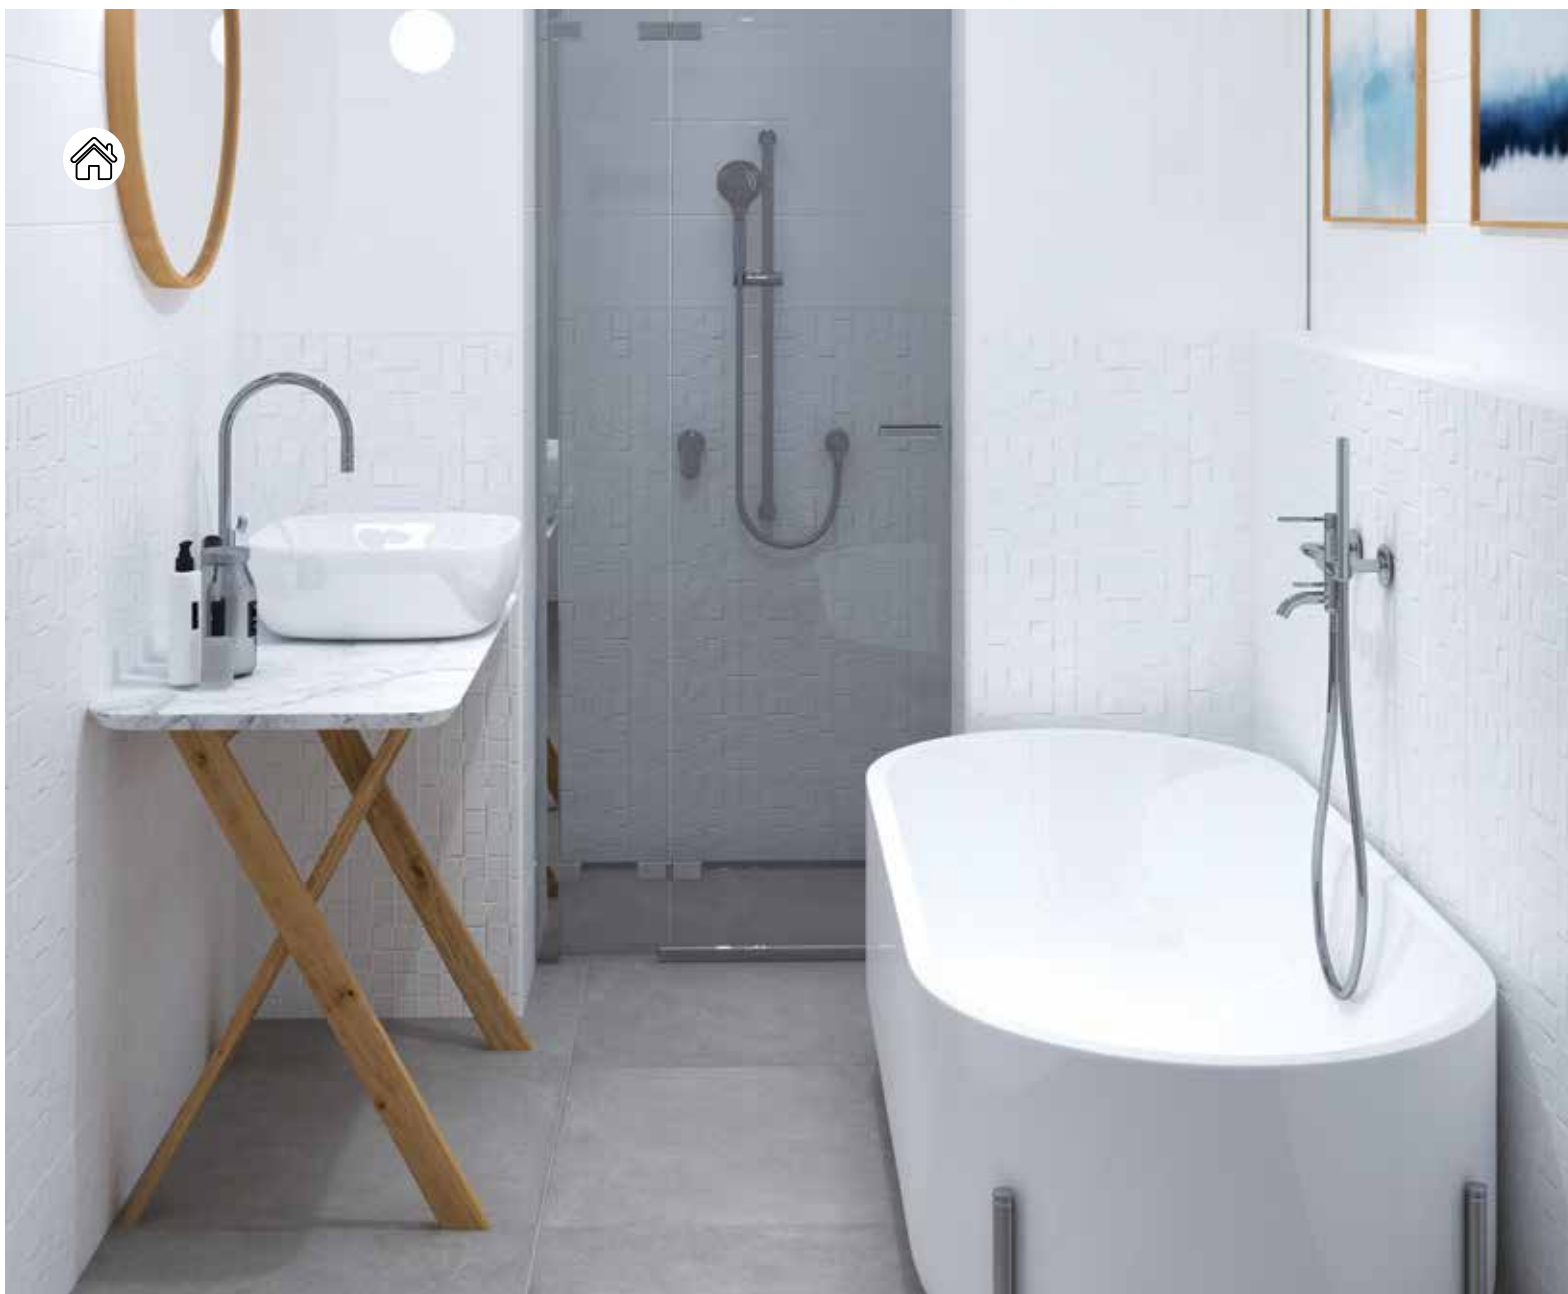

ZID | WALL:

JOY WHITE 20x60

JOY MOSAIC 3D WHITE 20x60

POD | FLOOR:

SPACE TITAN 59x59 RETT



SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:

CHIC 15x60 cm - na strani / see page 58


FEELING 30x60 cm rett, 15x60 cm - na strani / see page 50

SPACE 29,5x59, 59x59 cm rett - na strani / see page 8

LUXOR 59x59 cm rett - na strani / see page 30

STYLE 15x60 cm - na strani / see page 54

1



JOY WHITE 20x60 cm / WT

1



JOY BEIGE 20x60 cm / WT

1



JOY GREY 20x60 cm / WT

1



JOY SKY BLUE 20x60 cm / WT

1



JOY MINT 20x60 cm / WT

1



JOY MOSAIC 3D WHITE 20x60 cm / WT

1



JOY PETALS 3D WHITE 20x60 cm / WT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION		PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT	WALL TILES / ZIDNE PLOČICE M ²	
							FT	FLOOR TILES / PODNE PLOČICE M ²	
							LI	LISTELA KOM / PC	
							IN	INSERT KOM / PC	
20x60	0,1200	13	1,560	23,01	68,640	1040,00	RETT	REKTIKOVANA PLOČICA / RECTIFIED TILE	
DECOR 20x60	0,1200	13	1,560	23,01	51,480	780,00			

Zemljani tonovi u kombinaciji sa detaljima mermera specifični su za seriju Elegant. I ako je u pitanju imitacija vrste kamena, upravo pažljiv odabir boja i dekora omogućava da upotrebom ove serije postignete efekat topline.

Earth tones combined with marble details are specific to the Elegant series. Although it is the imitation of stone, the careful selection of colors and decor allows you to achieve the effect of warmth by using this series.



CREMA




GREY




MOCHA



LIGHT GREY



20x60



45x45



9,0mm



8,2 mm

Elegant

SQUARE AFFAIR





ZID | WALL:

ELEGANT LIGHT GREY 20x60

ELEGANT GREY 20x60

ELEGANT MOSAIC 3D GREY 20X60

POD | FLOOR:

ELEGANT GREY 45x45







ZID | WALL:
ELEGANT CREMA 20x60
ELEGANT MOSAIC 3D CREMA 20X60
POD | FLOOR:
ELEGANT CREMA 45x45

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
20x60	0,1200	13	1,560	23,01	68,640	1040,00	LI LISTELA KOM / PC	
DECOR 20x60	0,1200	13	1,560	23,01	51,480	780,00	IN INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	



12

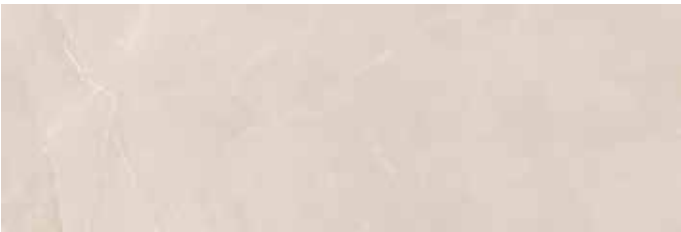

ELEGANT CREMA 20x60 cm / WT



12

ELEGANT MOCHA 20x60 cm / WT

12



ELEGANT LIGHT GREY 20x60 cm / WT




12

ELEGANT GREY 20x60 cm / WT

4



ELEGANT MOSAIC 3D CREMA 20x60 cm / WT

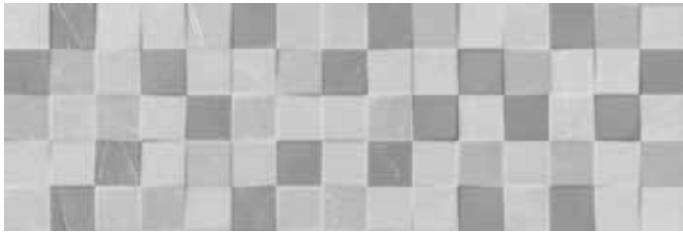

4

ELEGANT MOSAIC 3D GREY 20x60 cm / WT



DIN 51097 DIN 51130

PEI 4

12



ELEGANT CREMA 45x45 cm / FT

PEI 3

12



ELEGANT GREY 45x45 cm / FT

Ovu seriju odlikuju dve nežne nijanse bež i sive boje. Uz jednostavnost boja, bogati detalji mermera daju dozu elegancije zbog čega je ova serija odličan izbor za projekte i poslovne prostore.

This series is characterized by two gentle shades of beige and gray. With the simplicity of colors, rich details of marble give a dose of elegance, which is why this series is a great choice for projects and business premises.




GOLD



SILVER



25x50



33x33



8,8 mm




7,3 mm


Kashmir

SQUARE AFFAIR



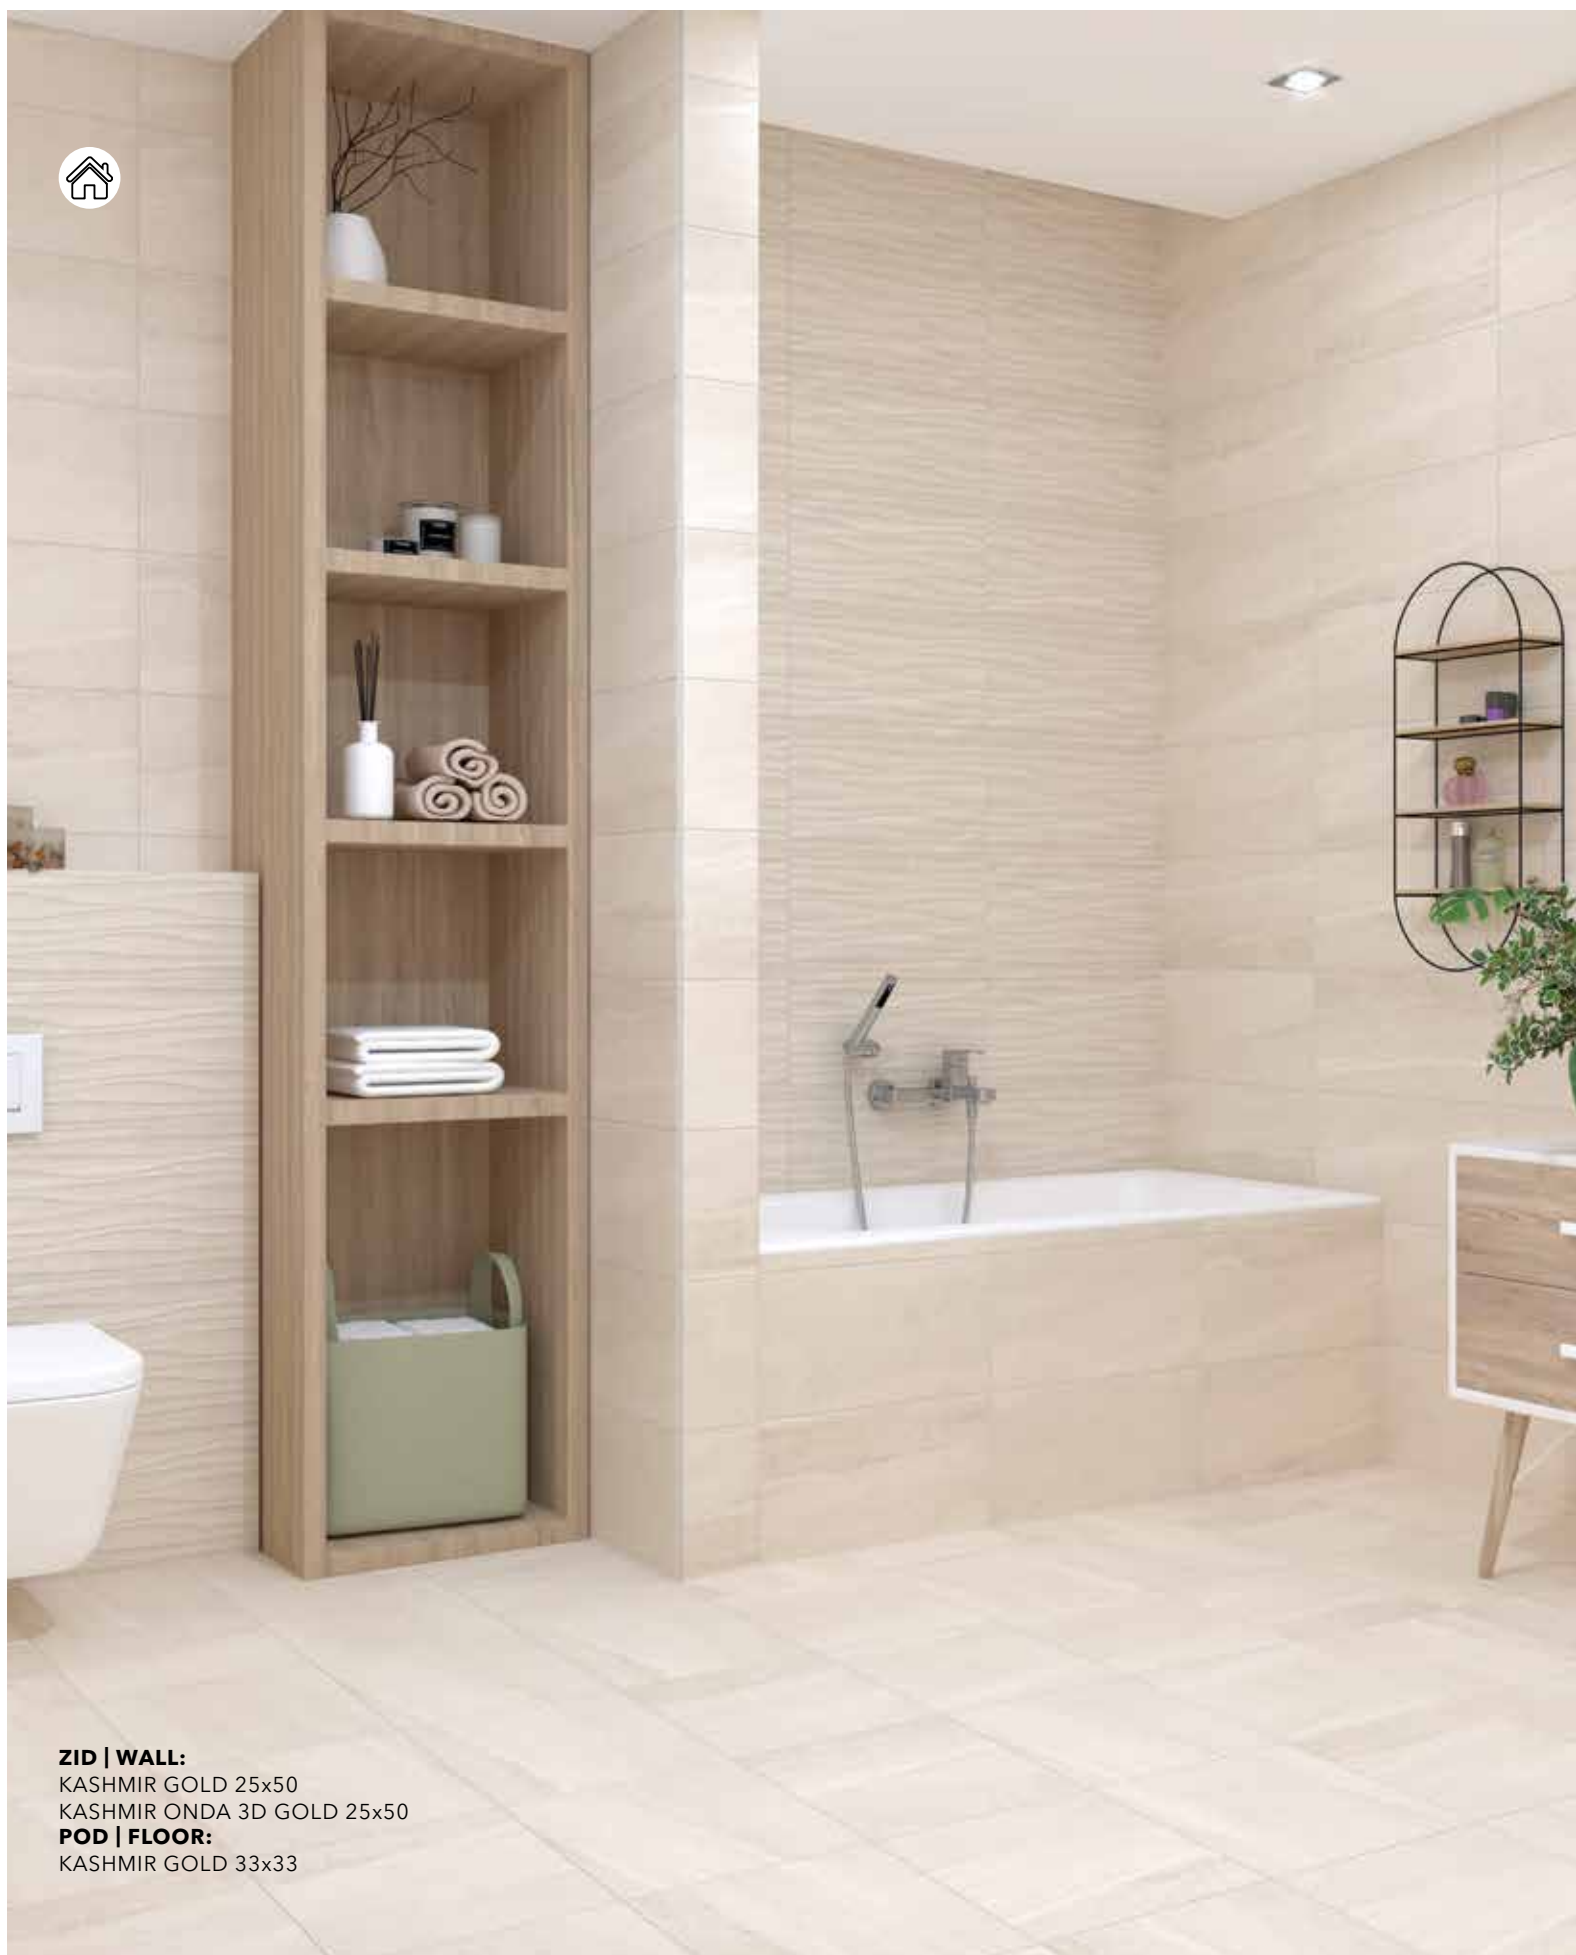

ZID | WALL:
KASHMIR GOLD 25x50
KASHMIR ONDA 3D GOLD 25x50
POD | FLOOR:
KASHMIR GOLD 33x33



12



KASHMIR GOLD 25x50 cm / WT

12



KASHMIR SILVER 25x50 cm / WT

12



KASHMIR ONDA 3D GOLD 25x50 cm / WT

12



KASHMIR ONDA 3D SILVER 25x50 cm / WT



DIN 51097 DIN 51130

PEI 4

12



KASHMIR GOLD 33x33 cm / FT

PEI 4

12




KASHMIR SILVER 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Savršena imitacija betona čini seriju Mercury. Tri osnovne boje kao i raskošan dekor pačvorka omogućava savršen spoj sa potpuno različitim stilovima opremanja enterijera - od rustike, preko minimalizma do industrijskog dizajna.

The perfect imitation of concrete makes the Mercury series. The three basic colors as well as the sumptuous decor of the patchwork allows a perfect blend of this series with completely different styles of interior design - from rustic, through minimalism to industrial design.




ICE




GREY



BEIGE



25x50



33x33



8,8 mm



7,3 mm


Mercury

SQUARE AFFAIR





ZID | WALL:
MERCURY ICE 25x50
MERCURY CRAFT 25x50
POD | FLOOR:
MERCURY ICE 33x33



12



MERCURY ICE 25x50 cm / WT

12



MERCURY GREY 25x50 cm / WT

12



MERCURY BEIGE 25x50 cm / WT

6



MERCURY CRAFT 25x50 cm / WT



DIN 51097 DIN 51130

PEI 4

12



MERCURY ICE 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Raskošna serija zidnih pločica sa dekorom kamena. Realno reprodukovani detalji, vene i boje daju ovoj seriji luksuzan izgled.

Luxurious series of wall tiles with stone decor.
Realistically reproduced details, veins and colors give this series a luxurious look.



ICE




GREY



BROWN



25x50



45x45



8,8 mm




8,2 mm


Kingstone

SQUARE AFFAIR



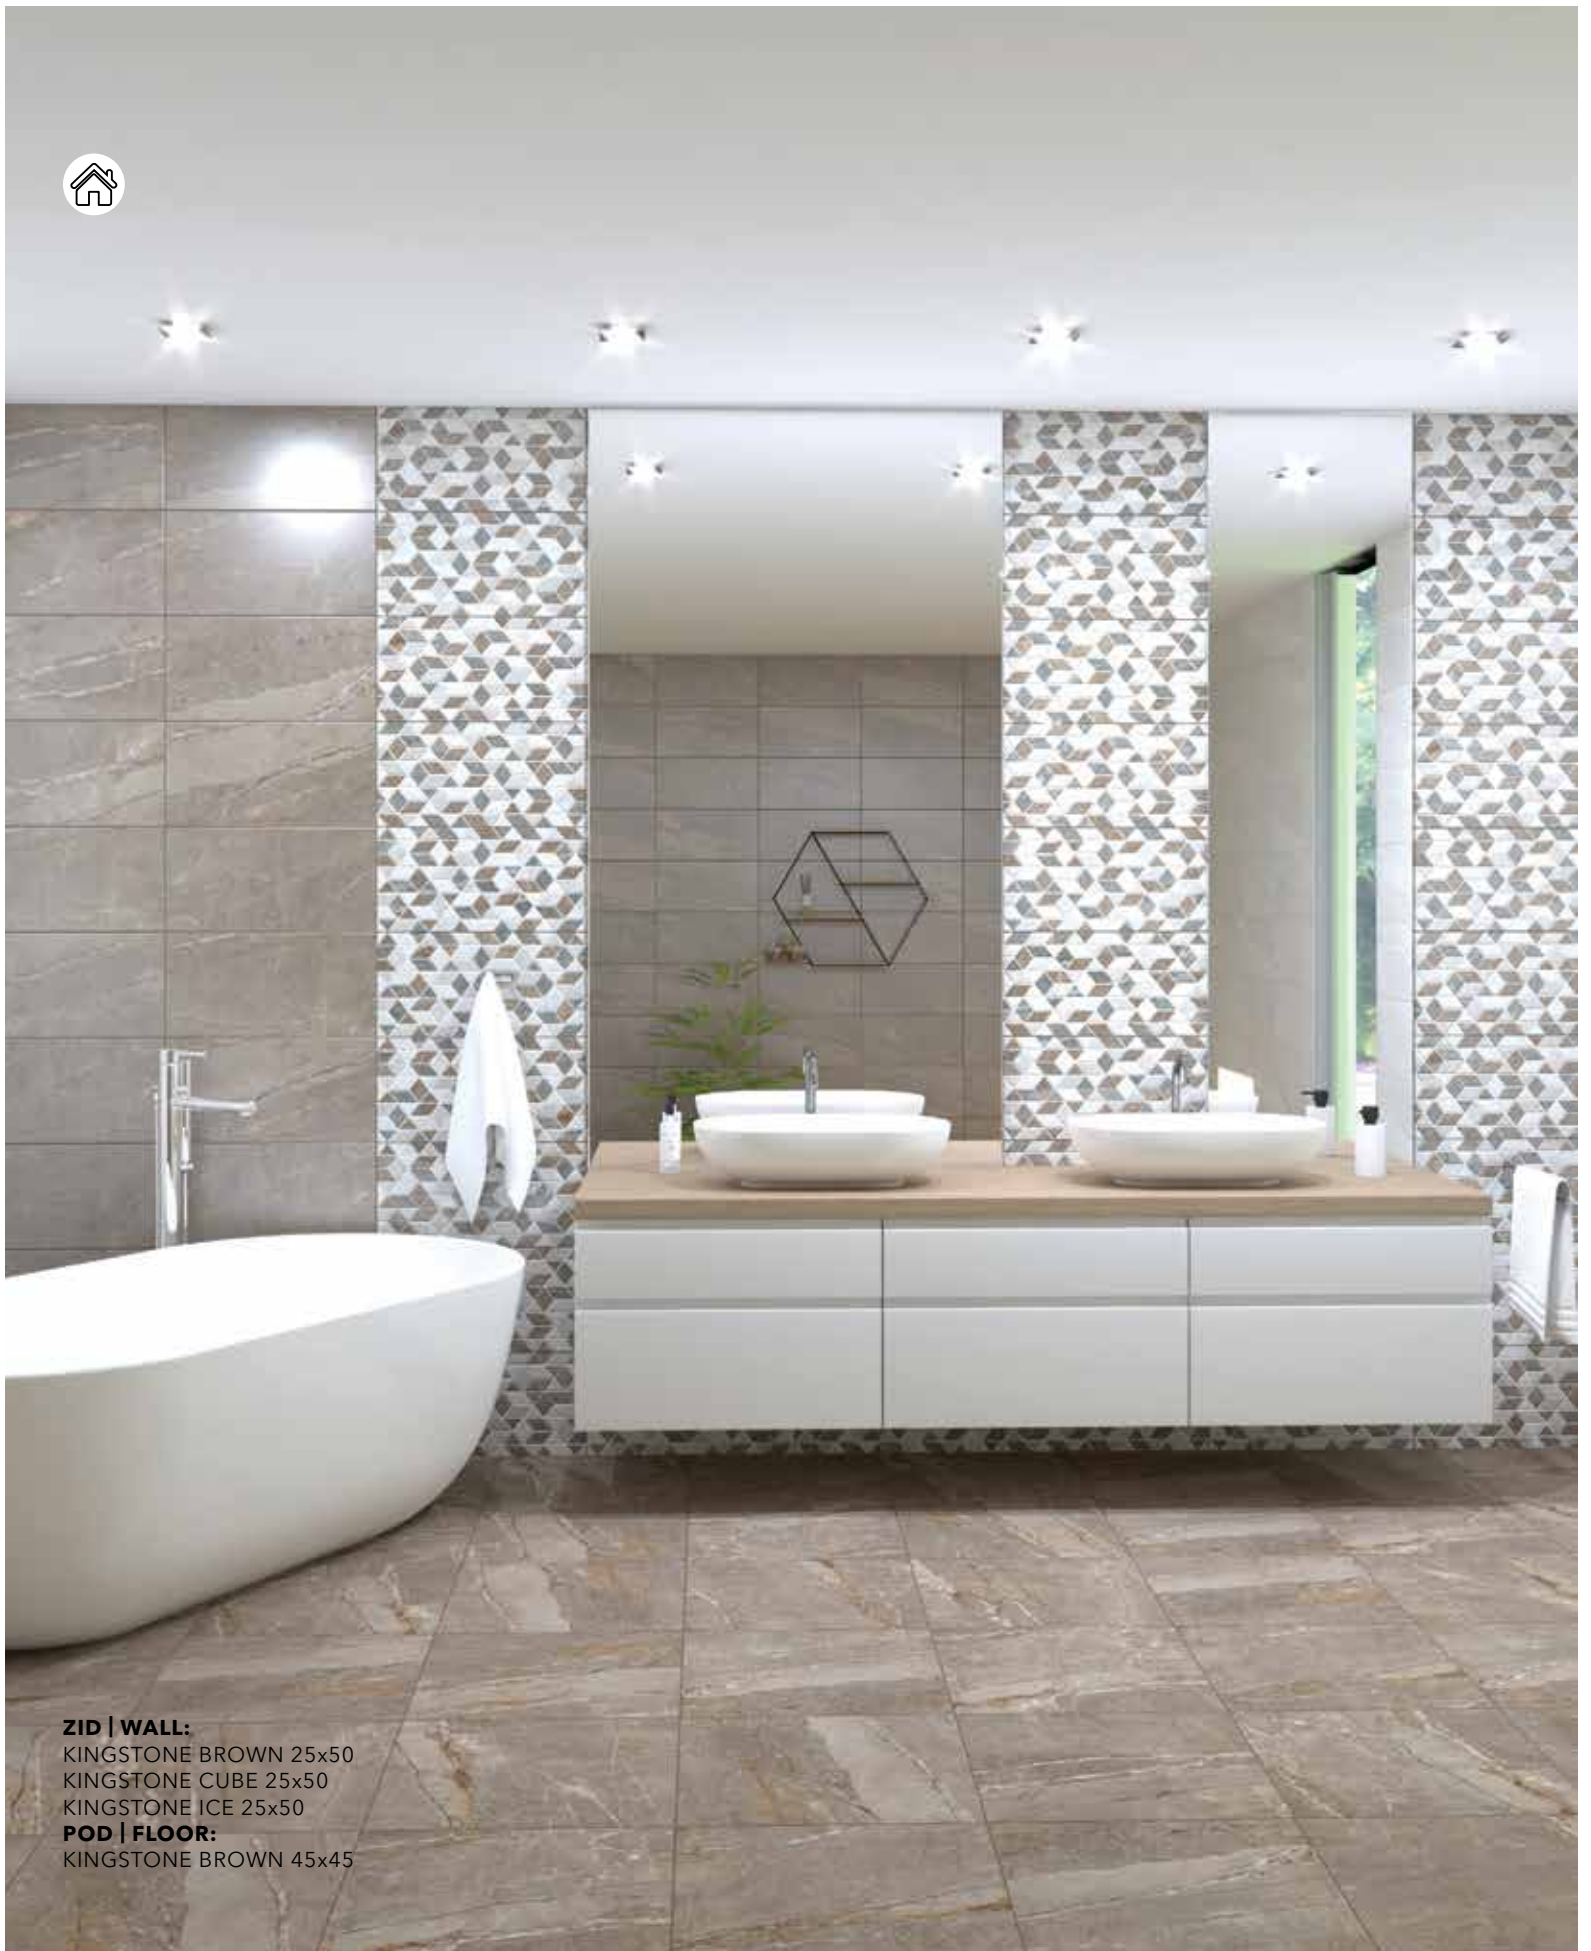

ZID | WALL:
KINGSTONE BROWN 25x50
KINGSTONE CUBE 25x50
KINGSTONE ICE 25x50
POD | FLOOR:
KINGSTONE BROWN 45x45

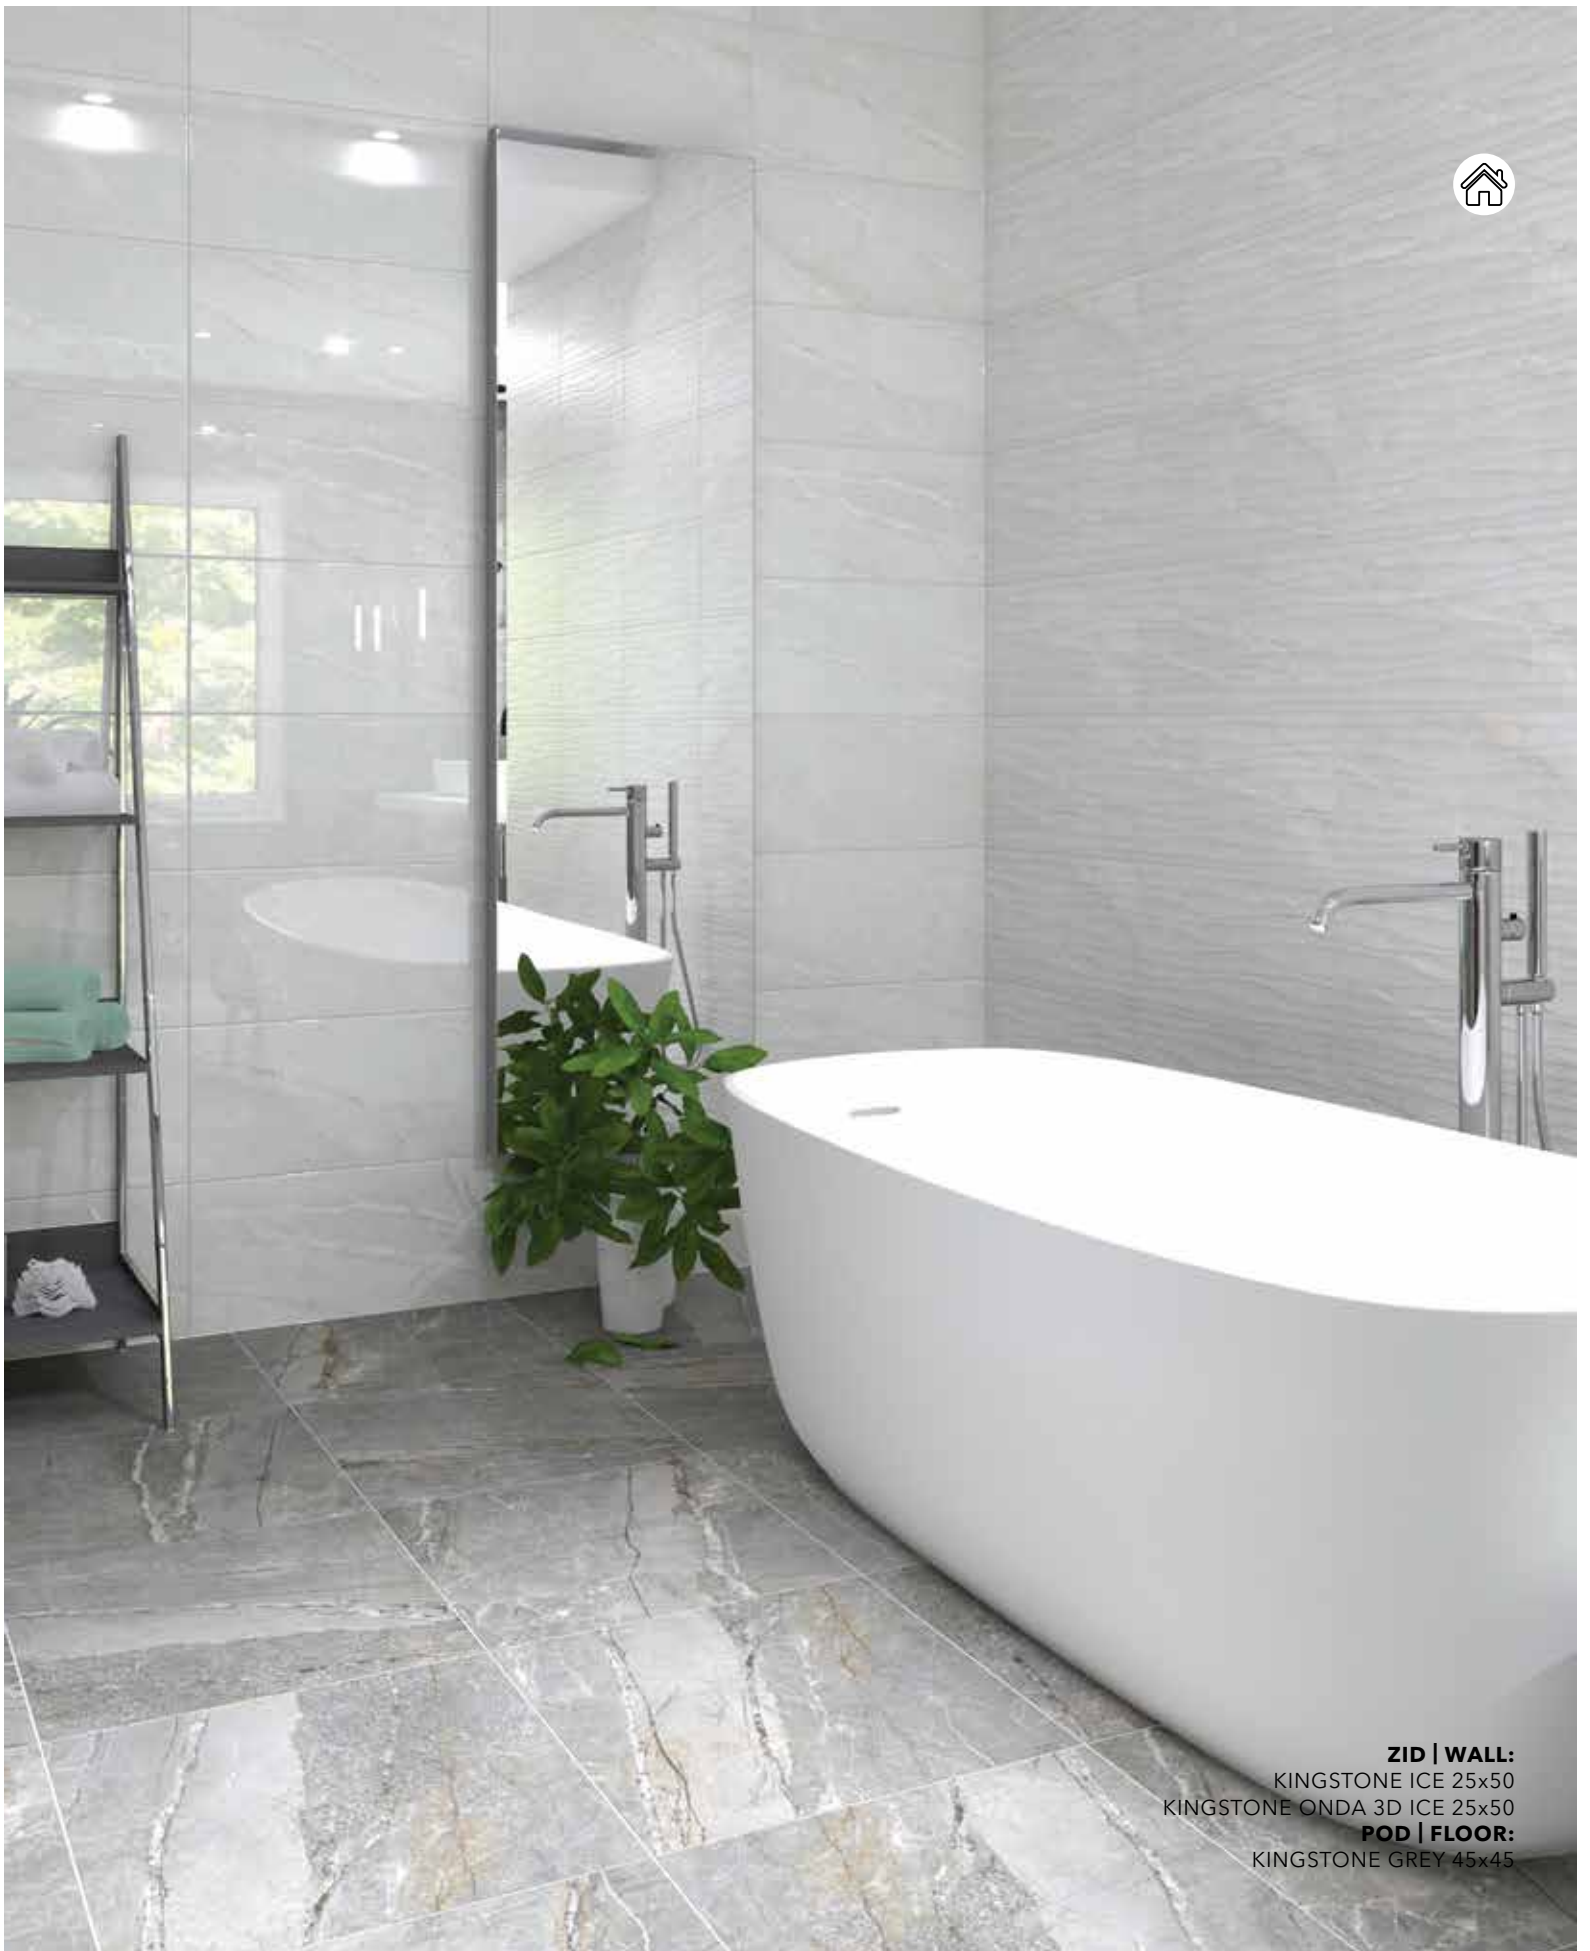

ZID | WALL:
KINGSTONE ICE 25x50
KINGSTONE ONDA 3D ICE 25x50
POD | FLOOR:
KINGSTONE GREY 45x45

12



KINGSTONE ICE 25x50 cm / WT

12



KINGSTONE ONDA 3D ICE 25x50 cm / WT

12



KINGSTONE GREY 25x50 cm / WT

12



KINGSTONE BROWN 25x50 cm / WT

6



KINGSTONE CUBE 25x50 cm / WT



DIN 51097 DIN 51130



KINGSTONE GREY 45x45 cm / FT



KINGSTONE BROWN 45x45 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Seriya Marfil već dugi niz godina predstavlja omiljen izbor kupaca za opremanje kupatila. Odlikuje je dekor kamena, obogaćen toplim, zemljanim tonovima i zanimljivim dekorima.

Zato pruža veliki broj mogućnosti kombinovanja i kreiranja različitih stilova.

For many years, the Marfil series has been a favorite choice of customers for bathroom equipment. It is characterized by stone decor, enriched with warm, earthy tones and interesting decors. That is why it provides a large number of possibilities for combining and creating different styles.




CREMA



CAPPUCCINO



25x50



33x33



8,8 mm



7,3 mm


Marfil

SQUARE AFFAIR





ZID | WALL:
MARFIL CREMA 25x50
MARFIL CAPPUCCINO 25x50
MARFIL MOSAICO 25x50
POD | FLOOR:
MARFIL CREMA 33x33



10



MARFIL CREMA 25x50 cm / WT

4



MARFIL MOSAICO 25x50 cm / WT

10



MARFIL CAPPUCCINO 25x50 cm / WT



DIN 51097 DIN 51130

PEI 4

10



MARFIL CREMA 33x33 cm / FT

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Seriya Arctic idealan je izbor za projekte i poslovne prostore. Odlikuju je jednostavnost dekora i boja, zbog čega se može uklopiti u svaki stil i ambijent.

The Arctic series is an ideal choice for projects and business premises. It is characterized by simplicity of decor and colors, which is why it can fit into any style and ambience.




ICE



DARK



25x50



33x33



8,8 mm




7,3 mm


Artic

SQUARE AFFAIR



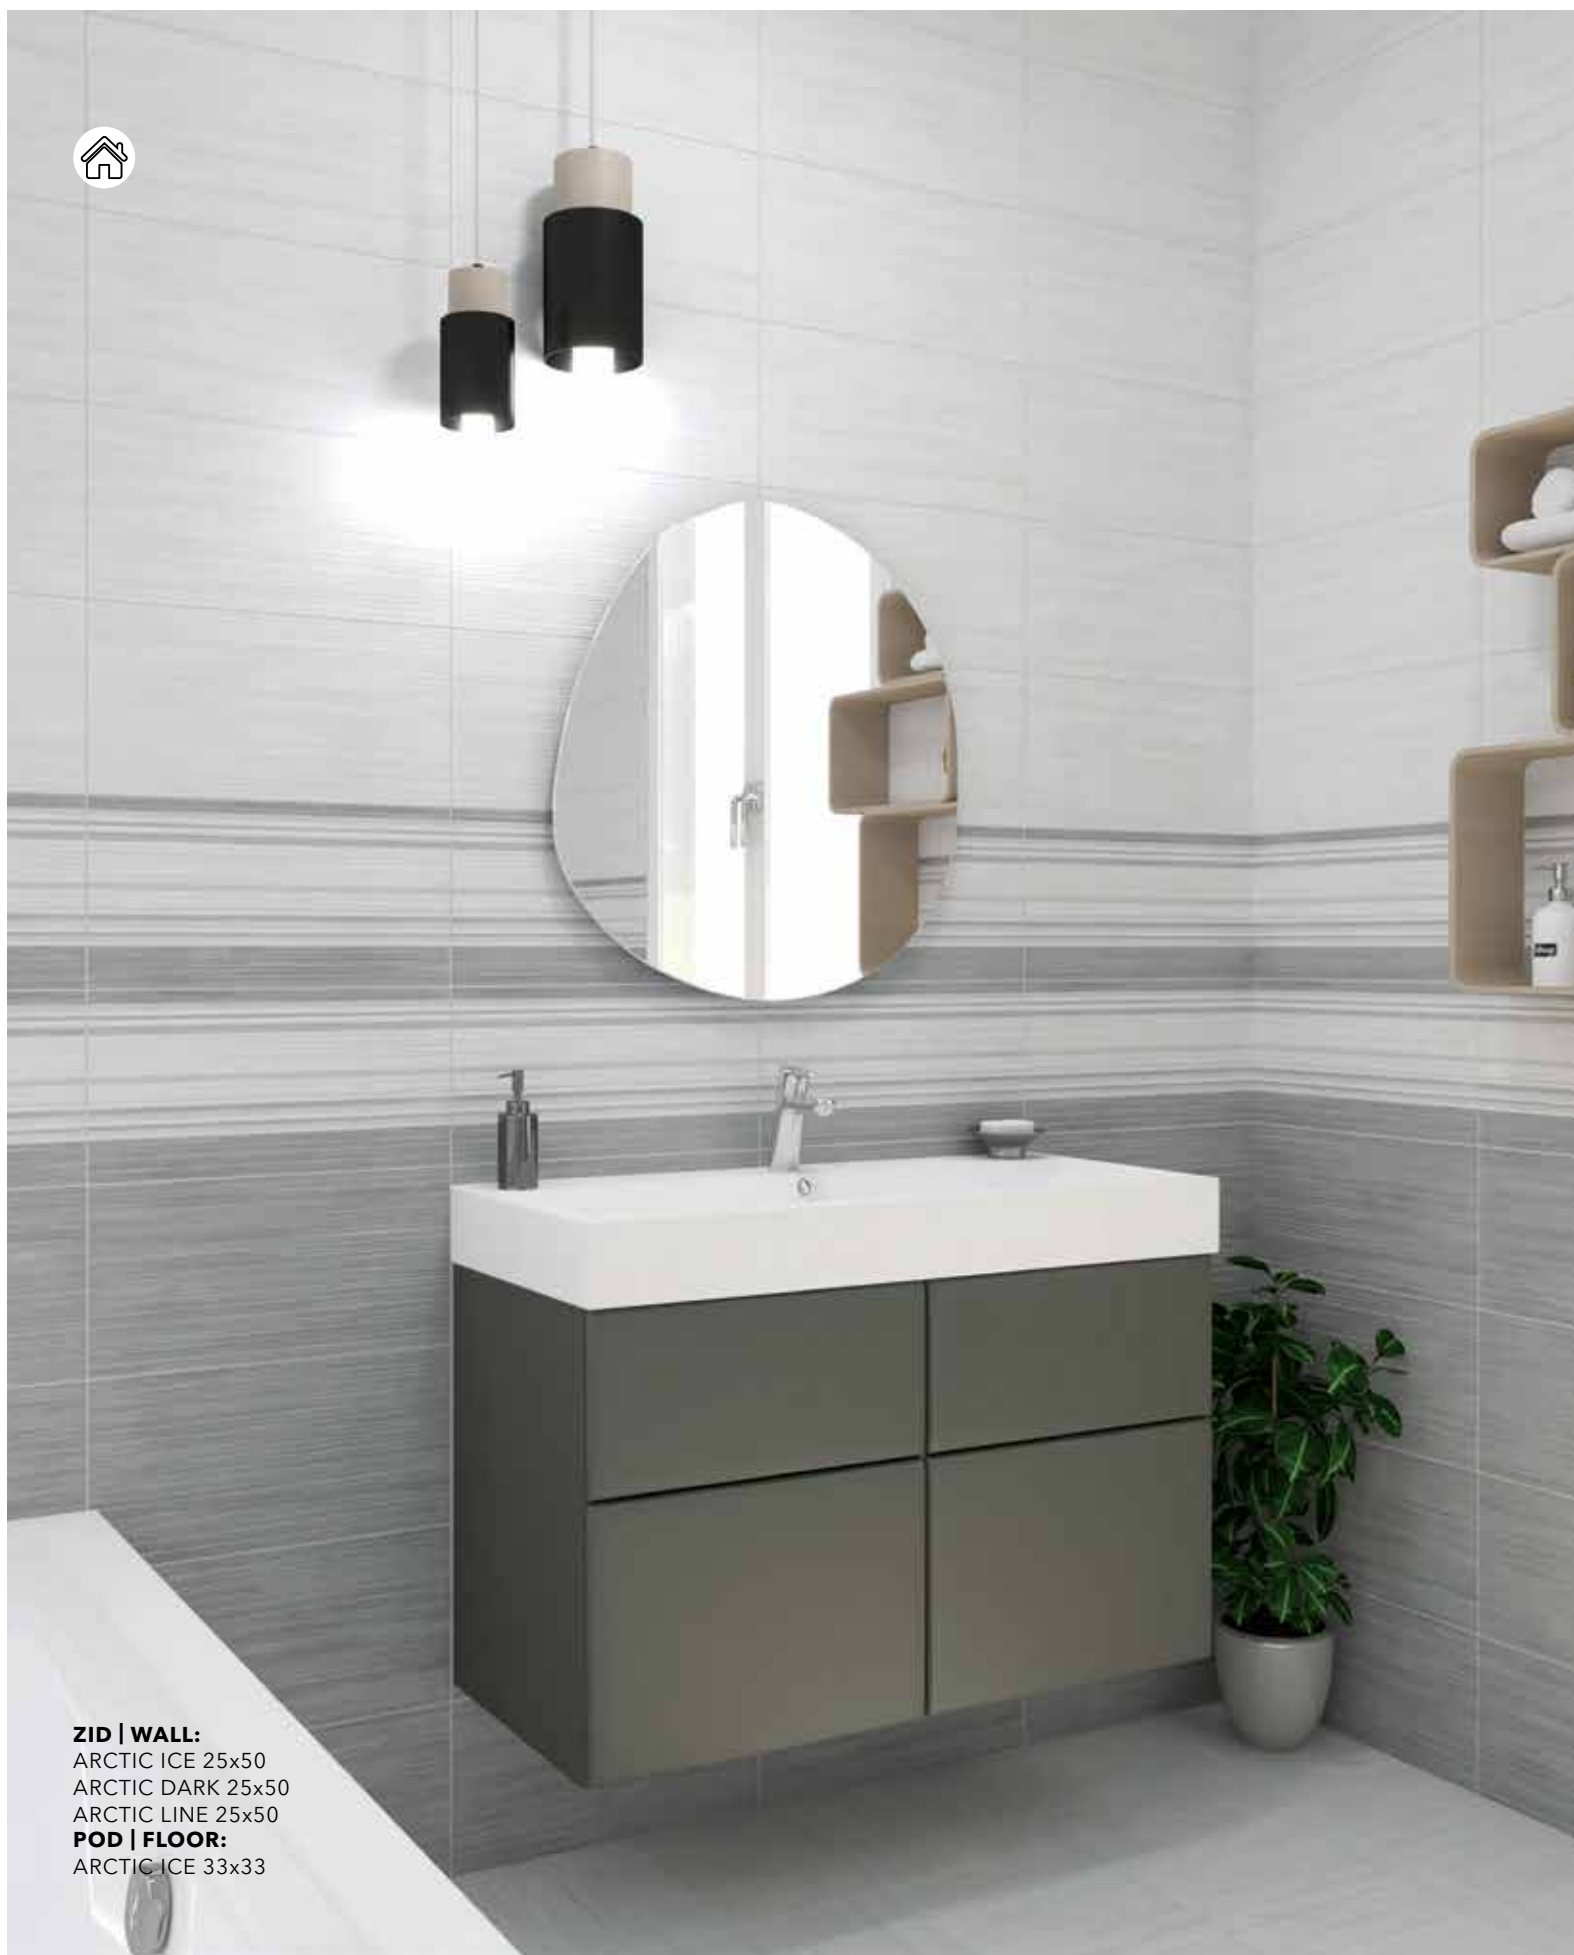

ZID | WALL:
ARCTIC ICE 25x50
ARCTIC DARK 25x50
ARCTIC LINE 25x50
POD | FLOOR:
ARCTIC ICE 33x33




ARCTIC ICE 25x50 cm / WT



ARCTIC DARK 25x50 cm / WT



ARCTIC INDA ICE 25x50 cm / WT

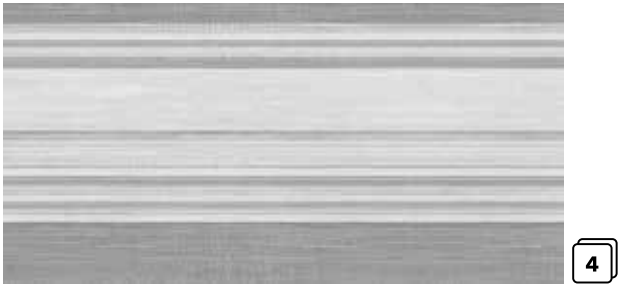

ARCTIC LINE 25x50 cm / WT



DIN 51097 DIN 51130



ARCTIC ICE 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Topli tonovi kafe prva su asocijacija za ovu seriju. Odlična je za postizanje efekta rustike i ušuškanosti.


Warm coffee tones are the first association for this series. It is great for achieving a rustic and tucked-in effect.




BEIGE



DARK



25x50



33x33



8,8 mm



7,3 mm


Comfort

SQUARE AFFAIR





ZID | WALL:
COMFORT BEIGE 25x50
COMFORT DARK 25x50
COMFORT LINE 25x50
POD | FLOOR:
COMFORT BEIGE 33x33



6



COMFORT BEIGE 25x50 cm / WT

6



COMFORT DARK 25x50 cm / WT



COMFORT WAVES 7x50 cm / LI

4



COMFORT LINE 25x50 cm / WT



DIN 51097 DIN 51130

PEI 4

6



COMFORT BEIGE 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

Beli mermer kao klasika koja nikad ne izlazi iz mode prenet je na seriju Carrara. Nežna ali moćna, pružiće vašem prostoru efekat raskoši i moderan izgled.


White marble as a classic that never goes out of fashion has been transferred to the Carrara series. Gentle but powerful, it will give your space the effect of luxury and a modern look.



CARRARA



25x50



45x45



8,8 mm



8,2 mm


Carrara

SQUARE AFFAIR





ZID | WALL:
CARRARA 25x50
CARRARA ONDA 3D 25x50
POD | FLOOR:
CARRARA 45x45



10



CARRARA 25x50 cm / WT

4



CARRARA MOSAIC 3D 25x50 cm / WT

10



CARRARA ONDA 3D 25x50 cm / WT



DIN 51097 DIN 51130

PEI 4

8



CARRARA 45X45 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
45x45	0,2025	8	1,620	28,32	71,280	1270,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	

Već godinama best seler među Square Affair pločicama je serija Habitat. Zbog svoje jednostavnosti i savršeno odabranih boja ona je omiljeni izbor kako za projekte tako i za ličnu upotrebu kupaca.

For years, the best seller among Square Affair tiles has been the Habitat series. Due to its simplicity and perfectly chosen colors, it is a favorite choice for both projects and personal use of customers.



ICE



GREY




NOCE



GRAPHITE



25x50



33x33



8,8 mm




7,3 mm

Habitat

SQUARE AFFAIR




1

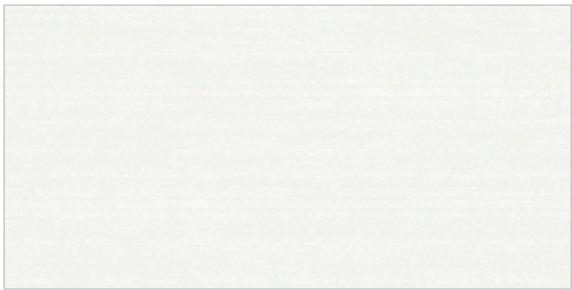

HABITAT ICE 25x50 cm / WT

1

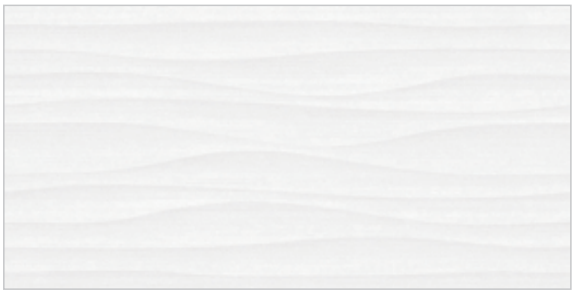

HABITAT ICE ONDA 3D 25x50 cm / WT

1



HABITAT GREY 25x50 cm / WT

1







HABITAT NOCE 25x50 cm / WT

1



HABITAT GRAPHITE 25x50 cm / WT

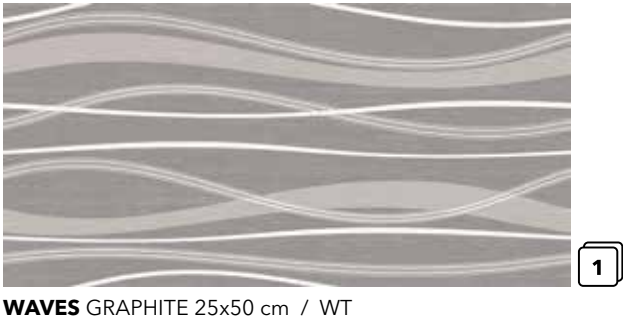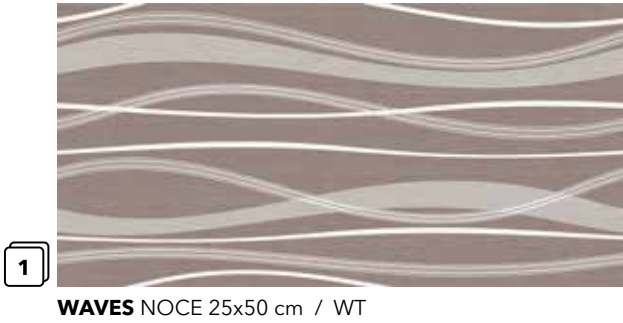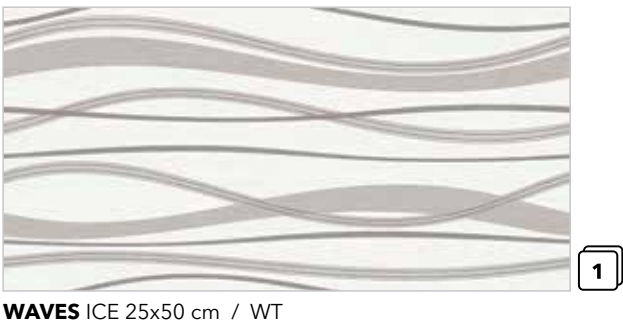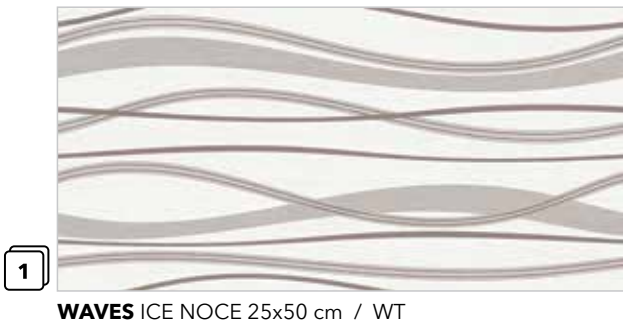

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	



ZID | WALL:


HABITAT ICE 25x50

HABITAT GREY 25x50

HABITAT STRIPES 25x50

POD | FLOOR:

HABITAT GREY 33x33



750L125 **WAVES** ICE NOCE 7x50 cm / LI



750L125 **WAVES** ICE 7x50 cm / LI




550L134 **HABITAT MOSAICO** NOCE 5x50 cm / LI



DIN 51097 DIN 51130



HABITAT NOCE 33x33 cm / FT

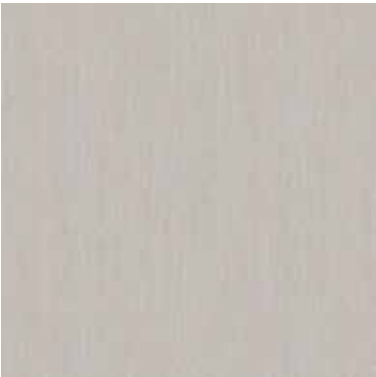

HABITAT GREY 33x33 cm / FT



HABITAT GRAPHITE 33x33 cm / FT

Raskošna serija koja je oživela dekor stare keramike. Sitne pukotine i šare, sjajna glazura i prelepe boje pružiće prostoru jedinstven i originalan izgled. Zidne pločice iz serije Maiolica savršeno se uklapaju sa dekorima drveta.


A sumptuous series that revived the decor of old ceramics. Small cracks and patterns, shiny glaze and beautiful colors will give the space a unique and original look. Wall tiles from the Maiolica series fit perfectly with wooden decores.



BIANCO



25x50



33x33



8,8 mm



7,3 mm


Maiolica

SQUARE AFFAIR





ZID | WALL:
MAIOLICA VINTAGE BIANCO 25x50
POD | FLOOR:
MAIOLICA BIANCO 33x33



6



MAIOLICA BIANCO 25x50 cm / WT

4



MAIOLICA VINTAGE BIANCO 25x50 cm / WT

4



MAIOLICA VINTAGE 25x50 cm / WT



DIN 51097 DIN 51130

PEI 4

6



MAIOLICA BIANCO 33x33 cm / FT

PEI 4

6



MAIOLICA VINTAGE 33x33 cm / FT

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	

Nežan dekor kamena i mirne boje osnovnih pločica upotpunili su dekori Aquarelle, zbog čega je ova serija idealna za sve koji žele da budu jedinstveni. Prostoru daju veseo ali i prefinjen izgled.


The delicate stone decor and the calm colors of the base tiles are complemented by the Aquarella decors, which is why this series is ideal for everyone who wants to be unique. They give the space a cheerful but also refined look.




LIMESTONE



BEIGE



25x50



33x33



8,8 mm



7,3 mm

Limestone

SQUARE AFFAIR





ZID | WALL:
LIMESTONE 25x50
LIMESTONE AQUARELLE 25x50
POD | FLOOR:
LIMESTONE 33x33
FEELING BEIGE 30x60

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



6



LIMESTONE 25x50 cm / WT



8

LIMESTONE BEIGE 25x50 cm / WT

2



LIMESTONE AQUARELLE 25x50 cm / WT



4

LIMESTONE AQUARELLE BEIGE 25x50 cm / WT

6



LIMESTONE LINE 3D 25x50 cm / WT



8

LIMESTONE LINE 3D BEIGE 25x50 cm / WT



DIN 51097 DIN 51130

PEI 4

6



LIMESTONE 33x33 cm / FT

PEI 4

8



LIMESTONE BEIGE 33x33 cm / FT

Dekor kamena nežnih detalja prenet je na seriju Fusion. Uz osnovne pločice, serija je obogaćena reljefnim ali i dekorima živih boja. Ljubitelji dekupaža obožavaju ovu seriju.

The stone decor with delicate details has been transferred to the Fusion series. In addition to the basic tiles, the series is enriched with embossed but also brightly colored decors. Decoupage fans love this series.




FUSION



DARK



25x50



33x33



8,8 mm



7,3 mm

Fusion

SQUARE AFFAIR





ZID | WALL:
FUSION 25x50
FUSION DARK 25x50
FUSION ONDA 3D 25x50

PAKOVANJE / PACKAGING

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
25x50	0,1250	10	1,250	18,30	60,000	905,00	LI LISTELA KOM / PC	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00	IN INSERT KOM / PC	
33x33	0,1089	16	1,742	27,04	73,164	1160,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE	



8



FUSION 25x50 cm / WT



8

FUSION ONDA 3D 25x50 cm / WT

8



FUSION DARK 25x50 cm / WT



FUSION VIOLA 50x50 cm / IN

1



FUSION INDA 25x50 cm / WT



550L115 FUSION ARCOBALENO 5X50 cm / LI



DIN 51097 DIN 51130

PEI 4


8



FUSION 33x33 cm / FT

Klasika koja nikada ne izlazi iz mode - jednostavna bela pločica obogaćena živopisnim dekorima i dekorima sa reljefom. Pravi je izbor za ljubitelje klasike i „country“ stila opremanja.

A classic that never goes out of fashion a simple white tile enriched with colorful decors and decors with relief. It is the right choice for fans of classics and "country" style of furnishing.



BIANCA



25x50




8,8 mm

Bianca

SQUARE AFFAIR



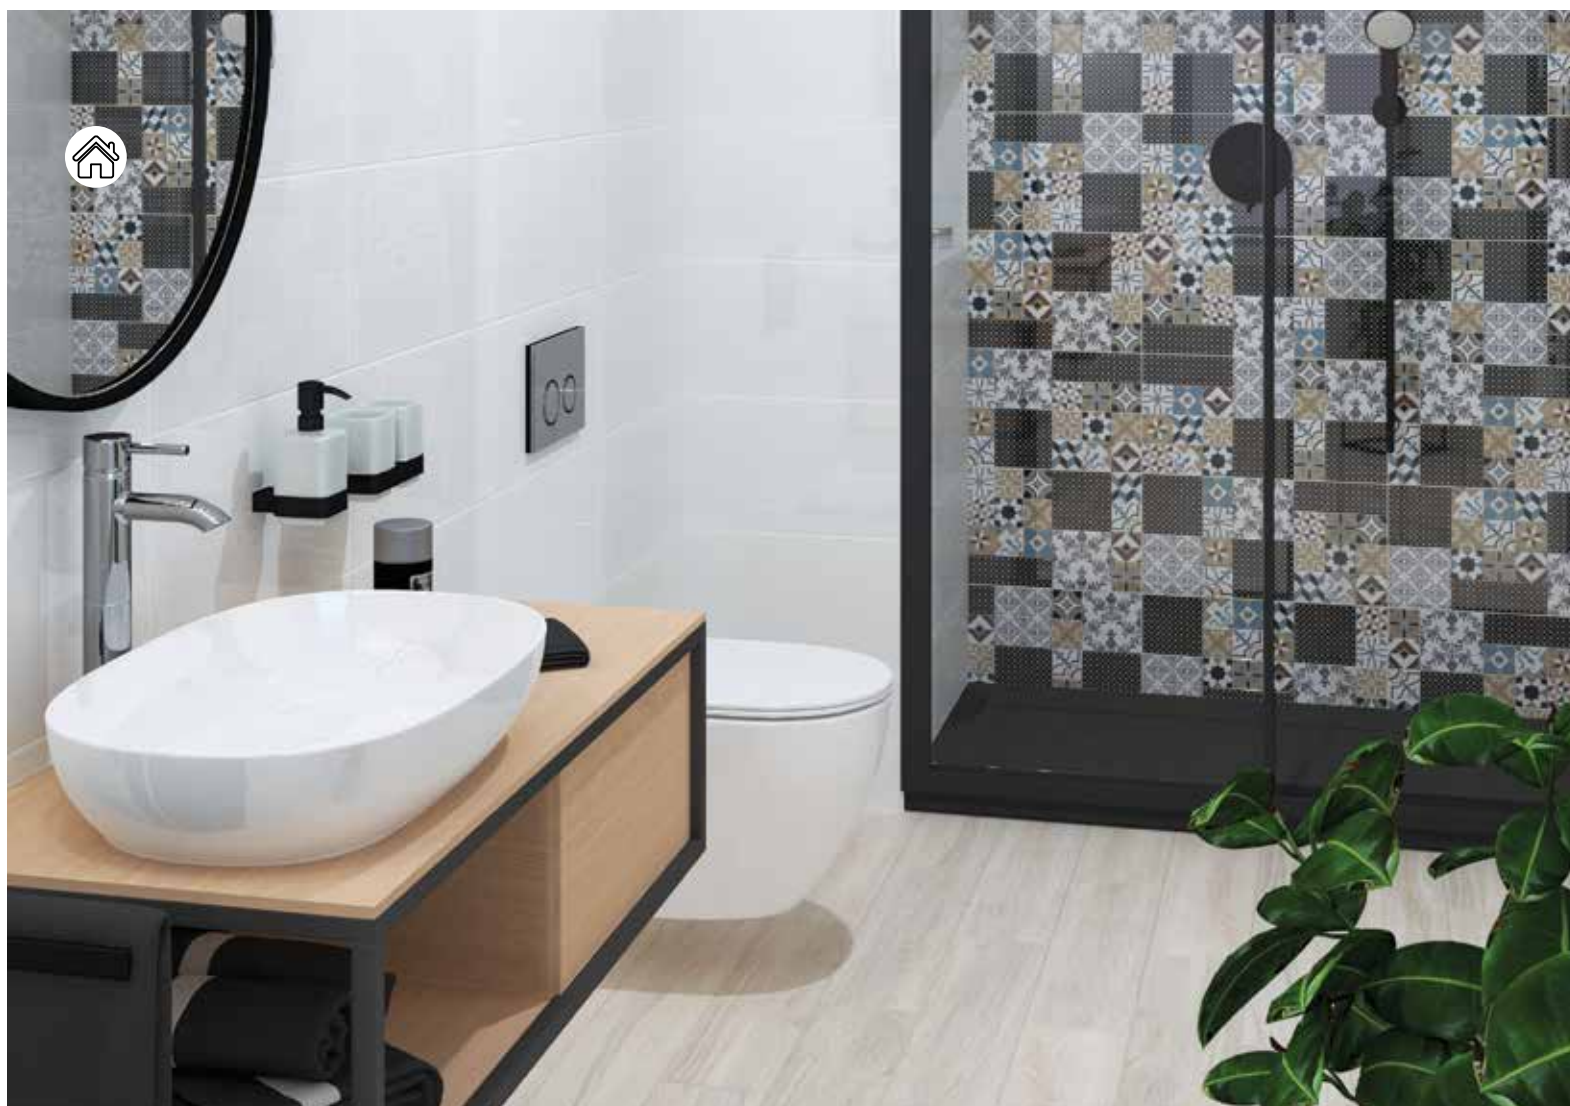

ZID | WALL:
 BIANCA 25x50
 BIANCA JAZZ 25x50
POD | FLOOR:
 STYLE BEIGE 15x60



SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:


CHIC 15x60 cm - na strani / see page 58
STYLE 15x60 cm - na strani / see page 54
LUXOR 59x59 rett cm - na strani / see page 30

FEELING 30x60 cm rett, 15x60 cm - na strani / see page 50
SPACE 29,5x59, 59x59 cm rett - na strani / see page 8

PAKOVANJE / PACKAGING


FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/SYMBOL EXPLANATION	PREPORUČENA FUGA / RECOMMENDED GROUT 3 MM
							WT WALL TILES / ZIDNE PLOČICE M ²	
							FT FLOOR TILES / PODNE PLOČICE M ²	
							LI LISTELA KOM / PC	
							IN INSERT KOM / PC	
25x50	0,1250	10	1,250	18,30	60,000	905,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE	
DECOR 25x50	0,1250	10	1,250	18,30	40,000	605,00		

1



BIANCA 25x50 cm / WT

1

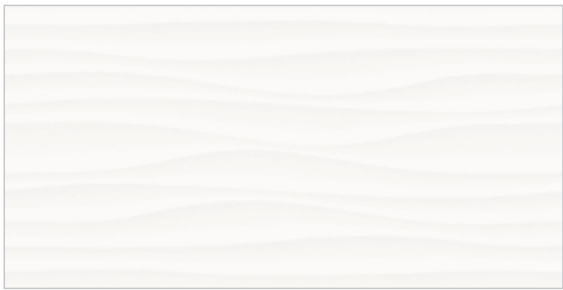


BIANCA ONDA 3D 25x50 cm / WT

4




BIANCA JAZZ 25x50 cm / WT

1

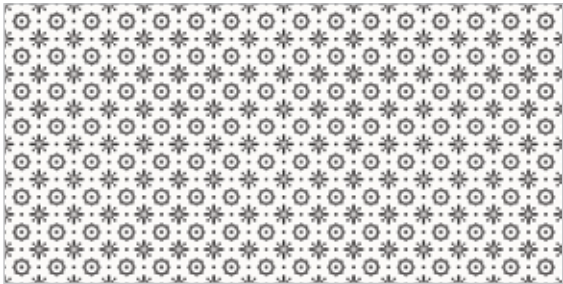

BIANCA PRINT 25x50 cm / WT

1

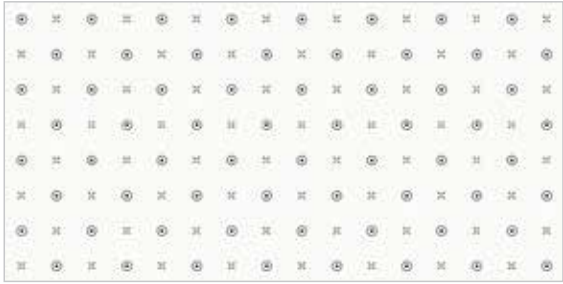

BIANCA MILD 25x50 cm / WT



2550 HOME 25x50 cm / IN



2550 BREAD 25x50 cm / IN



450L163 BREAD 4x50 cm / LI



Tehničke Karakteristike Technical Characteristics

SQUARE AFFAIR

STANDARDI 196, PREPORUKE PRILIKOM UGRADNJE 198, SPECIFIKACIJA PAKOVANJA PLOČICA
I GALANTERIJE 199, OBJAŠNJENJE SIMBOLA 204
STANDARDS 200, RECOMMENDATIONS DURING INSTALLATION 202, CONDITIONS OF TILE AND
DECOR PACKAGINGS 203, SIMBOL EXPLANATION 204

TEHNIČKE KARAKTERISTIKE

„Keramika Kanjiža“ doo iz Kanjiže proizvodi suvo presovane, jednom žarene podne i zidne keramičke pločice (takozvanu monokoturu i monoporozu) kao i ukrasnu galanteriju. Podne pločice su otporne na mraz, pogodne su za postavljanje spolja. Naše keramičke pločice u svim segmentima ispunjavaju zahteve harmonizovanog evropskog standarda SRPS EN 14411.

STANDARDI

Od decembra 2005. godine primenjuje se standard SRPS EN 14411, objavljen uz dozvolu Evropskog komiteta za standardizaciju CEN. Ovaj standard je identičan međunarodnom standardu EN 14411, koji je obavezan za primenu u svim zemljama članicama Evropske Unije. CE znak je simbol usaglašenosti proizvoda, proizvedenog u skladu sa harmonizovanim standardom koji ispunjava bitne zahteve direktive za građevinske proizvode.

Keramičke pločice razvrstavaju se na klase kvaliteta 1, 2 i 3 ispitane sledećim standardima:

SRPS EN 14411 Keramičke pločice – Definicije, klasifikacija, karakteristike, vrednovanje usaglašenosti i označavanje - Definiše termine klasifikacije, karakteristike, vrednovanje usaglašenosti i zahteve za označavanje keramičkih pločica klase kvaliteta 1.

SRPS B.D1.330 Keramičke pločice - Klasifikacija, karakteristike, ocenjivanje i verifikacija stalnosti performansi i označavanje - Definiše klasifikaciju, karakteristike, vrednovanje usaglašenosti i zahteve za označavanje keramičkih pločica klase kvaliteta 2 i 3.

Keramičke pločice razvrstavaju se prema načinu oblikovanja na:

- Keramičke pločice proizvedene vučenjem, Metoda A,
- Keramičke pločice proizvedene suvim presovanjem, Metoda B

Keramičke pločice razvrstavaju se prema upijanju vode na:

- Grupa Ia ako je upijanje vode manje od 0,5%
- Grupa Ib ako je upijanje vode od 0,5 do 3%
- Grupa IIa ako je upijanje vode od 3 do 6%
- Grupa IIb ako je upijanje vode od 6 do 10%
- Grupa III ako je upijanje vode preko 10%

Podela prema prirodi vidne površine:

- Glazirane (GL)
- Neglazirane (UGL)

Asortiman proizvoda Keramika Kanjiža razvrstava se na:

Podne pločice Grupa B Ia Prilog G

Zidne pločice Grupa B III Prilog K

Metode ispitivanja korišćene za određivanje karakteristika proizvoda su opisane u standardima SRPS ISO 10545.

SRPS ISO 10545-1 Uzimanje uzoraka i osnove za prihvatanje – Ovaj standard utvrđuje broj uzoraka koje treba proveriti iz partije i maksimalni broj dozvoljenih grešaka.

SRPS ISO 10545-2 Određivanje mera i kvaliteta vidne površine – Ovim standardom utvrđuje se metoda za određivanje mernih karakteristika (dužina, širina, debljina, pravost stranica, odstupanje od pravog ugla, ravnost površine) i kvalitet površine keramičkih pločica.

SRPS ISO 10545-3 Određivanje upijanja vode, prividne poroznosti, prividne relativne zapreminske mase i zapreminske mase – Ovim ispitivanjem se utvrđuje metoda za određivanje upijanja vode i prividne poroznosti keramičkih pločica.

SRPS ISO 10545-4 Određivanje modula loma pri savijanju i čvrstoće pri lomu – Utvrđuje metodu ispitivanja za određivanje čvrstoće pri lomu. Dobijeni podatak ukazuje na opterećenje koju pločica može podneti.

SRPS ISO 10545-7 Određivanje otpornosti glaziranih pločica prema površinskom habanju – PEI klasifikacija – Ocenjuje otpornost glazure prema površinskom habanju. Postupak se vrši rotiranjem sredstva za habanje i ocenjivanjem delovanja habanja, vizuelnim poređenjem pločica izloženih habanju i pločica koje nisu bile izložene habanju. Ocenjivanje proizvoda se vrši od 0 do 5, u zavisnosti od broja obrtaja rotirajućeg sredstva i pojave oštećenja (5 je najviša klasa otpornosti glaziranih pločica prema površinskom habanju).

PEI - klasifikacija glaziranih podnih pločica u odnosu na njihovu otpornost prema habanju.

PEI 0 Glazirane pločice u ovoj klasi ne preporučuju se za korišćenje na podovima.

PEI 1 Prikladno za pokrivanje podnih površina u kojima se hoda isključivo u obući sa mekanim đonovima ili bosonog, bez nečistoća koje grebu podnu površinu (na primer stambena kupatila i spavaće sobe bez direktnog pristupa spolja).

PEI 2 Prikladno za pokrivanje podnih površina u kojima se hoda u mekanoj ili običnoj obući sa uobičajeno malim količinama nečistoće koja grebe površinu (na primer sobe i prostori za dnevni boravak u kućama i stanovima sa izuzetkom kuhinja, ulaza i prostora u kojima je veliki promet).

PEI 3 Prikladno za pokrivanje podnih površina gde se često hoda u običnoj obući sa malo nečistoće koja grebe pod (na primer stambene kuhinje, holovi, hodnici, balkoni, terase). Ne odnosi se na izuzetnu obuću, na primer čizme okovane ekserima.

PEI 4 Prikladno za podove tamo gde se odvija uobičajen promet sa nešto više nečistoće koja grebe pod (na primer ulazi, javne kuhinje, hoteli, izložbeni i prodajni prostori).

PEI 5 Prikladno za podove sa stalnim velikim prohodnim opterećenjem i prisutnom prljavštinom koja grebe (na primer javne površine kao što su trgovački centri, unutrašnje aerodromske prostorije, hotelska predvorja i primena u industriji).

Ova klasifikacija važi za primenu pod uobičajenim uslovima.

Informacija o otpornosti podnih pločica prema habanju navedena je ispod slike podnih pločica.

SRPS ISO 10545-8 Određivanje linearnog termičkog širenja – Određuje se koeficijent linearnog termičkog širenja za opseg od sobne temperature do 100 °C. Vrednost pokazuje u kojoj meri će se postavljena pločica širiti usled temperaturnih promena. Ovaj podatak treba da se uzme u obzir prilikom određivanja debljine fuge između pločica.

SRPS ISO 10545-9 Određivanje otpornosti prema temperaturnom šoku – Pločica se izlaže nagloj promeni temperature i nakon toga se proverava pojava oštećenja.

SRPS ISO 10545-10 Određivanje širenja vlaženjem – Ovim standardom se utvrđuje metoda za određivanje širenja keramičkih pločica vlaženjem. Podatak pomaže prilikom dimenzionisanja fuge između pločica.

SRPS ISO 10545-11 Određivanje otpornosti prema vlasavosti glaziranih pločica – Vrš se proveru pojave pukotina na površini glazirane pločice nakon tretiranja sa parom na pritisku od 500 kPa i temperaturi od 159 °C, dva sata u autoklavu.

SRPS ISO 10545-12 Određivanje otpornosti prema mrazu – Po ovoj metodi pločice se izlažu smrzavanju i otapanju u temperaturnom opsegu od -5 °C do +5 °C, najmanje 100 ciklusa. Ovo ispitivanje simulira ponašanje proizvoda u spoljašnjim klimatskim uslovima.

SRPS ISO 10545-13 Određivanje otpornosti prema hemikalijama – Ovim ispitivanjem se utvrđuje otpornost pločica prema dejstvu hemikalija za domaćinstvo, soli u vodi bazena za plivanje, kiselina, baza i otpornost prema dejstvu olovke HB tvrdoće. U zavisnosti od vrste hemikalija i otpornosti pločice se dele u sledeće klase:

Hemikalije za domaćinstvo i soli u vodi bazena za plivanje:

- A bez vidljivih efekata
 - B male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
 - C značajne promene
- Kiseline i baze (malih koncentracija)
- LA bez vidljivih efekata
 - LB male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
 - LC značajne promene
- Kiseline i baze (velikih koncentracija)
- HA bez vidljivih efekata
 - HB male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
 - HC značajne promene

SRPS ISO 10545-14 Određivanje otpornosti prema stvaranju mrlja – Vidna površina pločice se dovodi u kontakt sa sredstvom za stvaranje mrlja, nakon odstranjivanja vrši se klasifikacija. Klasifikacija se vrši od 5 do 1 u zavisnosti od lakoće uklanjanja mrlje, pri čemu se kod klase 5 najlakše uklanja mrlja.

DIN 51130:2004-06 Utvrđivanje karakteristika za sprečavanje klizavosti

Za veće podne površine, industrijske i komercijalne namene poželjno je da je koeficijent trenja viši od onih koji se koristi u kućama. Nemački standard DIN 51130:2010-10 definiše postupak i služi za testiranje i klasificiranje anti kliznih svojstava podnih obloga koji su predviđeni za korišćenje u radnim prostorima i područjima gde je prisutna opasnost od klizanja. Prihvaćeni ugao se utvrđuje na podnoj oblozi premazanoj sa sredstvom za podmazivanje (ulje) a osoba koja sprovodi kontrolu sa kontrolnim cipelama kreće se napred - nazad po kontrolisanoj podnoj oblozi koja se počinje naginjati od horizontalnog stanja i nagib raste do prihvaćenog ugla tj. ugla pri kom kontrolor dostiže granicu sigurnog hodanja. Prihvaćeni ugao služi za ocenu stepena otpornosti na klizanje

PRIHVAĆENI UGAO	KLASA OTPORNOSTI NA KLIZANJE	PREPORUČUJE SE
6° do 10°	R 9	Ulazi u kuće, dnevni boravak...
10° do 19°	R 10	Hodnici, prodavnice, radionice...
19° do 27°	R 11	Terase, balkoni...
27° do 35°	R 12	Stepeništa, gazišta u vrtu...
Preko 35°	R 13	Oblasti sa specijalnim zahtevima

DIN 51097:02.80 Utvrđivanje karakteristika za sprečavanje klizavosti

U uslovima vlažnosti, na gazištima podnih obloga koje se koriste u kupatilu, svlačionicama, sanitarnim čvorovima i sličnim prostorijama, ocenjuju se karakteristike podnih obloga po ovom standardu.

tokom izvođenja postupka kontinuirano i jednolično se nanosi tečnost na test podnu oblogu koja se počinje naginjati od horizontalnog stanja i nagib raste do prihvaćenog ugla tj. ugla pri kom kontrolor dostiže granicu sigurnog hodanja. Osoba koja sprovodi kontrolu kreće se napred - nazad po kontrolisanoj podnoj oblozi bosih nogu. U zavisnosti od postignutog ugla nagiba test obloge se mogu svrstati u sledeće grupe:

SREDNJA VREDNOST NAGIBA UGLA	KLASA OTPORNOSTI NA KLIZANJE	PREPORUČUJE SE
≥ 12°	A	Kupatila
≥ 18°	B	Svlačionice, sanitarni čvor...
≥ 24°	C	Oblasti sa specijalnim zahtevima

Informacija o otpornosti podnih pločica prema klizanju navedena je pored slike podnih pločica, a odnosi se samo na one pločice koje zadovoljavaju klasu otpornosti na klizanje (na ulje ili vodu).

SRPS U.F2.011 Završni radovi u građevinarstvu – Izvođenje keramičarskih radova – Standard utvrđuje postupak za oblaganje zidova, podova keramičkim pločicama u unutrašnjosti objekta i spolja.

PREPORUKE PRILIKOM UGRADNJE

- Pre ugradnje zidne pločice treba potopiti u vodu radi boljeg prijanjanja za podlogu.
- Shodno standardu SRPS U.F2.011 pločice obavezno postaviti sa fugom. Minimalna fuga za zidne i podne pločice je 3 mm.
- Podloga za postavljanje pločica treba da bude suva (ne sveže malterisana) i bez strukturnih pukotina.
- Prilikom kupovine pločica obavezno obratiti pažnju na oznaku kalibra i nijanse. U jednoj prostoriji postavljati isključivo pločice iste oznake kalibra i nijanse.
- Za digitalan način dekoracije pločica karakterističan je veći broj lica različitog izgleda. Pre postavljanja pločica preporučljivo je slaganje nekoliko m².
- Ukoliko se pločice postavljaju „na smicanje“, preporučuje se smicanje na maksimalno 30% dužine.
- Reklamacije na ugrađene pločice se ne prihvataju, osim reklamacija na skrivene mane proizvoda a odnose se na trajnost pločica po standardu SRPS EN 14411.

GRES PODNE PLOČICE SRPS EN 14411, Grupa B Ia, Prilog G

OSOBINA	METODA ISPITIVANJA	TOLERANCIJA % / MM	
		SRPS EN 14411	KK
Dužina i širina	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Debljina	SRPS ISO 10545-2	± 5,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Odstupanje od pravog ugla	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Ravnost stranica	SRPS ISO 10545-2	± 0,5 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Ravnost površine	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	+ 0,20 % /- 0,1 % / max. (+ 1.5 /-0.5) mm
Kvalitet površine	SRPS ISO 10545-2	Min. 95% bez vidljivog oštećenja	
Upijanje vode	SRPS ISO 10545-3	≤ 0,50 %	< 0,30 %
Čvrstoća pri lomu	SRPS ISO 10545-4	Za deb. ≥ 7.5 mm 1300 N Za deb. < 7.5 mm 700 N	> 1600 N > 1100 N
Modul loma pri savijanju	SRPS ISO 10545-4	> 35 N/mm ² > 32 N/mm ²	> 40 N/mm ²
Otpornost na habanje	SRPS ISO 10545-7	Beleži se klasa habanja i broj ciklusa	Deklarisano od strane proizvođača
Koeficijent linearnog termičkog širenja	SRPS ISO 10545-8	Deklarisana vrednost	7×10 ⁻⁶ K ⁻¹
Otpornost prema temperaturnom šoku	SRPS ISO 10545-9	Zahteva se	Odgovara
Otpornost prema vlasavosti	SRPS ISO 10545-11	Zahteva se	Odgovara
Otpornost prema mrazu	SRPS ISO 10545-12	Zahteva se	Odgovara
Otpornost prema hemikalijama u domaćinstvu	SRPS ISO 10545-13	Najmanje B	A
Otpornost prema stvaranju mrlja	SRPS ISO 10545-14	Najmanje klasa 3	Klasa 5

ZIDNE PLOČICE SRPS EN 14411, Grupa B III, Prilog K

OSOBINA	METODA ISPITIVANJA	TOLERANCIJA % / MM	
		SRPS EN 14411	KK
Dužina i širina	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Debljina	SRPS ISO 10545-2	± 10,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Odstupanje od pravog ugla	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Ravnost stranica	SRPS ISO 10545-2	± 0,3 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Ravnost površine	SRPS ISO 10545-2	+ 0,5 % /- 0,3 % / max. (+ 2.0 /-1.5) mm	+ 0,25 % /- 0,1 % / max. (+ 1.5 /-0.5) mm
Kvalitet površine	SRPS ISO 10545-2	Min. 95% bez vidljivog oštećenja	
Upijanje vode	SRPS ISO 10545-3	> 10,00 %	> 15,00 %
Čvrstoća pri lomu	SRPS ISO 10545-4	Za deb. ≥ 7.5 mm 600 N Za deb. < 7.5 mm 200 N	> 600 N
Modul loma pri savijanju	SRPS ISO 10545-4	> 12 N/mm ² > 15 N/mm ²	> 15 N/mm ²
Koeficijent linearnog termičkog širenja	SRPS ISO 10545-8	Deklarisana vrednost	7×10 ⁻⁶ K ⁻¹
Otpornost prema temperaturnom šoku	SRPS ISO 10545-9	Zahteva se	Odgovara
Otpornost prema vlasavosti	SRPS ISO 10545-11	Zahteva se	Odgovara
Otpornost prema hemikalijama u domaćinstvu	SRPS ISO 10545-13	Najmanje B	A
Otpornost prema stvaranju mrlja	SRPS ISO 10545-14	Najmanja klasa 3	Klasa 5

IDENTIFIKACIJA PROIZVODA NA KUTIJAMA I NA PALETAMA

U procesu automatskog pakovanja keramičke pločice se pakuju u kartonsku ambalažu na koju industrijski štampač štampa osnovne podatke identifikacije proizvoda. Industrijski štampač štampa: datum, ime proizvoda, klasu, nijansu, kalibar proizvoda, identifikacioni kod klasera pločica, šifru i radni nalog proizvoda. Svaka paleta gotovog proizvoda sadrži bar-cod, pomoću koga se pločice identifikuju.

SPECIFIKACIJA PAKOVANJA PLOČICA I UKRASNE GALANTERIJE

 I TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

PODNE PLOČICE GRUPA B Ia

PAKOVANJE PODNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	33 x 33	7,3	0,1089	16	1,742	27,04	42	73,164	1160,00
	45 x 45	8,2	0,2025	8	1,620	28,32	44	71,280	1270,00
	30 x 60	8,8	0,1800	6	1,080	19,32	48	51,840	965,00
	15 x 60	8,8	0,0900	11	0,990	18,81	56	55,440	1080,00

 I TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

REKTIKOVANE PLOČICE

PAKOVANJE PODNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	29,5 x 59	8,8	0,17405	6	1,044	18,36	48	50,112	910,00
	59 x 59	9,0	0,3481	4	1,392	25,20	30	41,760	780,00

 I TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

ZIDNE PLOČICE GRUPE B III

PAKOVANJE ZIDNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	25 x 50	8,8	0,1250	10	1,250	18,30	48	60,000	905,00
	20 x 60	9,0	0,1200	13	1,560	23,01	44	68,640	1040,00
	25 x 75	9,2	0,1875	7	1,312	20,37	48	62,976	1005,00
	25 x 50 D	8,8	0,1250	10	1,250	18,30	32	40,000	605,00
	20 x 60 D	9,0	0,1200	13	1,560	23,01	33	51,480	780,00
	25 x 75 D	9,2	0,1875	7	1,312	20,37	32	41,984	670,00

UKRASNA GALANTERIJA

PAKOVANJE CENTRALNIH DEKORA	FORMAT	KOMADA U KUTIJI	MASA KUTIJE (KG)	KOMADA KUTIJA NA PALETI	MASA PALETE (KG)
	5050	6	24,198	30	750,00

PAKOVANJE LISTELA	FORMAT	KOMADA U KUTIJI	MASA KUTIJE (KG)	KOMADA KUTIJA NA PALETI	MASA PALETE (KG)
	450L	22	7,3	60	460,00
	550L	11	4,5	60	290,00
	750L	11	6,6	60	415,00

TECHNICAL CHARACTERISTICS

„Keramika Kanjiža“ doo from Kanjiža produces dry pressed single fired floor and wall ceramic tiles (so-called monocuttura and monoporosa), as well as decorative accessories. The floor tiles are frost resistant, suitable for installation outside. Our ceramic tiles, in all their segments, meet the requirements of the harmonized European standard SRPS EN 14411.

STANDARDS

Since December 2005, the standard SRPS EN 14411 applies, published with the permission of the European Committee for Standardization CEN. This standard is an identical international standard EN 14411 which is compulsorily applied in all member states of the European Union. The CE-mark is a symbol of product conformity, developed in accordance with the harmonized standard that meets the important requirements of the Construction Products Directive.

Ceramic tiles are classified into quality classes 1,2,3 tested by the following standards:

SRPS EN 14411 Ceramic tiles – Definition, classification, characteristics and designation – Defines terms and determines classifications, characteristics and requirements for designation of ceramic tiles with the best commercial quality (first class). According to the standard, the ceramic tiles are classified into groups according to the manner of production and water absorption.

SRPS B.D1.330 Ceramic tiles - Classification, characteristics, evaluation and verification of performance constancy and labeling - Defines the classification, characteristics, evaluation of conformity and requirements for marking of ceramic tiles of class 2 and 3.

Classification according to the manner of production:

- Group A Extruded ceramic tiles
- Group B Dry pressed tiles

Classification according to water absorption:

- Group Ia Water absorption less than 0,5%
- Group Ib Water absorption from 0,5 to 3%
- Group IIa Water absorption from 3 to 6%
- Group IIb Water absorption from 6 to 10%
- Group III Water absorption more than 10%

Classification according to the nature of the visible surface:

- Glazed (GL)
- Unglazed (UGL)

The products of “Keramika Kanjiža” are divided into the following groups:

- Floor tiles Group B Ia Attachment G
- Wall tiles Group B III Attachment K

Testing methods used for determination of the product characteristics are described in the standards SRPS ISO 10545.

SRPS ISO 10545-1 Sampling and basis for acceptance – This standard determines the number of samples that should be checked from the series and a maximal number of allowed mistakes.

SRPS ISO 10545-2 Determination of dimensions and quality of visible surface – This standard establishes a method for determining the measurement characteristics (length, width, thickness, flatness of sides, deviation for a right angle, and flatness of the surface) and quality of the surface of ceramic tiles.

SRPS ISO 10545-3 Determination of water absorption, apparent porosity, apparent relative density and bulk density – This testing establishes a method for determination of water absorption and apparent porosity of ceramic tiles.

SRPS ISO 10545-4 Determination of modulus of rupture and fracture strength – Establishes a testing method for determining the fracture strength. Obtained data indicate the load that the tile can bear.

SRPS ISO 10545-7 Determination of surface abrasion resistance of glazed tiles - PEI classification – The glaze resistance to surface abrasion is being determined. The procedure is performed by rotation of assets for abrasion and assessment of the abrasion effect, by visual comparison of tiles exposed to abrasion and tiles which were not exposed to abrasion. The product assessment is performed from 0 to 5, depending on the speed of rotation tools and occurrence of damages (5 is the highest class of resistance of glazed tiles according to the surface abrasion).

PEI – classification of glazed floor tiles in relation to their abrasion resistance

PEI 0 Glazed tiles in this class are not recommended for application on floors.

PEI 1 Appropriate for covering floor surfaces where people walk only in shoes with soft soles or barefoot, without dirt which scratches the floor surface (for example, residential bathrooms and bedrooms without direct access from outside).

PEI 2 Appropriate for covering floor surfaces where people walk in soft or plain shoes, usually with small quantities of dirt which scratches the surface (for example, rooms and living rooms in houses and apartments, with the exception of the kitchen, the doorway and crowded rooms).

PEI 3 Appropriate for covering floor surfaces where people often walk in plain shoes, with little dirt which scratches the floor (for example, residential kitchens, halls, corridors, balconies, terraces). This does not refer to exceptional footwear, for example – studded boots.

PEI 4 Appropriate for floors with normal movement of people with slightly more dirt which scratches the floor (for example entrances, public kitchens, hotels, exhibition and retail space).

PEI 5 Appropriate for floors with constant great natural load and presence of dirt which scratches (for example, public surfaces such as commercial centers, airport interior rooms, hotel lobbies and application in industry).

This classification is valid for application in usual conditions.
The information about abrasive resistance of floor tiles is indicated next to the figures of floor tiles.

- SRPS ISO 10545-8 Determination of linear thermal expansion – The coefficient of linear thermal expansion is being determined for a range of room temperature up to 100 °C. The value indicates the extent to which the placed tile will expand due to temperature changes. This information should be taken into consideration during the determination of fugue thickness between the tiles.
- SRPS ISO 10545-9 Determination of thermal shock resistance – The tiles are exposed to abrupt temperature changes and afterwards the occurrence of damages is being checked.
- SRPS ISO 10545-10 Determination of moisture expansion – This standard establishes a method for determination of moisture expansion of ceramic tiles. The data help to determine the dimension between tiles.
- SRPS ISO 10545-11 Determination of crazing resistance of glazed surfaces – Occurrence of cracks on the surface of glazed tiles is performed after treating them with compressed steam at a pressure of 500 kPa and temperature of 159 °C, for two hours in an autoclave.
- SRPS ISO 10545-12 Determination of frost resistance – According to this method, the tiles are exposed to freezing and thawing within a temperature range from -5 °C to +5 °C, for at least 100 cycles. This testing simulates the product behavior in external climate conditions.
- SRPS ISO 10545-13 Determination of resistance to chemicals – This testing determines the tiles’ resistance to the effect of household chemicals, salts in the water of a swimming-pool, acid, base and resistance to the effect of a ‘pencil with HB hardness’. Depending on the type of chemicals and resistance of tiles, they are divided in the following classes:
Household chemicals and salts in the water of a swimming-pool
- A with no visible effects
- B small changes in the appearance or if the tiles did not pass the testing with a ‘pencil with HB hardness’
- C significant changes
- Acids and bases (low concentrations)
- LA with no visible effects
- LB small changes in the appearance or if the tiles did not pass the testing with a ‘pencil with HB hardness’
- LC significant changes
- Acids and bases (high concentrations)
- HA with no visible effects
- HB small changes in the appearance or if the tiles did not pass the testing with a ‘pencil with HB hardness’
- HC significant changes
- SRPS ISO 10545-14 Determination of stain resistance – The visible surface of the tiles is exposed to contact with assets that create stains, and classification is performed after removal. The classification is performed from 5 to 1 depending on the ease of removing the stains, whereupon the stains are most easily removed at class 5.

DIN 51130:2004-06 Determination of anti-slip properties for floor tiles

For bigger floor surfaces, industrial and commercial purposes, it is desirable that the friction coefficient is higher than the one used in houses. The German standard DIN 51130:2010-10 defines the procedure and serves for testing and classification of anti-slip properties of floor coverings which have been stipulated for use in working rooms and areas where danger of slipping exists. The accepted angle is determined on a floor coating with applied lubricated asset (oil) and the person who performs control with control shoes moves forward-backward on the floor coating which is being controlled and which starts to tilt from its horizontal state and the inclination increases up to an accepted angle, i.e. an angle when the controller reaches the boundary of safe walking. The accepted angle is used for assessment of the degree of slip resistance.

ACCEPTED ANGLE:	SLIP RESISTANCE CLASS:	RECOMMENDED IN:
6° do 10°	R 9	House entrances...
10° do 19°	R 10	Shops,workshops...
19° do 27°	R 11	Kitchens, laundry rooms...
27° do 35°	R 12	Great kitchens, dairies...
Over 35°	R 13	Areas with special requirements

DIN 51097:02.80 Determination of characteristics for prevention of slips

The characteristics of floor coatings according to this standard are assessed in conditions of moisture, on the treads of floor coverings which are used in bathrooms, changing rooms, toilets and similar rooms. During the execution of the procedure, a liquid is continuously and uniformly applied for testing the floor covering which will start to tilt from its horizontal position and the inclination will grow up to an accepted angle, i.e. an angle when the controller reaches the boundary of safe walking. The person who performs control moves forward-backward on the floor coating which is being controlled, barefoot. Depending on the achieved inclination angle, the tested coverings could be classified in the following groups:

MEAN VALUE OF ANGLE:	SLIP RESISTANCE CLASS:	RECOMMENDED IN:
≥ 12°	A	Bathrooms...
≥ 18°	B	Changing rooms, toilet...
≥ 24°	C	Areas with special requirements

The information about slip resistance of floor tiles is indicated next to the figures of floor tiles. Refers only to tiles that meet the slip resistance class (oil or water).

SRPS U.F2.011 Finishing works in structural engineering – Execution of ceramic works – The standard determines a procedure for wall and floor cladding with ceramic tiles inside of premises, as well as outside.

RECOMMENDATIONS DURING INSTALLATION

- Before installing wall tiles, they need to be immersed in water for better adhesion with the substrate.
- According to the standard SRPS U.F2.011, the tiles must compulsorily be placed with a fugue. The minimal fugue for wall and floor tiles is 3 mm,
- The substrate for placing the tiles should be dry (not freshly plastered) and without structural cracks.
- When buying the tiles, you must compulsorily pay attention to the designation of the caliber and the shade. Tiles with the same designations of caliber and shade should be put exceptionally in the same room.
- The digital mode of tile decoration is characterized by a larger number of faces with different appearance. Before final laying, it is recommendable to place few square meters of tiles to get a visual impression.
- When laying tiles with offset, the recommendation is that maximum offset is 30% of the length.
- After installation of tiles, claim is not possible, except for complaints about the hidden defects of the products, wich are related to the durability of the tiles by standard SRPS EN 14411.
- Industrial printer is printing: date, name of the product, class, shade, caliber of the product, id code of the classer for the tile, code and work sheet of product

FLOOR TILES-SRPS EN 14411, Group B Ia, Annex G

TECHNICAL CHARACTERISTICS	NORMS	TOLERANCE % / MM	
		SRPS EN 14411	KK
Length and width	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Thickness	SRPS ISO 10545-2	± 5,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Rectangularity	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Straightness of sides	SRPS ISO 10545-2	± 0,5 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Surface flatness	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	+ 0,20 % /- 0,1 % / max. (+ 1.5 /-0.5) mm
Appearance	SRPS ISO 10545-2	Min. 95% without visible defects	
Water absorption	SRPS ISO 10545-3	≤ 0,50 %	< 0,30 %
Breaking strength	SRPS ISO 10545-4	Thick. ≥ 7.5 mm 1300 N Thick. < 7.5 mm 700 N	> 1600 N > 1100 N
Modulus of rupture (bendingstrength)	SRPS ISO 10545-4	> 35 N/mm ² > 32 N/mm ²	> 40 N/mm ²
Wear resistance	SRPS ISO 10545-7	The abrasion class and number of cycles are recorded.	Declared by the manufacturer
Coefficient of linear thermal expansion	SRPS ISO 10545-8	Declared value	7×10 ⁻⁶ K ⁻¹
Resistance to thermal shock	SRPS ISO 10545-9	Declared value	Conforms
Crazing resistance	SRPS ISO 10545-11	Declared value	Conforms
Frost resistance	SRPS ISO 10545-12	Declared value	Conforms
Resistance to chemical products for domestic use	SRPS ISO 10545-13	Minimum B	A
Resistance to stains	SRPS ISO 10545-14	Minimum Class 3	Class 5

WALL TILES - SRPS EN 14411, Group B III, Annex K

TECHNICAL CHARACTERISTICS	NORMS	TOLERANCE % / MM	
		SRPS EN 14411	KK
Length and width	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Thickness	SRPS ISO 10545-2	± 10,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Rectangularity	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Straightness of sides	SRPS ISO 10545-2	± 0,3 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Surface flatness	SRPS ISO 10545-2	+ 0,5 % /- 0,3 % / max. (+ 2.0 /-1.5) mm	+ 0,25 % /- 0,1 % / max. (+ 1.5 /-0.5) mm
Appearance	SRPS ISO 10545-2	Min. 95% without visible defects	
Water absorption	SRPS ISO 10545-3	> 10,00 %	> 15,00 %
Breaking strength	SRPS ISO 10545-4	Thick. ≥ 7.5 mm 600 N Thick. < 7.5 mm 200 N	> 600 N
Modulus of rupture (bending strength)	SRPS ISO 10545-4	> 12 N/mm ² > 15 N/mm ²	> 15 N/mm ²
Coefficient of linear thermal expansion	SRPS ISO 10545-8	Declared value	7×10 ⁻⁶ K ⁻¹
Resistance to thermal shock	SRPS ISO 10545-9	Declared value	Conforms
Crazing resistance	SRPS ISO 10545-11	Declared value	Conforms
Resistance to chemical products for domestic use	SRPS ISO 10545-13	Minimum B	A
Resistance to stains	SRPS ISO 10545-14	Minimum Class 3	Class 5

IDENTIFICATION OF PRODUCTS ON BOXES AND ON PALLETS

In the process of automatic packaging, the ceramic tiles are packed in a cardboard boxes in which the industrial printer prints the basic data for identifying the product.

The first printed line contains: date, identification number of the classifier and product name. The second printed line contains: number of work order, product code, product class, product shade and caliber, that is, dimension of the floor tiles:

Each palette of finished product contains a barcode, which helps to identify the tiles.

CONDITIONS OF TILE AND DECOR PACKAGINGS

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE

FLOOR TILES GROUP B Ia

PACKAGING OF FLOOR TILES	FORMAT	THICKNESS OF TILE (MM)	M²/ PC	TILE/ BOX	M²/ BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M²/ PALLET	WEIGHT OF PALL. (KG)
	33 x 33	7,3	0,1089	16	1,742	27,04	42	73,164	1160,00
	45 x 45	8,2	0,2025	8	1,620	28,32	44	71,280	1270,00
	30 x 60	8,8	0,1800	6	1,080	19,32	48	51,840	965,00
	15 x 60	8,8	0,0900	11	0,990	18,81	56	55,440	1080,00

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE

RECTIFIED TILES

PACKAGING OF WALL TILES	FORMAT	THICKNESS OF TILE (MM)	M²/ PC	TILE/ BOX	M²/ BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M²/ PALLET	WEIGHT OF PALL. (KG)
	29,5 x 59	8,8	0,17405	6	1,044	18,36	48	50,112	910,00
	59 x 59	9,0	0,3481	4	1,392	25,20	30	41,760	780,00

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE

WALL TILES GROUP B III

PACKAGING OF WALL TILES	FORMAT	THICKNESS OF TILE (MM)	M²/ PC	TILE/ BOX	M²/ BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M²/ PALLET	WEIGHT OF PALL. (KG)
	25 x 50	8,8	0,1250	10	1,250	18,30	48	60,000	905,00
	20 x 60	9,0	0,1200	13	1,560	23,01	44	68,640	1040,00
	25 x 75	9,2	0,1875	7	1,312	20,37	48	62,976	1005,00
	25 x 50 D	8,8	0,1250	10	1,250	18,30	32	40,000	605,00
	20 x 60 D	9,0	0,1200	13	1,560	23,01	33	51,480	780,00
	25 x 75 D	9,2	0,1875	7	1,312	20,37	32	41,984	670,00

CERAMIC DECORS

PACKAGING OF CENTRAL DECORS	FORMAT	TILE/ BOX	WEIGHT OF BOX (KG)	BOX/PALLET	WEIGHT OF PALLET (KG)
	5050	6	24,198	30	750,00

PACKAGING OF DECORS	FORMAT	TILE/ BOX	WEIGHT OF BOX (KG)	BOX/PALLET	WEIGHT OF PALLET (KG)
	450L	22	7,3	60	460,00
	550L	11	4,5	60	290,00
	750L	11	6,6	60	415,00



Zidne pločice
Wall tiles



Otpornost na niske temperature
Low temperature resistance



Otpornost na habanje
Resistance to abrasion



Podne pločice
Floor tiles



Otpornost na hemikalije u domaćinstvu
Resistance to household chemicals



Otpornost na mrlje
Stain resistance



Mat površina
Matte surface



Protivkliznost površine (voda)
Anti-slip (water)



Broj lica
Number of faces



Sjajna površina
Glossy surface



Protivkliznost površine (ulje)
Anti-slip (oil)



Spoljna
Outdoor



Unutrašnja
Indoor



Novo
New



